arXiv:1203.3967v2 [cs.GT] 20 Aug 2012

Control Complexity in Bucklin, Fallback, and Plurality Voting: An Experimental Approach*

Jörg Rothe and Lena Schend
Institut für Informatik
Heinrich-Heine-Universität Düsseldorf
40225 Düsseldorf, Germany

February 27, 2013

Walsh [Wal10, Wal09], Davies et al. [DKNW10, DKNW11], and Narodytska et al. [NWX11] studied various voting systems empirically and showed that they can often be manipulated effectively, despite their manipulation problems being NP-hard. Such an experimental approach is sorely missing for NP-hard control problems, where control refers to attempts to tamper with the outcome of elections by adding/deleting/partitioning either voters or candidates. We experimentally tackle NP-hard control problems for Bucklin and fallback voting. Among natural voting systems with efficient winner determination, fallback voting is currently known to display the broadest resistance to control in terms of NP-hardness, and Bucklin voting has been shown to behave almost as well in terms of control resistance [ER10, EPR11, EFPR11]. We also investigate control resistance experimentally for plurality voting, one of the first voting systems analyzed with respect to electoral control [BTT92, HHR07].

Our findings indicate that NP-hard control problems can often be solved effectively in practice. Moreover, our experiments allow a more fine-grained analysis and comparison—across various control scenarios, vote distribution models, and voting systems—than merely stating NP-hardness for all these control problems.

*This work was supported in part by DFG grants RO 1202/15-1 and RO 1202/12-1 (within the EUROCORES programme LogICCC of the ESF), SFF grant "Cooperative Normsetting" of HHU Düsseldorf, and a DAAD grant for a PPP project in the PROCOPE programme. Author URLs: ccc.cs.uni-duesseldorf.de/~rothe, ccc.cs.uni-duesseldorf.de/~schend.

Contents

1. Introduction and Motivation **5**

2. Preliminaries **6**
2.1. Elections and Voting Systems 6
2.2. Electoral Control and Control Complexity 6
2.3. Control Complexity in Bucklin, Fallback, and Plurality Voting 8

3. Experimental Setting **8**

4. A High-Level Description of the Algorithms **9**
4.1. Algorithms for Voter Control 10
4.2. Algorithms for Candidate Control 11

5. Summary of Experimental Results **12**

6. Discussion and Conclusions **17**

A. Fallback Voting **21**
A.1. Constructive Control by Adding Candidates 21
A.1.1. Computation Costs 25
A.2. Destructive Control by Adding Candidates 28
A.2.1. Computational Costs 32
A.3. Constructive Control by Deleting Candidates 35
A.3.1. Computation Costs 39
A.4. Destructive Control by Deleting Candidates 42
A.4.1. Computational Costs 46
A.5. Constructive Control by Partition of Candidates in Model TE 49
A.5.1. Computational Costs 53
A.6. Destructive Control by Partition of Candidates in Model TE 56
A.6.1. Computational Costs 60
A.7. Constructive Control by Partition of Candidates in Model TP 63
A.7.1. Computational Costs 67
A.8. Destructive Control by Partition of Candidates in Model TP 70
A.8.1. Computational Costs 74
A.9. Constructive Control by Runoff Partition of Candidates in Model TE 77
A.9.1. Computational Costs 81
A.10. Destructive Control by Runoff Partition of Candidates in Model TE 84
A.10.1. Computational Costs 88
A.11. Constructive Control by Runoff Partition of Candidates in Model TP 91
A.11.1. Computational Costs 95
A.12. Destructive Control by Runoff Partition of Candidates in Model TP 98
A.12.1. Computational Costs 102
A.13. Constructive Control by Adding Voters 105
A.13.1. Computational Costs 109
A.14. Constructive Control by Deleting Voters 112
A.14.1. Computational Costs 116
A.15. Constructive Control by Partition of Voters in Model TE 119
A.15.1. Computational Costs 123

A.16. Destructive Control by Partition of Voters in Model TE . . . 126
A.16.1. Computational Costs . . . 130
A.17. Constructive Control by Partition of Voters in Model TP . . . 133
A.17.1. Computational Costs . . . 137
A.18. Destructive Control by Partition of Voters in Model TP . . . 140
A.18.1. Computational Costs . . . 144

B. Bucklin Voting **147**
B.1. Constructive Control by Adding Candidates . . . 147
B.1.1. Computational Costs . . . 151
B.2. Destructive Control by Adding Candidates . . . 154
B.2.1. Computational Costs . . . 158
B.3. Constructive Control by Deleting Candidates . . . 161
B.3.1. Computational Costs . . . 165
B.4. Destructive Control by Deleting Candidates . . . 168
B.4.1. Computational Costs . . . 172
B.5. Constructive Control by Partition of Candidates in Model TE . . . 175
B.5.1. Computational Costs . . . 179
B.6. Destructive Control by Partition of Candidates in Model TE . . . 182
B.6.1. Computational Costs . . . 186
B.7. Constructive Control by Partition of Candidates in Model TP . . . 189
B.7.1. Computational Costs . . . 193
B.8. Destructive Control by Partition of Candidates in Model TP . . . 196
B.8.1. Computational Costs . . . 200
B.9. Constructive Control by Runoff Partition of Candidates in Model TE . . . 203
B.9.1. Computational Costs . . . 207
B.10. Destructive Control by Runoff Partition of Candidates in Model TE . . . 210
B.10.1. Computational Costs . . . 214
B.11. Constructive Control by Runoff Partition of Candidates in Model TP . . . 217
B.11.1. Computational Costs . . . 221
B.12. Destructive Control by Runoff Partition of Candidates in Model TP . . . 224
B.12.1. Computational Costs . . . 228
B.13. Constructive Control by Adding Voters . . . 231
B.13.1. Computational Costs . . . 235
B.14. Constructive Control by Deleting Voters . . . 238
B.14.1. Computational Costs . . . 242
B.15. Constructive Control by Partition of Voters in Model TE . . . 245
B.15.1. Computational Costs . . . 249
B.16. Destructive Control by Partition of Voters in Model TE . . . 252
B.16.1. Computational Costs . . . 256
B.17. Constructive Control by Partition of Voters in Model TP . . . 259
B.17.1. Computational Costs . . . 263
B.18. Destructive Control by Partition of Voters in Model TP . . . 266
B.18.1. Computational Costs . . . 270

C. Plurality Voting **273**
C.1. Constructive Control by Adding Candidates . . . 273
C.1.1. Computational Costs . . . 277
C.2. Destructive Control by Adding Candidates . . . 280
C.2.1. Computational Costs . . . 284

C.3. Constructive Control by Deleting Candidates . . . 287
C.3.1. Computational Costs . . . 291
C.4. Destructive Control by Deleting Candidates . . . 294
C.4.1. Computational Costs . . . 298
C.5. Constructive Control by Partition of Candidates in Model TE . . . 301
C.5.1. Computational Costs . . . 305
C.6. Destructive Control by Partition of Candidates in Model TE . . . 308
C.6.1. Computational Costs . . . 312
C.7. Constructive Control by Partition of Candidates in Model TP . . . 315
C.7.1. Computational Costs . . . 319
C.8. Destructive Control by Partition of Candidates in Model TP . . . 322
C.8.1. Computational Costs . . . 326
C.9. Constructive Control by Runoff Partition of Candidates in Model TE . . . 329
C.9.1. Computational Costs . . . 333
C.10. Destructive Control by Runoff Partition of Candidates in Model TE . . . 336
C.10.1. Computational Costs . . . 340
C.11. Constructive Control by Runoff Partition of Candidates in Model TP . . . 343
C.11.1. Computational Costs . . . 347
C.12. Destructive Control by Runoff Partition of Candidates in Model TP . . . 350
C.12.1. Computational Costs . . . 354
C.13. Constructive Control by Partition of Voters in Model TP . . . 357
C.13.1. Computational Costs . . . 361
C.14. Destructive Control by Partition of Voters in Model TP . . . 364
C.14.1. Computational Costs . . . 368

1. Introduction and Motivation

Electoral control [BTT92, HHR07] refers to attempts to tamper with the outcome of elections by adding/deleting/partitioning either the voters or the candidates. To protect elections against such control attempts and other ways of manipulation (see, e.g., the surveys [FHH10, FP10]), much work has been done recently to show that the attacker's task can be computationally hard: Certain voting systems are resistant to manipulation [FHH10, FP10, CSL07] or control [BTT92, HHR07, ER10, EPR11] in certain scenarios. However, most of this work is concerned with NP-hardness results, which is a worst-case measure of complexity and leaves open the possibility that many elections can still be manipulated or controlled in a reasonable amount of time.

To avoid this disadvantage, manipulation and control problems have also been tackled from different angles. For example, from a theoretical perspective, Zuckerman et al. [ZPR09] proposed approximation algorithms for NP-hard manipulation problems and Faliszewski et al. [FHHR11] showed that restricting to single-peaked electorates may strip manipulation and control problems off their NP-hardness shields. From an experimental perspective, in a series of papers Walsh et al. [Wal10, Wal09, DKNW10, DKNW11] (see also [CT07]) studied various voting systems empirically, such as single transferable vote (STV), veto, and Borda, and showed that they can often be manipulated effectively, even though their manipulation problems are NP-hard. Such an experimental approach is sourly missing for NP-hard control problems to date.

This paper is the first attempt to tackle NP-hard control problems via an experimental analysis. Among natural voting systems with efficient winner determination, the system currently known to display the broadest resistance (NP-hardness) to control is fallback voting, proposed by Brams and Sanver [BS09] via combining approval with Bucklin voting. Erdélyi et al. [ER10, EPR11] showed that fallback voting is resistant to 20 out of the 22 standard types of control and that Bucklin voting behaves almost as good. Shortly after these results with all proofs were made public in a technical report dated March 11, 2011, [EFPR11], Menton [Men12] reported analogous results for normalized range voting (the version of his technical report that establishes a matching number of resistances is dated April 25, 2011).

We empirically investigate six voter control scenarios for Bucklin and fallback voting and two for plurality voting. Furthermore we investigate twelve candidate control scenarios for all three voting systems[1], i.e., while Walsh et al. [Wal10, Wal09, DKNW10, DKNW11] focused on *constructive* manipulation problems only (where the aim is to make a candidate win), we study both *constructive* and *destructive* control problems (the latter aiming at preventing some candidate's victory). When generating random elections in our experiments, we consider two probability distributions: the *Impartial Culture model* (where votes are distributed uniformly and are drawn independently) and the *Two Mainstreams model*, introduced here to model two mainstreams in society by adapting the *Polya Eggenberger urn model* [Ber85].

After introducing the investigated voting systems and types of electoral controls in Section 2, we present the experimental setting and implemented algorithms in Sections 3 and 4. Section 5 summarizes some of our findings and observations for particular control scenarios. We conclude by providing a brief discussion of the main findings of our experiments in Section 6, which allow a more fine-grained analysis and comparison—across various control scenarios, vote distribution models, and voting systems—than merely stating NP-hardness for all these problems. A comprehensive presentation of all results can be found in the appendix.

[1] Note that there are overall eight voter control scenarios but we only analyze those where for the corresponding control problem no deterministic polynomial-time algorithm is known. Furthermore we do not analyze two types of control by adding candidates, namely the case where the number of candidates that can be added is not limited, so that we investigate 18 of the 22 known types of electoral control.

2. Preliminaries

2.1. Elections and Voting Systems

An *election* is a pair (C,V) consisting of a finite candidate set $C = \{c_1, c_2, \ldots, c_m\}$ and a finite list of voters $V = (v_1, v_2, \ldots, v_n)$ expressing their preferences over the candidates in C. How the votes are represented depends on the voting system used. A *voting system* $\mathscr{E}$ determines how the voters' ballots are cast and who has won a given election (C,V), where the set $W \subseteq C$ of winners may be empty or have one or more elements. We call an election with votes cast according to a voting system $\mathscr{E}$ an *$\mathscr{E}$ election*. Here we focus on the systems Bucklin voting, fallback voting, and plurality voting.

Bucklin voting is a preference-based voting system named after James W. Bucklin [HH26]. "Preference-based" means that the voters' ballots are (strict) linear orders over all candidates in C. For example, if $C = \{c_1, c_2, c_3\}$ and a vote v is given by $c_2\,c_1\,c_3$, then this voter v strictly prefers c_2 to c_1 and c_1 to c_3.

Let (C,V) be a given Bucklin election. The *level i score of a candidate $c \in C$* ($score^i_{(C,V)}(c)$, for short) is the number of voters in V ranking c among their top i positions. Letting the *strict majority threshold* of a list V of votes be $maj(V) = \lfloor \|V\|/2 \rfloor + 1$, the *Bucklin score of $c \in C$* is defined to be the smallest i such that $score^i_{(C,V)}(c) \geq maj(V)$. Every candidate with the smallest Bucklin score (say ℓ) and the highest level ℓ score is a *level ℓ Bucklin winner* (*BV winner*, for short). Note that there always exists a Bucklin winner, level 1 Bucklin winners are always unique, but on levels $\ell \geq 2$ there can be more than one BV winner.

Fallback voting is a hybrid voting system introduced by Brams and Sanver [BS09]. It combines Bucklin voting with *approval voting* [BF83]. In a fallback election, each voter determines those candidates he or she approves of and provides a linear order of the approved candidates. So for $C = \{c_1, c_2, c_3\}$ a vote in a fallback election could be of the form $c_3\,c_1$ meaning that this voter approves of c_1 and c_3, strictly preferring c_3 to c_1, and disapproves of c_2.

Winners are determined as follows in fallback voting: Given a fallback election (C,V), the notions of *level i score* of a candidate $c \in C$ and *level i fallback winner* are defined analogously as in Bucklin voting. If there is a level ℓ fallback winner with $\ell \leq \|C\|$, then he or she is the *fallback winner in* (C,V). Otherwise (i.e., if no fallback winner exists in (C,V)), every candidate with a highest *approval score* (which is the number of voters approving of this candidate) is a *fallback winner in* (C,V). The second case can occur in fallback elections, since the voters can prevent the candidates from gaining points, and so it is possible that no candidate reaches or exceeds the strict majority threshold on any level.

Note that Bucklin elections can be seen as fallback elections where each voter approves of all candidates. So Bucklin voting is a special case of fallback voting.

In *plurality voting*, the most preferred candidate in each vote gains one point, and the candidates with the most points are the *plurality winners*. Note that there always exists at least one plurality winner. This voting rule is preference-based as well, even though the ranking of the candidates after the top candidate is irrelevant.

2.2. Electoral Control and Control Complexity

Electoral control is a way to tamper with the outcome of an election by changing the structure of the election itself [BTT92, HHR07]. These structural changes include adding, deleting, and partitioning voters or candidates. In the model of electoral control these changes are exerted by an external actor, the "chair," having full knowledge of the voters' preferences. For a detailed discussion of why and where this assumption is appropriate when investigating control complexity, see [HHR07]. Bartholdi et al. [BTT92] introduced the notion of *constructive control* where the chair's goal is to make a distinguished candidate end up winning alone the resulting election. The case where the chair's control action aims at preventing a given candidate from being a unique winner is called *destructive control* and has been introduced by Hemaspaandra et al. [HHR07].

To study the complexity of control in different scenarios, a decision problem is defined for each type of electoral control.

$\mathscr{E}$-CONSTRUCTIVE CONTROL BY DELETING VOTERS ($\mathscr{E}$-CCDV)	
Given:	An $\mathscr{E}$ election (C,V), a distinguished candidate $c \in C$, and a positive integer $k \leq \|V\|$.
Question:	Is there a subset $V' \subseteq V$ with $\|V'\| \leq k$ such that c is the unique $\mathscr{E}$ winner of election $(C, V - V')$?

$\mathscr{E}$-CONSTRUCTIVE CONTROL BY ADDING VOTERS ($\mathscr{E}$-CCAV)	
Given:	An $\mathscr{E}$ election $(C, V \cup V')$, where $V \cap V' = \emptyset$ and V is the list of registered voters and V' is the list of unregistered voters, a distinguished candidate $c \in C$, and a positive integer $k \leq \|V'\|$.
Question:	Is there a subset $V'' \subseteq V'$ with $\|V''\| \leq k$ such that c is the unique $\mathscr{E}$ winner of election $(C, V \cup V'')$?

Constructive control by partition of voters is modeled via a two-stage election, where in the first stage V is partitioned into V_1 and V_2 and the winners (subject to the tie-handling rule used, see below) of subelections (C,V_1) and (C,V_2) run against each other in the final stage, with respect to V. Hemaspaandra et al. [HHR07] introduced the tie-handling rules "Ties Promote" (TP) in which all subelection winners participate in the runoff, and "Ties Eliminate" (TE) in which only a unique winner from either subelection can move on to the runoff (if there is more than one winner, none of them moves on).

$\mathscr{E}$-CONSTRUCTIVE CONTROL BY PARTITION OF VOTERS ($\mathscr{E}$-CCPV)	
Given:	An $\mathscr{E}$ election (C,V) and a distinguished candidate $c \in C$.
Question:	Is there a partition (V_1,V_2) of V such that c is the unique $\mathscr{E}$ winner of election $(W_1 \cup W_2, V)$, where W_i, $i \in \{1,2\}$, is the set of $\mathscr{E}$ winners of subelection (C,V_i) surviving the tie-handling rule?

Depending on the tie-handling rule used, we obtain the problems $\mathscr{E}$-CCPV-TP and $\mathscr{E}$-CCPV-TE. For the destructive cases, we simply ask whether it is possible to *prevent* the distinguished candidate from being a unique winner, yielding the destructive control problems $\mathscr{E}$-DCDV, $\mathscr{E}$-DCAV$\mathscr{E}$-DCPV-TP, and $\mathscr{E}$-DCPV-TE. Each of the four problems just defined models "two-district gerrymandering."

$\mathscr{E}$-CONSTRUCTIVE CONTROL BY DELETING CANDIDATES ($\mathscr{E}$-CCDC)	
Given:	An $\mathscr{E}$ election (C,V) and a distinguished candidate $c \in C$.
Question:	Does there exist a subset $C' \subseteq C$ such that $\|C'\| \leq k$ and c is the unique $\mathscr{E}$ winner of election $(C - C', V)$

$\mathscr{E}$-CONSTRUCTIVE CONTROL BY ADDING CANDIDATES ($\mathscr{E}$-CCAC)	
Given:	An $\mathscr{E}$ election $(C \cup D, V)$, $C \cap D = \emptyset$, a distinguished candidate $c \in C$, and a nonnegative integer k. (C is the set of originally qualified candidates and D is the set of spoiler candidates that may be added.)
Question:	Does there exist a subset $D' \subseteq D$ such that $\|D'\| \leq k$ and c is the unique $\mathscr{E}$ winner of election $(C \cup D', V)$?

$\mathscr{E}$-CONSTRUCTIVE CONTROL BY PARTITION OF CANDIDATES ($\mathscr{E}$-CCPC)	
Given:	An $\mathscr{E}$ election (C,V) and a distinguished candidate $c \in C$.
Question:	Is it possible to partition C into C_1 and C_2 such that c is the unique $\mathscr{E}$ winner of election $(W_1 \cup C_2, V)$, where W_1 is the set of $\mathscr{E}$ winners of subelection (C_1,V)

$\mathscr{E}$-CONSTRUCTIVE CONTROL BY RUNOFF-PARTITION OF CANDIDATES ($\mathscr{E}$-CCRoPC)	
Given:	An $\mathscr{E}$ election (C,V) and a distinguished candidate $c \in C$.
Question:	Is it possible to partition C into C_1 and C_2 such that c is the unique $\mathscr{E}$ winner of election $(W_1 \cup W_2, V)$, where W_i, $i \in \{1,2\}$, is the set of $\mathscr{E}$ winners of subelection (C_i,V)?

Control by	Fallback Voting		Bucklin Voting		Plurality Voting	
	Constr.	Destr.	Constr.	Destr.	Constr.	Destr.
Adding Candidates	R	R	R	R	R	R
Deleting Candidates	R	R	R	R	R	R
Partition of Candidates	TE: R	TE: R	TE: R	TE: R	TE: R	TE: R
	TP: R	TP: R	TP: R	TP: R	TP: R	TP: R
Runoff-Partition of Candidates	TE: R	TE: R	TE: R	TE: R	TE: R	TE: R
	TP: R	TP: R	TP: R	TP: R	TP: R	TP: R
Adding Voters	R	V	R	V	V	V
Deleting Voters	R	V	R	V	V	V
Partition of Voters	TE: R	TE: R	TE: R	TE: R	TE: V	TE: V
	TP: R	TP: R	TP: R	TP: S	TP: R	TP: R

Table 1: Known results on the control complexity of fallback, Bucklin, and plurality voting. Key: R means resistance, V means vulnerability, and S means susceptibility.

Summing up, we now have defined twelve candidate control problems and thus a total of 20 control problems. Note that the classic standard control scenarios include a version of control by adding candidates where the number of candidates that may be added is not bound by a constant given in the instance. With that we have fourteen candidate control problems and 22 different types of control but we do not consider these two cases in our experimental analysis.

Let $\mathfrak{C}$ be a type of electoral control. Using the notions defined by Bartholdi et al. [BTT92] (see also [HHR07]), we say a voting system $\mathscr{E}$ is *immune to* $\mathfrak{C}$ if the chair never succeeds in exerting control of type $\mathfrak{C}$. If $\mathscr{E}$ is not immune to $\mathfrak{C}$, it is *susceptible to* $\mathfrak{C}$. If $\mathscr{E}$ is susceptible to a control type $\mathfrak{C}$, we say it is *vulnerable to* $\mathfrak{C}$ if the corresponding decision problem is decidable in deterministic polynomial time, and we say it is *resistant to* $\mathfrak{C}$ if the corresponding decision problem is NP-hard.

2.3. Control Complexity in Bucklin, Fallback, and Plurality Voting

Plurality voting is one of the first voting systems for which the complexity of constructive control [BTT92] and destructive control [HHR07] has been studied in the above scenarios. Control in fallback voting and Bucklin voting has been previously studied by Erdélyi et al. [ER10, EPR11] with respect to classical complexity and also with respect to parameterized complexity [EF10]. In terms of NP-hardness, among natural systems with polynomial-time winner determination fallback voting has the most resistances to control (namely, 20 out of the 22 standard control types) and Bucklin voting behaves similarly well—just one case is open (Bucklin-DCPV-TP). Table 1 gives an overview of known complexity results for electoral control in these three systems.

3. Experimental Setting

In this section we describe the experimental setting. As stated in Section 2.2, the instances of control by adding and deleting both candidates and voters contain a parameter k bounding the number of candidates/voters that can be deleted or added. In our experiments, we confine ourselves to the case of $k = \lfloor n/3 \rfloor$, where n is the number of voters. Since every yes-instance for a given k is also a yes-instance for $k' \geq k$, the number of yes-instances found in our experiments are a lower bound for the number of yes-instances when more voters can be deleted or added.

We randomly generated elections (C,V) with $m = \|C\|$ and $n = \|V\|$ for all combinations of $n,m \in \{4,8,16,32,64,128\}$. Each combination of n and m is one data point for which we evaluated 500 of these

elections, trying to determine for each given election whether or not control is possible. How the elections have been generated and how the algorithms are designed will be described below.

Before we specify the different distribution models underlying our election generation, we explain how random votes can be cast in Bucklin and fallback voting and how many different votes exist in both voting systems.

Assuming that the generated election has m candidates, in Bucklin voting a random vote can be obtained by generating a random permutation over the m different candidates. Clearly, the overall number of different votes in Bucklin elections is $m!$.

In fallback voting random votes can be generated as follows: In a first step, a preference (i.e., linear order) p over all m candidates is drawn randomly under a certain distribution (see below) from all $m!$ possible preferences. In a second step, the number of approved candidates, say ℓ, is drawn from the possible numbers $\{0,1,2,\ldots,m\}$. The preference p and ℓ are drawn independently. Then, the generated vote consists of the first ℓ candidates in p. Generalizing this, we know that there can be $\sum_{\ell=0}^{m}\binom{m}{\ell}l!$ different votes in fallback elections with m candidates. With this in mind, we now specify the two distribution models we will be working with.

In the *Impartial Culture model* (*IC model*) we assume uniformly distributed votes and draw each vote independently out of all possible preferences.

In the second model, which we call the *Two Mainstreams model* (*TM model*), we adapt the *Polya Eggenberger urn model* (*PE model*, see [Ber85]) that has been used by Walsh [Wal10] in the following way: We draw two votes out of an urn containing all possible, say t, votes (with $t = m!$ or $t = \sum_{\ell=0}^{m}\binom{m}{\ell}\ell!$, depending on the voting system). Each of these votes can be interpreted as a representative of one "main stream" in society (e.g., liberal and conservative). Then each vote is put back into the urn with k additional votes of the same form. Out of this urn the votes for the election are drawn randomly with replacement. So we have that each voter's preference is with probability $1/3$ from the first mainstream, with probability $1/3$ from the second mainstream, and with probability $1/3$ it is a different preference. The main difference to the above-mentioned Polya Eggenberger urn model is that the voters do not influence each other. We do have correlated votes in the sense that with a certain probability voters vote like other voters but there are no direct dependencies between the voters, whereas in the PE model the preference of the first voter influences the preference of the second voter, who in turn influences the preference of the third voter, and so on. Of course, an investigation of control in elections generated in this model could be interesting as well but we postpone this to future work.

Note that for control by adding voters, a second list of votes has to be generated, namely the ballots of the unregistered voters that may be added. In our setting, the list of unregistered voters is of the same size as the list of registered voters and both lists are generated with the same underlying distribution model.

4. A High-Level Description of the Algorithms

All algorithms for the different types of control share the same essential method of testing various subsets, and they differ only in the type of preordering and internal testing.

Before actually searching for a successful sublist of voters or subset of candidates, the algorithms check conditions that would indicate that the given instance is a no-instance. If the tested conditions do not hold the candidates or voters are preordered to ensure that the algorithm tries promising subsets or sublists first. Depending on the control type at hand some of the following conditions are tested.

Condition 1: The distinguished candidate is positioned on the last place in every vote, or is positioned on the last place or is disapproved by every voter if (C,V) is a fallback election.

Condition 2: For each $k' \leq k$, determine the smallest i and j such that

$$score^{i}_{(C,V)}(c') \geq \lfloor (\|V\|-k')/2 \rfloor + 1 + k' \quad \text{and} \quad score^{j}_{(C,V)}(c) \geq \lfloor (\|V\|-k')/2 \rfloor + 1$$

hold for $c' \in C - \{c\}$. It holds that $i \leq j-1$ for all $k' \leq k$.

Condition 3: For each $k' \leq k$ determine the smallest i and j such that

$$score^{i}_{(C,V)}(c') \geq \lfloor (\|V\| + k')/2 \rfloor + 1 \quad \text{and} \quad score^{j}_{(C,V)}(c) \geq \lfloor (\|V\| + k')/2 \rfloor + 1 - k'$$

hold for $c' \in C - \{c\}$. It holds that $i \leq j - 1$ for all $k' \leq k$.

Condition 4: In the given election, the winner has a strict majority on the first level.

Condition 1 is tested for every constructive control type except the partition of candidates cases (with and without runoff).

In the following sections we will describe the different algorithms for the different types of electoral controls and the implemented preorderings.

4.1. Algorithms for Voter Control

We begin with the algorihtms for the voter control cases. For both constructive control by adding and deleting voters, Condition 1 is tested. Note that for the adding voter cases this condition has to hold for both voter lists, the registered voters and the unregistered voters.

For constructive control by deleting voters, Condition 2 is additionally tested. If Condition 2 holds, c cannot be made a unique winner by deleting at most k voters because even if all k voters would harm the strongest rival c' of c the most and c not at all, the rival would still reach a strict majority on a lower level than c.

For constructive control by adding voters, Condition 1 and 3 are tested. If Condition 3 holds for the given election and the given distinguished candidate c, then even if all added voters helped only c on the lowest level, there would still be at least one other candidate reaching a strict majority on a level lower than c.

For the voter-partition cases, we have Condition 4 indicating that control is not possible for both the constructive and destructive case, namely that in the given election there is a unique winner on the first level. It is easy to see that for every possible partition (V_1, V_2) of V a level 1 winner is also a level 1 winner in at least one of the subelections. Since level 1 winners are always unique, independent of the tie-handling model, this candidate always participates in the runoff and will therefore always be the unique level 1 winner of the resulting two-stage election. So no distinguished candidate can ever be made the unique winner by partitioning the voters. So the algorithms for destructive and constructive control by partition of voters first check Condition 4 where the latter checks Condition 1 as well.

After having excluded these trivial cases, the different algorithms search for a successful sublist of V after having ordered the voters.

We will describe this procedure for constructive control by deleting voters where the voters are ordered ascending for c. That is, after the preordering v_1 is a voter positioning c worst and v_n is a voter positioning c best among all voters. In fallback voting, the "worst position" for a candidate is to be not approved at all. The algorithm now starts with deleting those votes c benefits least of. It follows the procedure of a depth-first search on a tree of height k that is structured as shown in Figure 1.

In each node, it is tested whether deleting the voters on the path is a successful control action. So on the path $s \to 1 \to 2 \to 3$ the algorithm tests the sublists $(v_1), (v_1, v_2), (v_1, v_2, v_3)$ and then tracks back testing the sublists $(v_1, v_2, v_4), (v_1, v_2, v_5), (v_1, v_3), (v_1, v_3, v_4)$, and so on. The branches on the left side are visited first and due to the preordering of the votes, these are the votes c benefits least of.

For the adding-voters case, the voters in the list of unregistered voters are ordered in a descending order for the distinguished candidate and the algorithm proceeds similar to the algorithm for the deleting-voters case, trying to find a successful sublist for the control. With this preordering, the algorithm first tests those voters the distinguished candidate can benefit most from when these are added to the voter list.

For the partition cases the algorithm considers every possible sublist of the voter list up to size $k = \lfloor n/2 \rfloor$ as V_1, sets $V_2 = V - V_1$, and tests whether this is a successful control action or not. For the constructive cases the voters are preordered descendingly with respect to the distinguished candidate whereas for the destructive control cases no preordering is implemented.

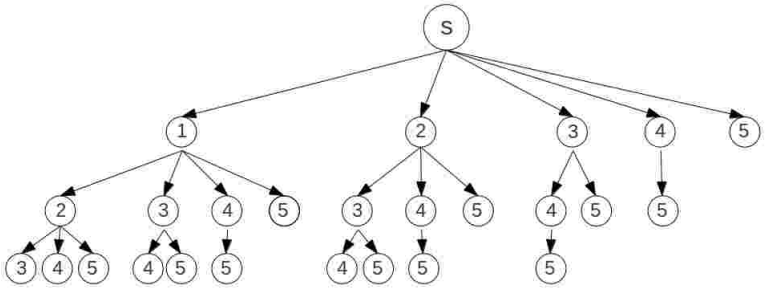


Figure 1: Tree for $n = 5$ voters where up to $k = 3$ voters may be deleted. A node i corresponds to voter v_i after the preordering.

4.2. Algorithms for Candidate Control

The algorithms for the candidate control scenarios test Condition 1 in the constructive cases except where the candidates are partitioned. For the destructive cases, on the other hand, Condition 4 is always tested. Note that for the adding candidates cases both conditions must hold in the election over both the registered and the unregistered candidates.

After testing for trivial instances the algorithms make use of the same approach of testing systematically preordered candidate subsets to find a successful control action. Here, the candidates are also ordered with respect to the distinguished candidate, where a descending order means that the first candidate has the most voters positioning him or her before the distinguished candidate and the last candidate has the fewest voters doing that. An ascending order is defined analogously. Again, in the adding candidates case, the votes over all candidates (including the unregistered) are considered.

The descending ordering is used for finding control actions for the constructive case of deleting candidates and the destructive cases of adding and partitioning candidates with and without runoff. In the costructive case of the deleting candidates scenario we want to make the distinguished candidate the winner, so the algorithm tries to delete those candidates whose deletion moves the distinguished candidate forward in as many votes as possible. On the contrary the algorithm for destructive control by adding candidates tries to prevent the distinguished candidate from winning, so candidates are added that move the distinguished candidate back in as many votes as possible. The algorithm for both destructive cases of partition of candidates assignes the distinguished candidate to the subset C_1 and tries to prevent him or her from moving to the final election. So the other participants in C_1 are chosen from the remaining candidates after having ordered them descending with respect to the distinguished candidate.

With analog arguments it is obvious that an ascending order of the candidates with respect to the distinguished candidate is used for the destructive case of deleting candidates, the destructive case of adding candidates, and the constructive case of partition of candidates. Note that the algorithm for constructive control by partition of candidates positions the distinguished candidate in C_2 and assigns those other candidates to C_2 that are positioned behind the distinguished candidate in as many votes as possible since those are direct rivals for the distinguished candidate in the final election.[2]

Obviously, in the worst-case, the algorithms check all possible subsets of size at most k, so they have a worst-case running time of $\sum_{\ell=1}^{k} \binom{n}{\ell}$. To handle the worst-case scenarios, a time limit of ten minutes has been

[2]Recall that the candidates in C_2 participate directly in the final round whereas those candidates in C_1 have to compete against each other in a pre-round election.

implemented such that the algorithms stop when exceeding this limit, indicating by the output that the search process is aborted unsuccessfully. Setting the time limit higher can only increase the number of yes-instances, so again, the results obtained in our experiments give a lower bound for the number of yes-instances in the generated elections. In our experiments we implemented the same timeout value for all investigated types of control. As our results in Section 5 will show, the different control types react differently to this constant timeout threshold, so tuning of the timeout-parameter would be an interesting issue for further experiments. Also, varying the timeout value with respect to the election size at hand might be an interesting approach.

The algorithms and data-generation programs are implemented in *Octave 3.2* and the experiments were run on a 2,67 GHz Core-I5 750 with 8GB RAM.

5. Summary of Experimental Results

Tables 2 and 3 summarize our experimental results on control in Bucklin, fallback, and plurality voting. We investigated the three voting systems only for those control types they are not known to be vulnerable to, which is indicated by an R- or an S-entry in Table 1. That is, destructive control by adding and by deleting voters (DCAV and DCDV) are omitted in Tables 2 and 3. Also, since our algorithms use the parameter k bounding the number of candidates to be added, constructive and destructive control by adding an unlimited number of candidates (CCAUC and DCAUC) are not considered either. For each combination of any of the remaining 18 control types, any of the two voting systems Bucklin and fallback voting, and any of the two distribution models (IC and TM), we tested a total of $18,000 = 36 \cdot 500$ elections, varying over the 36 data points with different values for m and n, as explained above. This gives a total of $1,296,000 = 18 \cdot 4 \cdot 18,000$ generated and tested elections. For plurality voting we investigated fourteen types of electoral control leading to $504,000 = 14 \cdot 2 \cdot 18,0000$ generated and tested elections.

Tables 2 and 3 give an overview of the percentage of timeouts for each such combination of control type/voting system/distribution model, and also the minimal and maximal percentage of yes-instances observed. We do not discuss the results for all these cases in detail here. Rather, we will focus on adding/deleting candidates/voters and partition of voters to very briefly discuss some observations from our experiments, to exemplify some of the numbers in Tables 2 and 3. For those cases that we discuss in detail, we provide plots giving the percentage of yes-instances, timeouts, and average computational costs for all different election sizes that were tested. Note that a comprehensive presentation of all results containing the above information for all cases can be found in the appendix.

Constructive Control by Deleting and by Adding Voters:

We here briefly discuss some results for control by deleting voters only, since those for control by adding voters are very similar, in both Bucklin and fallback voting.

In the IC model, increasing the number of candidates decreases the number of yes-instances in the generated Bucklin elections as can be seen in Figure 2 showing the results for control by deleting voters for Bucklin voting in the IC model. On the other hand, the number of yes-instances increases with the number of voters growing. In the Two Mainstreams model, the same correlations can be observed but here, again, the total number and percentage of yes-instances is smaller than in the IC model.

Fallback voting behaves very similarly, so for both distributions and both voting systems increasing the number of candidates makes successful actions of control by deleting voters less likely.


In both voting systems and in both distribution models, timeouts occur whenever the number of voters exceeds 32. If the number of candidates is 128, we have timeouts already with 16 voters. This can also be seen in the development of the computational costs shown in Figure 2c after the peak for $n = 16$. For bigger electorates the average computational costs drop since the number of timeouts increases with the number of no-instances diminishing.

	Fallback Voting						Bucklin Voting					
	min		max		to		min		max		to	
	IC	TM	IC	TM	IC	TM	IC	TM	IC	TM	IC	TM
CCAC	1	0	11	7	51	50	0	0	23	11	50	49
DCAC	53	39	92	71	11	14	71	42	99	77	6	12
CCDC	13	15	33	36	37	37	13	17	58	45	34	37
DCDC	8	12	78	63	15	22	48	25	99	77	7	18
CCPC-TE	0	0	19	18	62	64	1	0	57	37	57	62
DCPC-TE	8	16	88	65	18	29	49	29	100	78	10	23
CCPC-TP	1	0	17	17	62	64	1	0	60	38	57	61
DCPC-TP	8	16	87	61	18	29	49	29	100	82	9	23
CCRoPC-TE	1	1	18	14	62	63	1	0	60	45	57	62
DCRoPC-TE	8	16	86	68	20	29	46	29	100	84	9	23
CCRoPC-TP	1	0	19	14	62	63	1	1	56	25	53	61
DCRoPC-TP	8	16	85	68	21	29	45	27	100	81	10	23
CCAV	4	1	99	41	13	13	2	1	99	41	11	6
CCDV	2	1	97	39	16	12	2	1	100	42	11	7
CCPV-TE	2	0	97	34	9	45	2	0	98	32	8	44
DCPV-TE	50	34	100	88	4	16	64	40	100	89	4	10
CCPV-TP	1	1	53	20	40	50	1	0	72	23	31	48
DCPV-TP	37	27	100	87	6	17	60	39	100	88	3	10

Table 2: Overview of experimental results on control in Bucklin and fallback voting. Key: The "min" and "max" columns give the minimal and maximal percentage of yes-instances observed in all tested instances for the given control type, including those elections where timeouts occured; "to" gives the percentage of timeouts that occurred for the total of 18,000 elections tested in this control case.

	Plurality Voting					
	min		max		to	
	IC	TM	IC	TM	IC	TM
CCAC	0	0	20	3	50	34
DCAC	70	47	99	60	7	25
CCDC	5	22	66	40	37	35
DCDC	8	12	78	63	15	22
CCPC-TE	0	0	60	21	58	65
DCPC-TE	1	2	100	59	22	41
CCPC-TP	0	0	64	24	58	65
DCPC-TP	1	3	100	59	22	44
CCRPC-TE	0	0	65	19	50	63
DCRPC-TE	25	14	100	61	12	37
CCRPC-TP	0	0	65	21	50	61
DCRPC-TP	23	14	100	61	13	35
CCPV-TP	0	0	54	13	24	23
DCPV-TP	55	15	100	59	4	35


Table 3: Overview of experimental results on control in plurality voting. Key: The "min" and "max" columns give the minimal and maximal percentage of yes-instances observed in all tested instances for the given control type, including those elections where timeouts occurred; "to" gives the percentage of timeouts that occurred for the total of 18,000 elections tested in this control case.

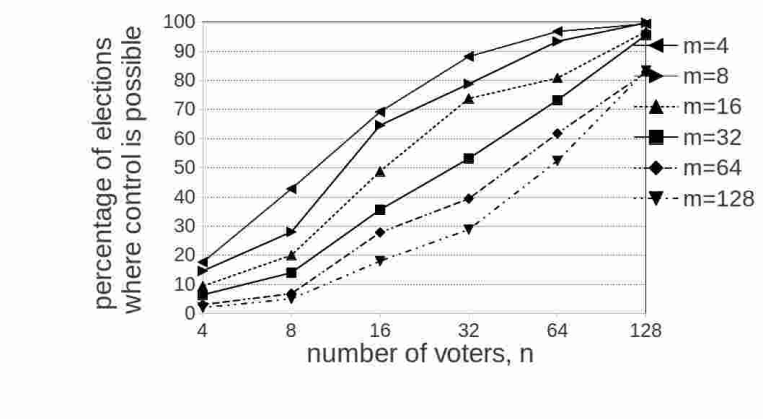

(a) Percentage of yes-instances.

m\n	4	8	16	32	64	128
4	0	0	0	10	3	1
8	0	0	0	20	7	0
16	0	0	0	23	19	13
32	0	0	0	39	27	4
64	0	0	1	49	38	17
128	0	0	31	53	47	17

(b) Percentage of timeouts.

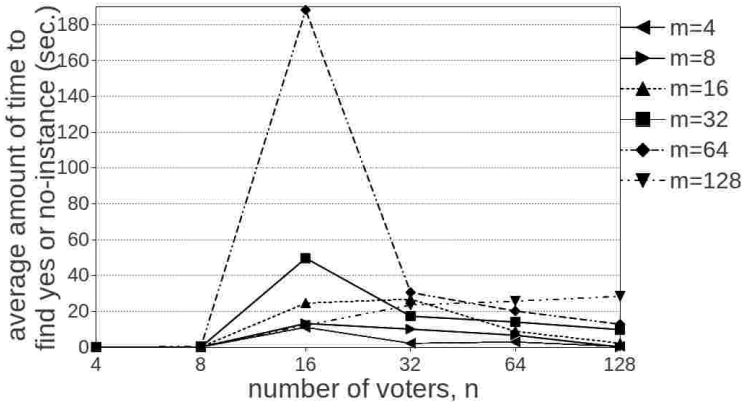

(c) Average time the algorithm needs to give a definite output, instances where timeouts occur are excluded.

Figure 2: Bucklin voting in the IC model for CCDV.


Control By Partition of Voters:

As mentioned in Section 2, control by partition of voters comes in four problem variants, where each case must be investigated separately.

For constructive control by partition of voters in model TP we made the following observations: Similarly to control by deleting or by adding voters, the number of controllable elections increases with the number of voters increasing. This was observed for all three voting systems investigated. We have seen that in at most 13% of the tested plurality elections in the TM model a successful control action can be found. Note that no timeouts occur for up to 32 candidates, so more than 87% of the elections tested are demonstrably not controllable in these cases. For both distribution models, plurality elections produce fewer timeouts than the corresponding fallback or Bucklin elections. This suggests that the control problem for plurality voting is easier to solve on average than for fallback or Bucklin voting. Using the tie-handling model TE instead of TP, in both Bucklin and fallback voting an increase of yes-instances in the constructive cases is evident. By contrast, in the destructive counterparts no significant difference can be observed with respect to the tie-handling rule used.

The most striking results are those obtained for the destructive cases. Here we have that, for all three voting


systems (and both tie-handling models for fallback and Bucklin voting) in the TM model, the average number of controllable elections is very high; and in the IC model, control is almost always possible, see Figure 3.

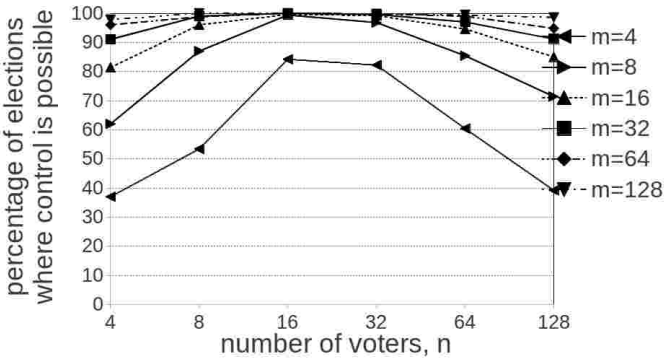

(a) Percentage of yes-instances.

m\n	4	8	16	32	64	128
4	0	0	0	18	40	61
8	0	0	0	3	15	29
16	0	0	0	1	5	15
32	0	0	0	0	3	9
64	0	0	0	0	1	5
128	0	0	0	0	0	1

(b) Percentage of timeouts.

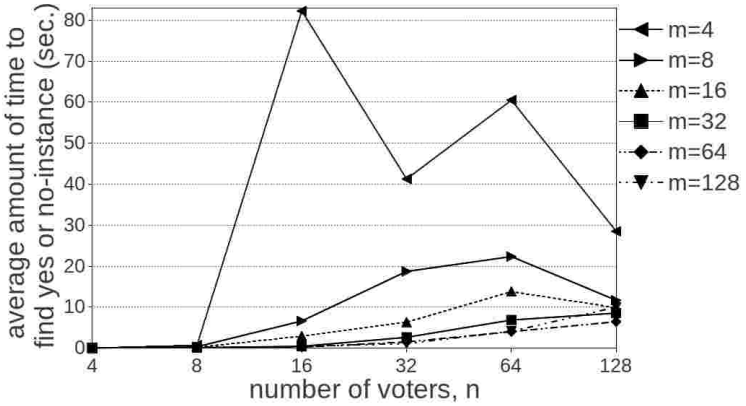

(c) Average time the algorithm needs to give a definite output, instances where timeouts occur are excluded.


Figure 3: Fallback voting in the IC model for DCPV-TP.

In light of the fact that for these cases the resistance proofs of Erdélyi et al. [ER10, EPR11] for fallback and Bucklin voting tend to be the most involved ones (yielding the most complex instances for showing NP-hardness), these results might be surprising at first glance. However, one explanation for the observed results can be found in exactly this fact: The elections constructed in these reductions have a very complex structure which seems to be unlikely to occur in randomly generated elections (at least in elections generated under the distribution models discussed in this paper). Another explanation is that the problems used to reduce from in [ER10, EPR11] tend to be easy to solve for small input sizes, but due to the complexity of the reduction, the resulting elections have many voters/candidates compared to the elections generated for the conducted experiments.

In the destructive cases, the number of timeouts is for all three voting systems the lowest among all control types investigated. In Bucklin elections with uniformly distributed votes and for destructive control by partition of voters in model TP, for only 3.32% of the elections no decision can be made within the time limit. As can be seen in the table, timeouts begin to occur for those elections where the number of voters exceeds 16. But, again, we have to emphasize that these values are very low compared to other types of con-

trol. This explains the plateaus all graphs show. On the one hand, increasing the number of voters increases the number of yes-instances. But on the other hand, for more than 16 voters timeouts begin to diminish the fraction of observed yes-instances. Also, the average running time of the algorithm for those instances where the time limit is not exceeded is rather low, compared to other types of control, see Figure 3c. The highest computational costs occur for those election sizes where the most no-instances were observed. As expected, in the corresponding constructive cases the number of timeouts is significantly higher and so are the average computational costs.


Control By Adding Candidates:

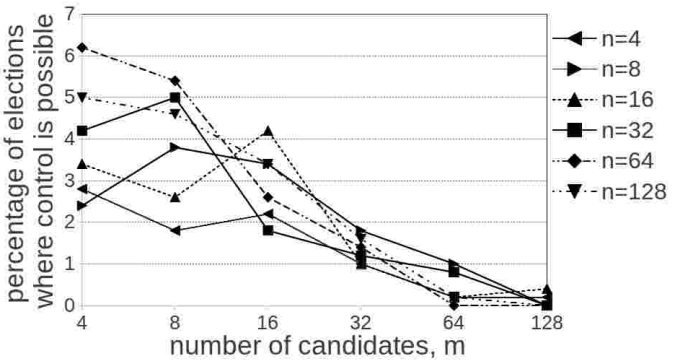

(a) Percentage of yes-instances.

n\m	4	8	16	32	64	128
4	0	0	0	83	81	81
8	0	0	0	93	92	93
16	0	0	0	98	99	98
32	0	0	0	99	99	100
64	0	0	0	99	100	100
128	0	97	98	100	100	100

(b) Percentage of timeouts.

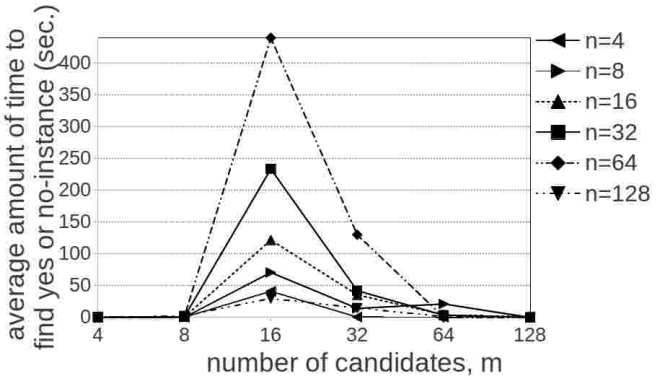

(c) Average time the algorithm needs to give a definite output, instances where timeouts occur are excluded.

Figure 4: Fallback voting in the TM model for CCAC.

So far, the results for constructive control by adding candidates show the highest number of timeouts. For those election sizes where no timeouts occur (i.e., where the determination of yes- or no-instances is successful), we have that not many elections can be controlled successfully in either of the two voting systems. In Figure 4, we see the results for fallback voting in the TM model, exemplifying in Figure 4a the low number of yes-instances for this type of control. For example, in the "max" column in Table 2, the highest percentage of controllable fallback elections is 11% in the IC model and only 7% in the TM model. Plurality voting

shows similar results as fallback voting with at most 20% yes-instances in the IC model and less than 4% in the TM model.

Figure 4b gives the detailed occurrence of timeouts for the different election sizes and Figure 4c shows the average time needed to determine whether a given fallback election generated under the TM model can be controlled by adding candidates or not. Remember that in the latter figure the average values do not consider those elections where the algorithm exceeded the time limit of 600 seconds. Together with the timeout table we can see in Figure 4a that in elections with up to 16 candidates the number of non-controllable elections is very high and increases with the number of candidates increasing. When more than 16 candidates participate in an election the number of no-instances diminishes as drastically as the timeout rate grows. Looking at the computational costs in Figure 4c we can see this in the peaks for $m = 16$. Since by design our algorithm needs generally more time to determine that an instance is a no-instance than finding a yes-instance, the high number of no-instances for 16 candidates inflates the average computing time. Knowing that the average computing time for finding yes-instances is not particularly high for this type of control (see Figure 12 in the appendix) we might conjecture that for the bigger election sizes the instances where no distinction could be made by our algorithm are no-instances rather than yes-instances. This indicates that this control type presumably has the lowest overall number of yes-instances. Thus, even for small election sizes, this type of control seems to be hard to exert succesfully.

Turning now to the destructive variant of control by adding candidates, for Bucklin elections generated with the IC model, 71% is a lower bound for the number of controllable elections. For up to 16 candidates, a successful control action can be found in nearly all elections. The results for the TM model reconfirm the observation made before, namely that the tendencies in both models are similar, but with at most 77% and at least 42% of controllable elections the overall numbers are again lower than in the IC model. The latter results hold for fallback elections generated in the TM model as well, whereas in the IC model at least 53% and no more than 92% of the fallback elections are controllable. In the tested plurality elections generated with the IC model, similarly to Bucklin voting, more than 70% and nearly up to 100% are controllable. In the TM model, roughly between 50% and 60% of yes-instances are found for those election sizes where no timeouts occur, so between 40% and 50% of these plurality elections are not controllable. In this control scenario, for about 46% of the elections no definite output is given in the constructive case, whereas in only about 8% of the elections timeouts occur in the destructive case.

6. Discussion and Conclusions

We have empirically studied the complexity of NP-hard control problems for plurality, fallback, and Bucklin voting in the most important of the common control scenarios. This is the first such study for control problems in voting and complements the corresponding results [Wal10, Wal09, DKNW10, DKNW11, NWX11, CT07] for manipulating elections. In general, our findings indicate that control can often be exerted effectively in practice, despite the NP-hardness of the corresponding problems. Our experiments also allow a more fine-grained analysis and comparison—across various control scenarios, vote distribution models, and voting systems—than merely stating NP-hardness for all these problems. Tables 2 and 3 give an overview of our experimental results. A detailed analysis and discussion follows here, and a comprehensive presentation of all experimental data and results can be found in the appendix.

IC versus TM:

Comparing the results for the different distribution models, we see that in every voting system for all control types studied (except fallback voting in constructive control by deleting candidates) the overall number of yes-instances is higher in the IC than in the TM model. This may result from the fact that in elections with uniformly distributed votes, all candidates are likely to be approximately equally preferred by the voters. So both constructive and destructive control actions are easier to find. This also explains the observation that the IC model mostly produces fewer timeouts.

Constructive versus Destructive Control:

For all investigated types of control where both constructive and destructive control was investigated, we found that the destructive control types are experimentally much easier than their constructive counterparts, culminating in almost 100% of controllable elections for certain control types in the IC model. These findings confirm—and strengthen—the theoretical insight of Hemaspaandra et al. [HHR07] that the destructive control problems disjunctively truth-table-reduce to their constructive counterparts and thus are never harder to solve, up to a polynomial factor (see also the corresponding observation of Conitzer et al. [CSL07] regarding manipulation): In fact, destructive control tends to be even much easier than constructive control.

Comparison Across Voting Systems:

For constructive control, we have seen that fallback and Bucklin voting show similar tendencies and numbers of yes-instances, especially regarding voter control. We also observed that their constructive voter control problems are in general harder to solve than those for plurality voting. In all three voting systems, constructive control by adding candidates seems to be one of the hardest control problems showing the smallest numbers of yes-instances in the TM model. Only for the constructive partition-of-candidates cases higher numbers of timeouts were observed.

Adding Candidates versus Deleting Candidates:

Comparing control by adding candidates to control by deleting candidates in the constructive case we observed that the number of yes-instances for control by deleting candidates is significantly higher. These findings are perhaps not overly surprising, since in the voting systems considered here adding candidates to an election can only worsen the position of the designated candidate in the votes. That is, constructive control can be exerted successfully only if by adding candidates rivals of the designated candidate lose enough points so as to get defeated by him or her. This, in turn, can happen only if the designated candidate was already a highly preferred candidate in the original election.

Voter Control versus Candidate Control:

For fallback and Bucklin voting, we can also compare constructive candidate and voter control directly. In both voting systems and both distribution models, the number of yes-instances for constructive control by adding voters is around four times higher than the number of yes-instances in the corresponding candidate control type, which confirms the argument above, saying that adding candidates cannot push the designated candidate directly. Constructive control by deleting voters can be successfully exerted more frequently when votes are less correlated, whereas the proportion of successful control actions for deleting candidates is about the same for both considered distribution models. The observed differences between these types of voter and candidate control may result from the fact that adding or deleting candidates only shifts the position of the designated candidate, which may not influence the outcome of the election as directly as increasing or decreasing the candidates' scores by adding or deleting voters does. This explains why voter control can be tackled more easily than candidate control by greedy approaches such as ours.

Concluding Remarks:

Just as Walsh [Wal09, Wal10] observes for manipulation in the veto rule and in STV, for all types of control investigated in our experiments, the curves do not show the typical phase transition known for "really hard" computational problems such as the satisfiability problem (see [GW95, CKT91] for a detailed discussion of this issue).

These observations raise the question of how other distribution models influence the outcome of such experiments. Furthermore, the algorithms implemented could be improved in terms of considering a higher

number of elections per data point, increasing the election sizes, or allowing a higher number of voters or candidates to be deleted or added in the corresponding control scenarios. Besides this, other voting systems can be analyzed since only their winner determination has to be implemented in addition to a few minor adjustments such as trivial-case checks for the investigated control scenarios tailored to the voting system at hand.

Acknowledgments:

We thank Toby Walsh for interesting discussions, Volker Aurich for giving us access to his computer lab, and Guido Königstein for his help in setting up our experiments.

References

[Ber85] S. Berg. Paradox of voting under an urn model: The effect of homogeneity. *Public Choice*, 47(2):377–387, 1985.

[BF83] S. Brams and P. Fishburn. *Approval Voting*. Birkhäuser, Boston, 1983.

[BS09] S. Brams and R. Sanver. Voting systems that combine approval and preference. In S. Brams, W. Gehrlein, and F. Roberts, editors, *The Mathematics of Preference, Choice, and Order: Essays in Honor of Peter C. Fishburn*, pages 215–237. Springer, 2009.

[BTT92] J. Bartholdi, III, C. Tovey, and M. Trick. How hard is it to control an election? *Mathematical and Computer Modelling*, 16(8/9):27–40, 1992.

[CKT91] P. Cheeseman, B. Kanefsky, and W. Taylor. Where the really hard problems are. In *Proceedings of the 13th International Joint Conference on Artificial Intelligence*, pages 331–337. Morgan Kaufmann, 1991.

[CSL07] V. Conitzer, T. Sandholm, and J. Lang. When are elections with few candidates hard to manipulate? *Journal of the ACM*, 54(3):Article 14, 2007.

[CT07] T. Coleman and V. Teague. On the complexity of manipulating elections. In *Proceedings of Computing: the 13th Australasian Theory Symposium*, volume 65, pages 25–33, 2007.

[DKNW10] J. Davies, G. Katsirelos, N. Narodystka, and T. Walsh. An empirical study of Borda manipulation. In V. Conitzer and J. Rothe, editors, *Proceedings of the 3rd International Workshop on Computational Social Choice*, pages 91–102. Universität Düsseldorf, September 2010.

[DKNW11] J. Davies, G. Katsirelos, N. Narodytska, and T. Walsh. Complexity of and algorithms for Borda manipulation. In *Proceedings of the 25th AAAI Conference on Artificial Intelligence*, pages 657–662. AAAI Press, August 2011.

[EF10] G. Erdélyi and M. Fellows. Parameterized control complexity in Bucklin voting and in fallback voting. In V. Conitzer and J. Rothe, editors, *Proceedings of the 3rd International Workshop on Computational Social Choice*, pages 163–174. Universität Düsseldorf, September 2010.

[EFPR11] G. Erdélyi, M. Fellows, L. Piras, and J. Rothe. Control complexity in Bucklin and fallback voting. Technical Report arXiv:1103.2230v1 [cs.CC], Computing Research Repository, arXiv.org/corr/, March 2011.

[EPR11] G. Erdélyi, L. Piras, and J. Rothe. The complexity of voter partition in Bucklin and fallback voting: Solving three open problems. In *Proceedings of the 10th International Joint Conference on Autonomous Agents and Multiagent Systems*, pages 837–844. IFAAMAS, May 2011.

[ER10] G. Erdélyi and J. Rothe. Control complexity in fallback voting. In *Proceedings of Computing: the 16th Australasian Theory Symposium*, pages 39–48. Australian Computer Society *Conferences in Research and Practice in Information Technology Series*, vol. 32, no. 8, January 2010.

[FHH10] P. Faliszewski, E. Hemaspaandra, and L. Hemaspaandra. Using complexity to protect elections. *Communications of the ACM*, 53(11):74–82, 2010.

[FHHR11] P. Faliszewski, E. Hemaspaandra, L. Hemaspaandra, and J. Rothe. The shield that never was: Societies with single-peaked preferences are more open to manipulation and control. *Information and Computation*, 209(2):89–107, 2011.

[FP10] P. Faliszewski and A. Procaccia. AI's war on manipulation: Are we winning? *AI Magazine*, 31(4):53–64, 2010.

[GW95] I. Gent and T. Walsh. Phase transitions from real computational problems. In *Proceedings of the 8th International Symposium on Artificial Intelligence*, pages 356–364, 1995.

[HH26] C. Hoag and G. Hallett. *Proportional Representation*. Macmillan, 1926.

[HHR07] E. Hemaspaandra, L. Hemaspaandra, and J. Rothe. Anyone but him: The complexity of precluding an alternative. *Artificial Intelligence*, 171(5–6):255–285, 2007.

[Men12] C. Menton. Normalized range voting broadly resists control. Technical Report arXiv:1005.5698 [cs.GT], Computing Research Repository, arXiv.org/corr/, June 2012.

[NWX11] N. Narodytska, T. Walsh, and L. Xia. Manipulation of Nanson's and Baldwin's rules. In *Proceedings of the 25th AAAI Conference on Artificial Intelligence*, pages 713–718. AAAI Press, August 2011.

[Wal09] T. Walsh. Where are the really hard manipulation problems? The phase transition in manipulating the veto rule. In *Proceedings of the 21st International Joint Conference on Artificial Intelligence*, pages 324–329. IJCAI, July 2009.

[Wal10] T. Walsh. An empirical study of the manipulability of single transferable voting. In *Proceedings of the 19th European Conference on Artificial Intelligence*, pages 257–262. IOS Press, August 2010.

[ZPR09] M. Zuckerman, A. Procaccia, and J. Rosenschein. Algorithms for the coalitional manipulation problem. *Artificial Intelligence*, 173(2):392–412, 2009.

A. Fallback Voting

A.1. Constructive Control by Adding Candidates

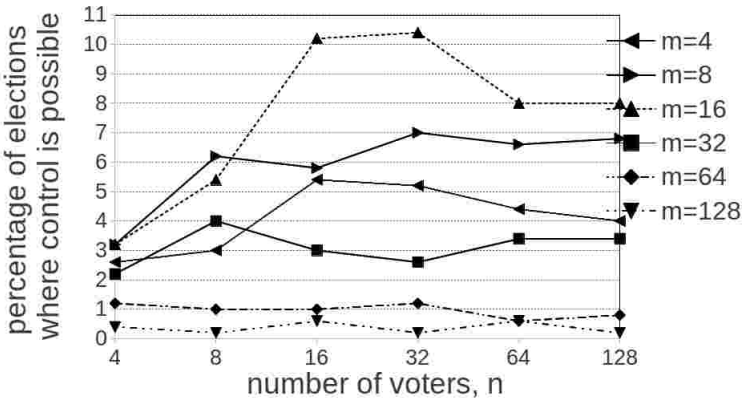


Figure 5: Results for fallback voting in the IC model for constructive control by adding candidates. Number of candidates is fixed.

	$m=4$						$m=8$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	13	15	270	26	22	20	16	31	29	35	33	34
# ci	487	485	473	474	478	480	484	469	471	465	467	466
# to	0	0	0	0	0	0	0	0	0	0	0	0
	$m=16$						$m=32$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	16	27	51	52	40	40	11	20	15	13	17	17
# ci	484	473	449	448	460	0	36	3	0	0	0	0
# to	0	0	0	0	0	460	453	477	485	487	483	483
	$m=64$						$m=128$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	6	5	5	6	3	4	2	1	3	1	3	1
# ci	28	0	0	0	0	0	26	3	0	0	0	0
# to	466	495	495	494	497	496	472	497	497	499	497	499

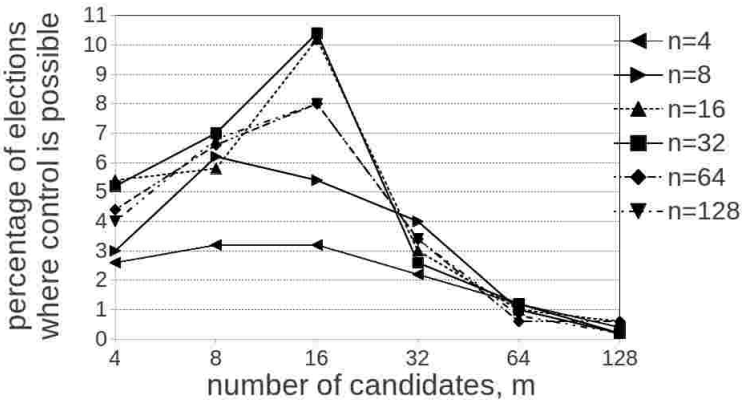


Figure 6: Results for fallback voting in the IC model for constructive control by adding candidates. Number of voters is fixed.

	$n=4$						$n=8$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	13	16	16	11	6	2	15	31	27	20	5	1
# ci	487	484	484	36	28	26	485	469	473	3	0	3
# to	0	0	0	453	466	472	0	0	0	477	495	496
	$n=16$						$n=32$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	27	29	51	15	5	3	26	35	52	13	6	1
# ci	473	471	449	0	0	0	474	465	448	0	0	0
# to	0	0	0	485	495	497	0	0	0	487	494	499
	$n=64$						$n=128$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	22	33	40	17	3	3	20	34	40	17	4	1
# ci	478	467	460	0	0	0	480	466	0	0	0	0
# to	0	0	0	483	497	497	0	0	460	483	496	499

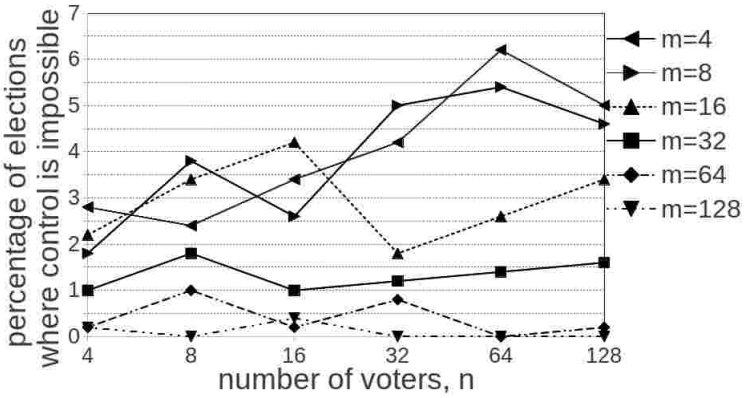


Figure 7: Results for fallback voting in the TM model for constructive control by adding candidates. Number of candidates is fixed.

	$m=4$						$m=8$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	14	12	17	21	31	25	9	19	13	25	27	23
# ci	486	488	483	479	469	475	491	481	487	475	473	477
# to	0	0	0	0	0	0	0	0	0	0	0	0
	$m=16$						$m=32$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	11	17	21	9	13	17	5	9	5	6	7	8
# ci	489	483	479	491	487	0	82	26	6	0	0	0
# to	0	0	0	0	0	483	413	465	489	494	493	492
	$m=64$						$m=128$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	1	5	1	4	0	1	1	0	2	0	0	0
# ci	92	33	5	0	0	0	95	36	10	0	0	0
# to	407	462	494	496	500	499	404	464	488	500	500	500

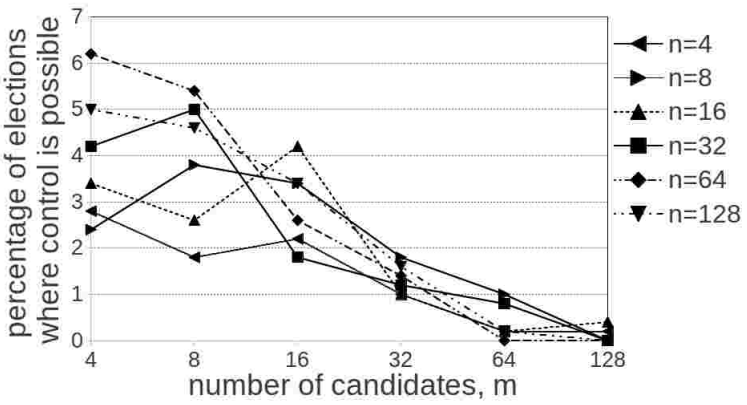


Figure 8: Results for fallback voting in the TM model for constructive control by adding candidates. Number of voters is fixed.

	$n=4$						$n=8$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	14	9	11	5	1	1	12	19	17	9	5	0
# ci	486	491	489	82	92	95	488	481	483	26	33	36
# to	0	0	0	413	407	404	0	0	0	465	462	464
	$n=16$						$n=32$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	17	13	21	5	1	2	21	25	9	6	4	0
# ci	483	487	479	6	5	10	479	475	491	0	0	0
# to	0	0	0	489	494	488	0	0	0	494	496	500
	$n=64$						$n=128$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	31	27	13	7	0	0	25	23	17	8	1	0
# ci	469	473	487	0	0	0	475	477	0	0	0	0
# to	0	0	0	493	500	500	0	0	483	492	499	500

A.1.1. Computation Costs

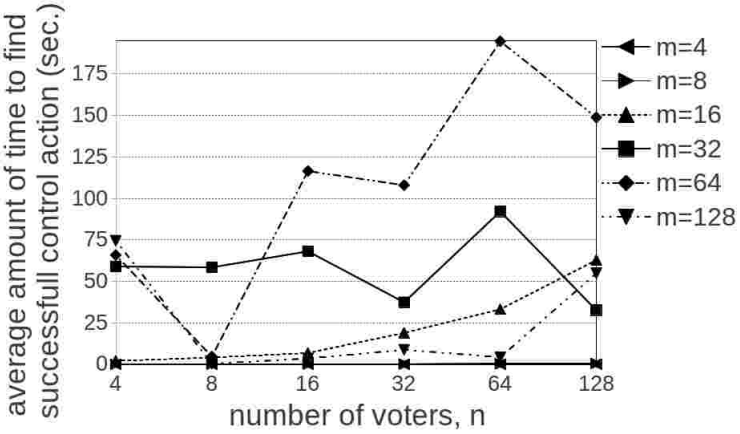


Figure 9: Average time the algorithm needs to find a successful control action for constructive control by adding candidates in fallback elections in the IC model. The maximum is 194,7 seconds.

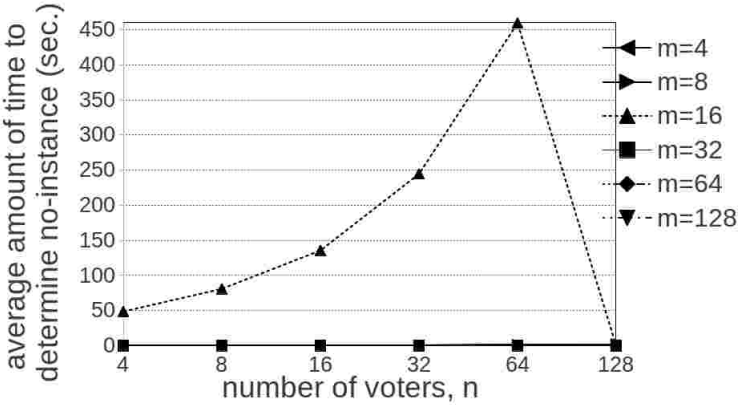


Figure 10: Average time the algorithm needs to determine no-instance of constructive control by adding candidates in fallback elections in the IC model. The maximum is 459,54 seconds.

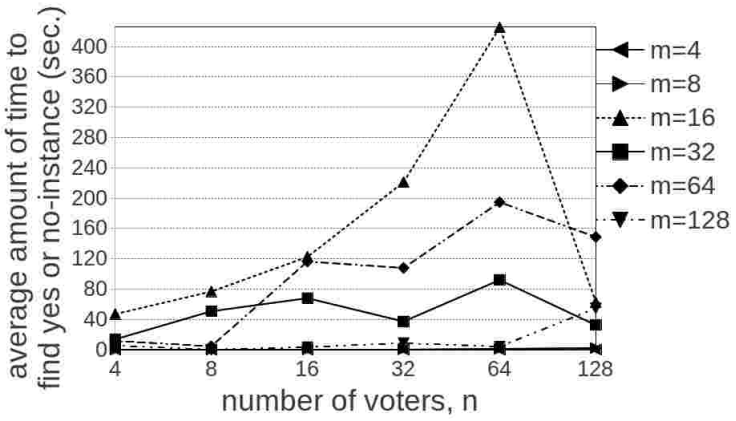


Figure 11: Average time the algorithm needs to give a definite output for constructive control by adding candidates in fallback elections in the IC model. The maximum is $425,43$ seconds.

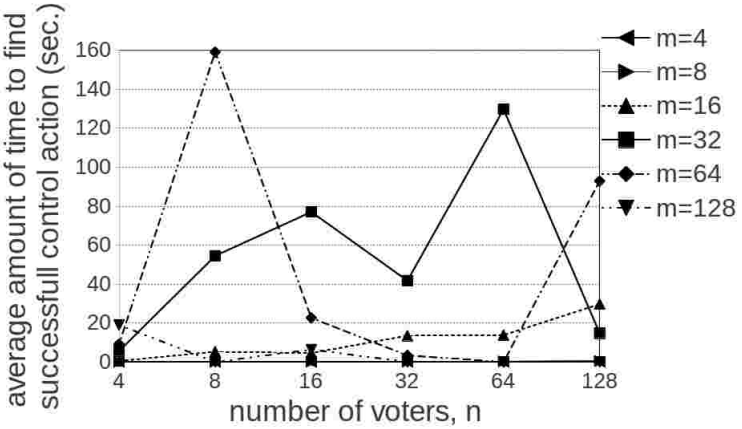


Figure 12: Average time the algorithm needs to find a successful control action for constructive control by adding candidates in fallback elections in the TM model. The maximum is $159,22$ seconds.

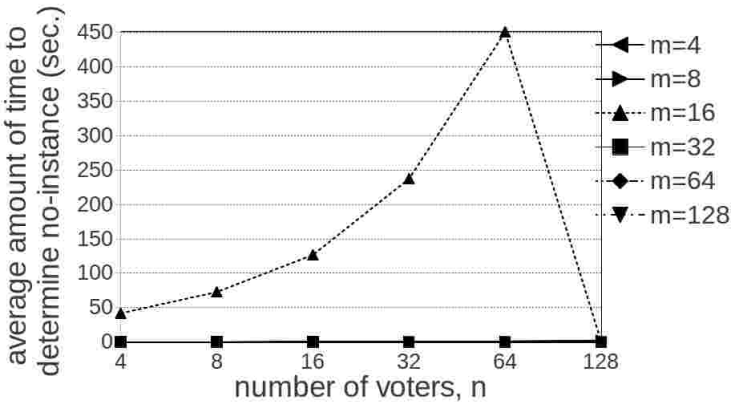


Figure 13: Average time the algorithm needs to determine no-instance of constructive control by adding candidates in fallback elections in the TM model. The maximum is 451,05 seconds.

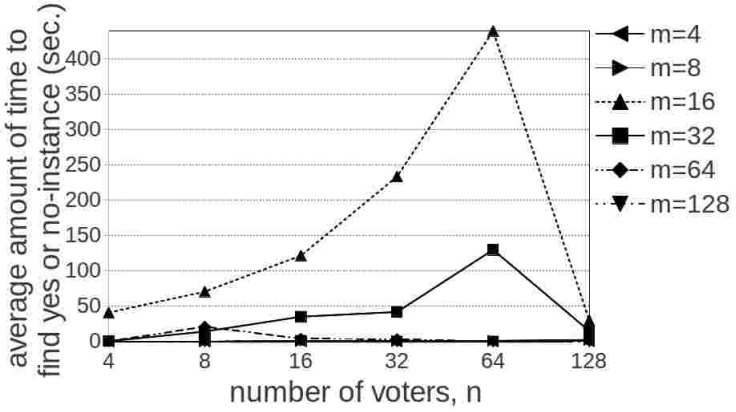


Figure 14: Average time the algorithm needs to give a definite output for constructive control by adding candidates in fallback elections in the TM model. The maximum is 439,68 seconds.

A.2. Destructive Control by Adding Candidates

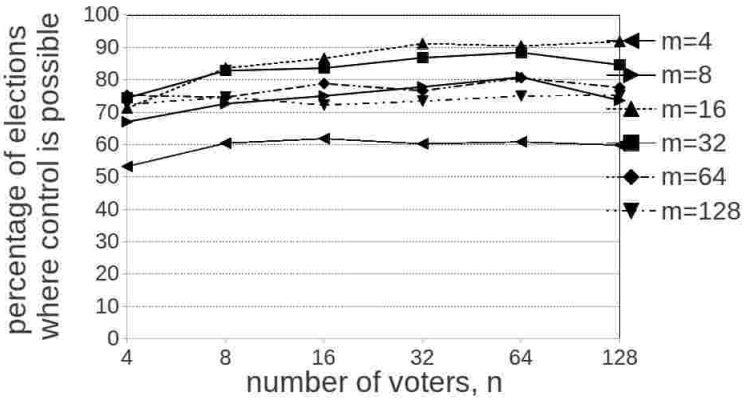


Figure 15: Results for fallback voting in the IC model for destructive control by adding candidates. Number of candidates is fixed.

	$m=4$						$m=8$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	266	302	309	301	304	299	335	363	375	389	404	368
# ci	234	198	191	199	196	201	165	137	125	111	96	132
# to	0	0	0	0	0	0	0	0	0	0	0	0
	$m=16$						$m=32$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	356	418	433	456	452	459	372	414	418	434	442	423
# ci	144	82	67	44	48	0	0	0	0	0	0	0
# to	0	0	0	0	0	41	128	86	82	66	58	77
	$m=64$						$m=128$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	376	373	394	383	403	388	362	373	361	367	375	376
# ci	0	0	0	0	0	0	0	0	0	0	0	0
# to	124	127	106	117	97	112	138	127	139	133	125	124

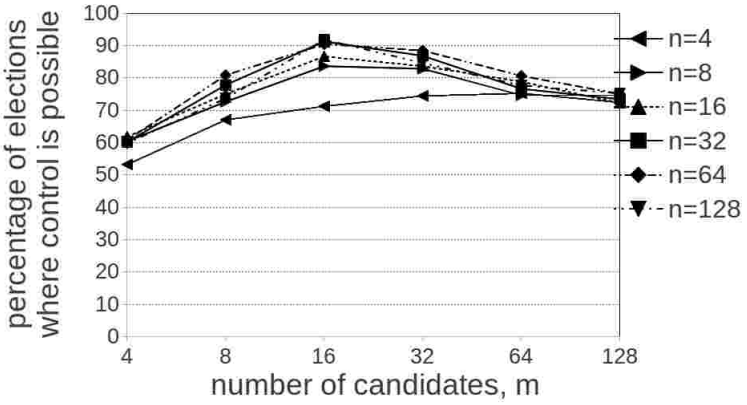


Figure 16: Results for fallback voting in the IC model for destructive control by adding candidates. Number of voters is fixed.

	$n=4$						$n=8$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	266	335	356	372	376	362	302	363	418	414	373	373
# ci	234	165	144	0	0	0	198	137	82	0	0	0
# to	0	0	0	128	124	138	0	0	0	86	127	127
	$n=16$						$n=32$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	309	375	433	418	394	361	301	389	456	434	383	367
# ci	191	125	67	0	0	0	199	111	44	0	0	0
# to	0	0	0	82	106	139	0	0	0	66	117	133
	$n=64$						$n=128$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	304	404	452	442	403	375	299	368	459	423	388	376
# ci	196	96	48	0	0	0	201	132	0	0	0	0
# to	0	0	0	58	97	125	0	0	41	77	112	124

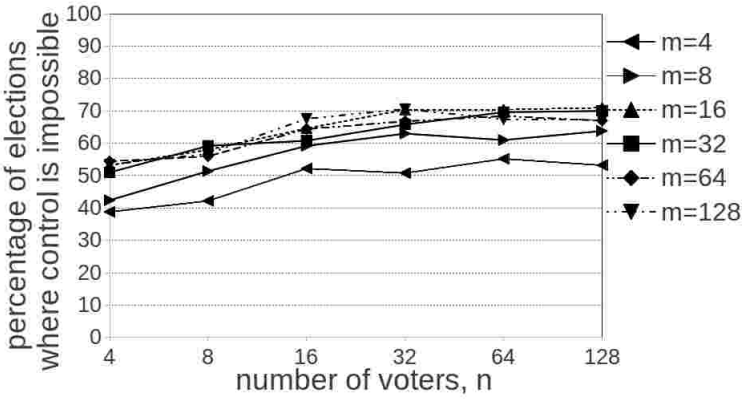


Figure 17: Results for fallback voting in the TM model for destructive control by adding candidates. Number of candidates is fixed.

	$m=4$						$m=8$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	194	211	261	254	276	266	212	257	296	315	305	319
# ci	306	289	239	246	224	234	288	243	204	185	195	181
# to	0	0	0	0	0	0	0	0	0	0	0	0
	$m=16$						$m=32$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	266	290	323	352	352	355	255	296	304	329	348	350
# ci	234	210	177	148	148	13	123	99	62	27	5	7
# to	0	0	0	0	0	132	122	105	134	144	147	143
	$m=64$						$m=128$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	272	280	322	334	342	335	267	284	338	353	337	336
# ci	118	108	58	19	4	6	135	105	58	20	6	0
# to	110	112	120	147	154	159	98	111	104	127	157	164

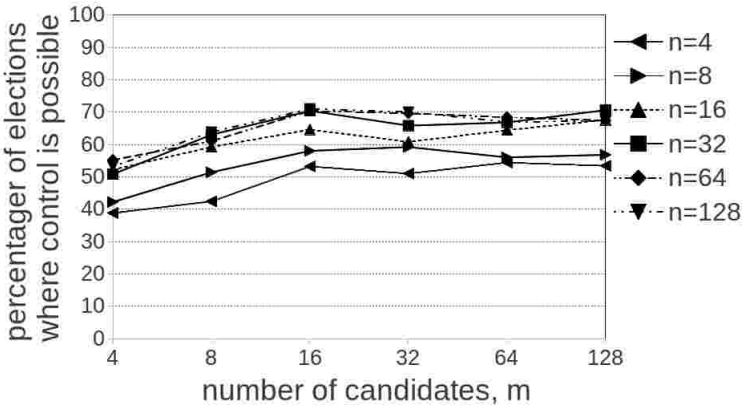


Figure 18: Results for fallback voting in the TM model for destructive control by adding candidates. Number of voters is fixed.

	$n=4$						$n=8$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	194	212	266	255	272	267	211	257	290	296	280	284
# ci	306	288	234	123	118	135	289	243	210	99	108	105
# to	0	0	0	122	110	98	0	0	0	105	112	111
	$n=16$						$n=32$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	261	296	323	304	322	338	254	315	352	329	334	353
# ci	239	204	177	62	58	58	246	185	148	27	19	20
# to	0	0	0	134	120	104	0	0	0	144	147	127
	$n=64$						$n=128$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	276	305	352	348	342	337	266	319	355	350	335	336
# ci	224	195	148	5	4	6	234	181	13	7	6	0
# to	0	0	0	147	154	157	0	0	132	143	159	164

A.2.1. Computational Costs

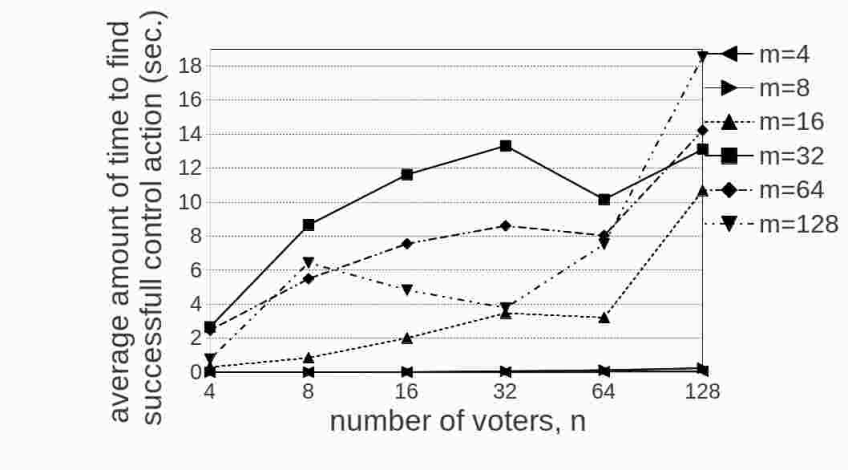


Figure 19: Average time the algorithm needs to find a successful control action for destructive control by adding candidates in fallback elections in the IC model. The maximum is $18,53$ seconds.

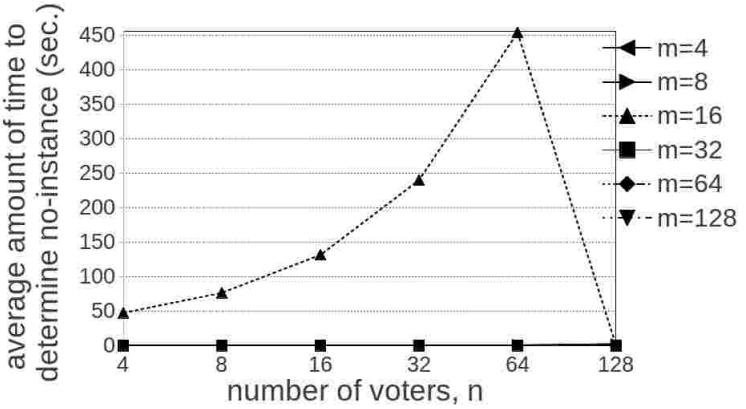


Figure 20: Average time the algorithm needs to determine no-instance of destructive control by adding candidates in fallback elections in the IC model. The maximum is $453,8$ seconds.

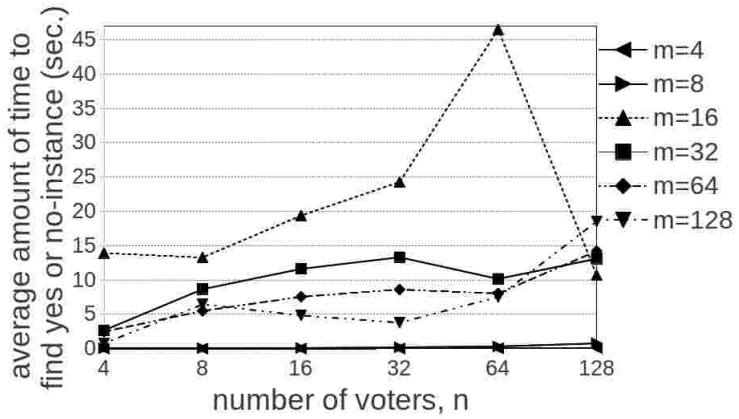


Figure 21: Average time the algorithm needs to give a definite output for destructive control by adding candidates in fallback elections in the IC model. The maximum is $46,48$ seconds.

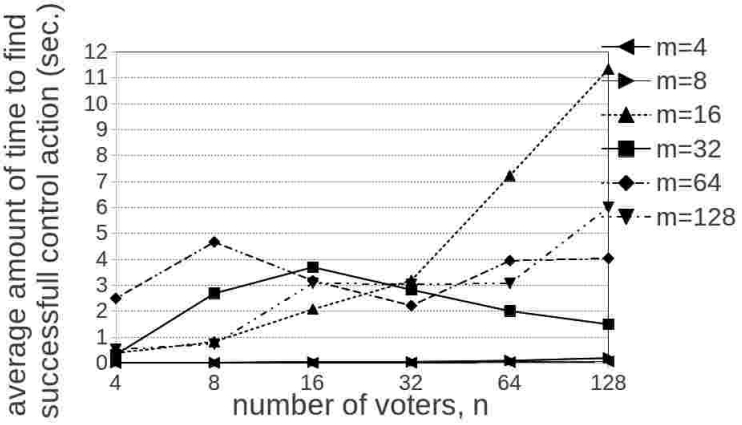


Figure 22: Average time the algorithm needs to find a successful control action for destructive control by adding candidates in fallback elections in the TM model. The maximum is $11,33$ seconds.

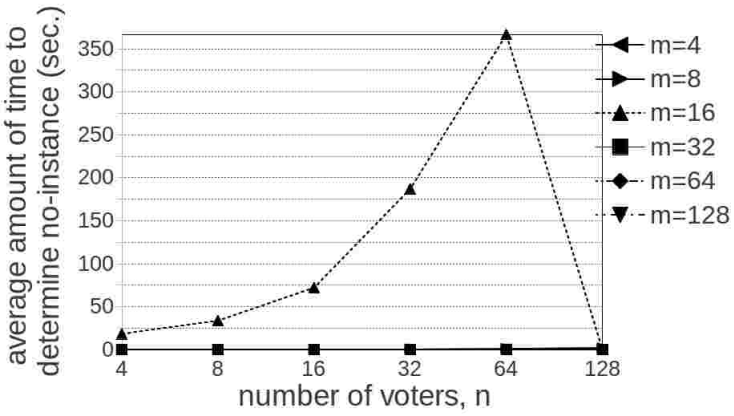


Figure 23: Average time the algorithm needs to determine no-instance of destructive control by adding candidates in fallback elections in the TM model. The maximum is 366,67 seconds.

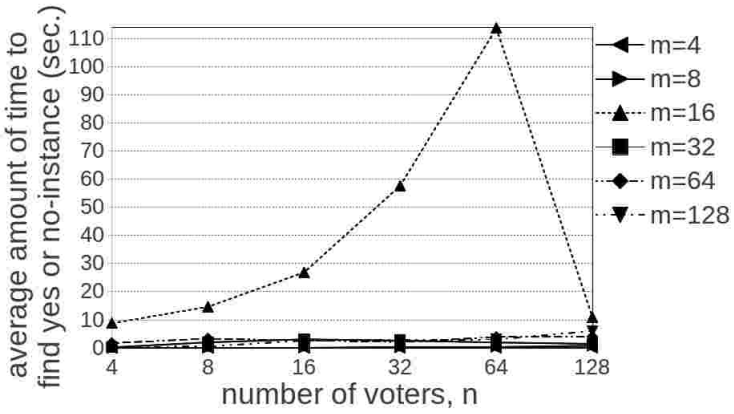


Figure 24: Average time the algorithm needs to give a definite output for destructive control by adding candidates in fallback elections in the TM model. The maximum is 113,63 seconds.

A.3. Constructive Control by Deleting Candidates

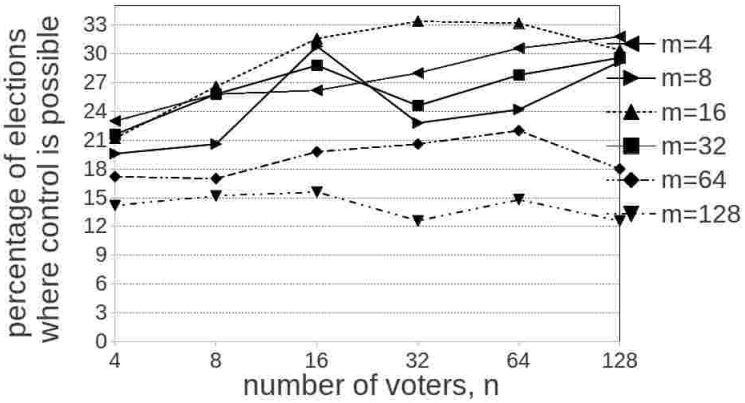


Figure 25: Results for fallback voting in the IC model for constructive control by deleting candidates. Number of candidates is fixed.

	$m=4$						$m=8$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	115	129	131	140	153	159	98	103	154	114	121	146
# ci	385	371	369	360	347	341	402	397	346	386	379	354
# to	0	0	0	0	0	0	0	0	0	0	0	0
	$m=16$						$m=32$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	106	133	158	167	166	152	109	129	144	123	139	148
# ci	394	367	342	333	334	348	33	2	0	0	0	0
# to	0	0	0	0	0	0	358	369	356	377	361	352
	$m=64$						$m=128$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	86	85	99	103	110	90	71	76	78	63	74	63
# ci	29	1	0	0	0	0	0	28	30	23	0	0
# to	385	414	401	397	390	410	429	396	392	414	426	437

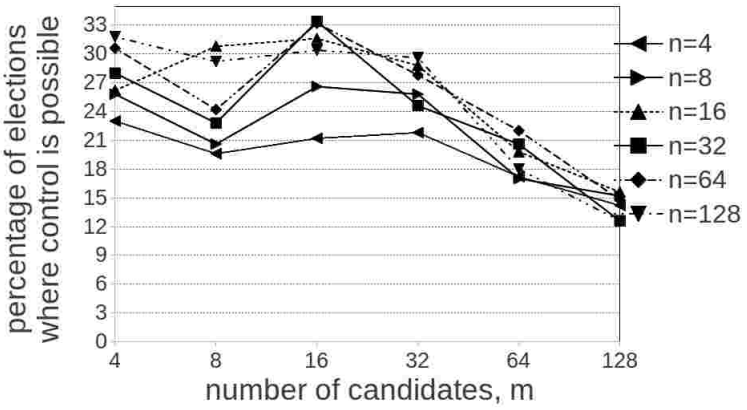


Figure 26: Results for fallback voting in the IC model for constructive control by deleting candidates. Number of voters is fixed.

	$n=4$						$n=8$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	115	98	106	109	86	71	129	103	133	129	85	76
# ci	385	402	394	33	29	0	371	397	367	2	1	28
# to	0	0	0	358	385	429	0	0	0	369	414	396
	$n=16$						$n=32$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	131	154	158	144	99	78	140	114	167	123	103	63
# ci	369	346	342	0	0	30	360	386	333	0	0	23
# to	0	0	0	356	401	392	0	0	0	377	397	414
	$n=64$						$n=128$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	153	121	166	139	110	74	159	146	152	148	90	63
# ci	347	379	334	0	0	0	341	354	348	0	0	0
# to	0	0	0	361	390	426	0	0	0	352	410	437

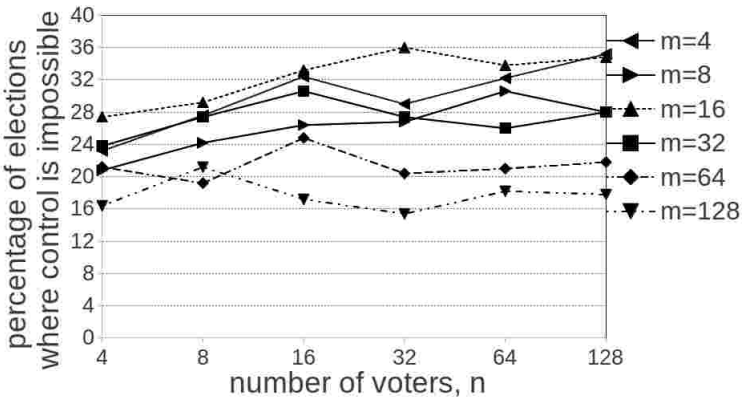


Figure 27: Results for fallback voting in the TM model for constructive control by deleting candidates. Number of candidates is fixed.

	$m=4$						$m=8$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	116	138	162	145	161	176	104	132	134	134	153	140
# ci	384	362	338	355	339	324	396	368	366	347	347	360
# to	0	0	0	0	0	0	0	0	0	0	0	0
	$m=16$						$m=32$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	137	146	166	180	169	174	119	137	153	137	130	140
# ci	363	354	334	320	331	326	66	29	0	0	0	0
# to	0	0	0	0	0	0	315	334	347	363	370	360
	$m=64$						$m=128$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	106	96	124	102	105	109	82	106	86	77	91	89
# ci	76	33	10	0	0	0	77	0	0	0	0	0
# to	318	371	366	398	395	391	341	394	414	423	409	411

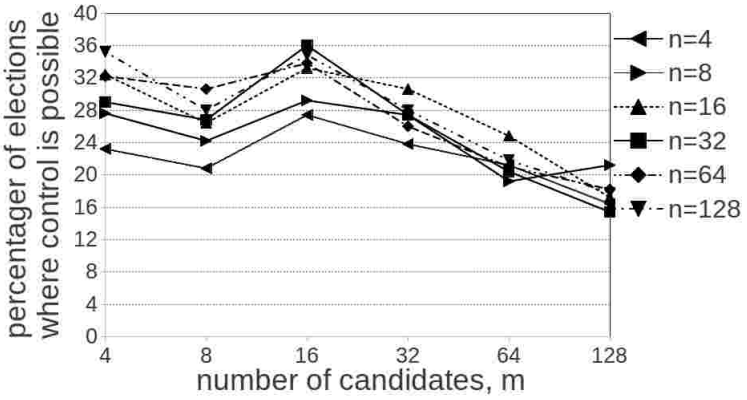


Figure 28: Results for fallback voting in the TM model for constructive control by deleting candidates. Number of voters is fixed.

	$n=4$						$n=8$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	116	104	137	119	106	82	138	121	146	137	96	106
# ci	384	396	363	66	76	77	362	379	354	29	33	0
# to	0	0	0	315	318	341	0	0	0	334	371	394
	$n=16$						$n=32$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	162	132	166	153	124	86	145	134	180	137	102	77
# ci	338	368	334	0	0	0	355	366	320	0	0	0
# to	0	0	0	347	366	414	0	0	0	363	398	423
	$n=64$						$n=128$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	161	153	169	130	105	91	176	140	174	140	109	89
# ci	339	347	331	0	0	0	324	360	326	0	0	0
# to	0	0	0	370	395	409	0	0	0	360	391	411

A.3.1. Computation Costs

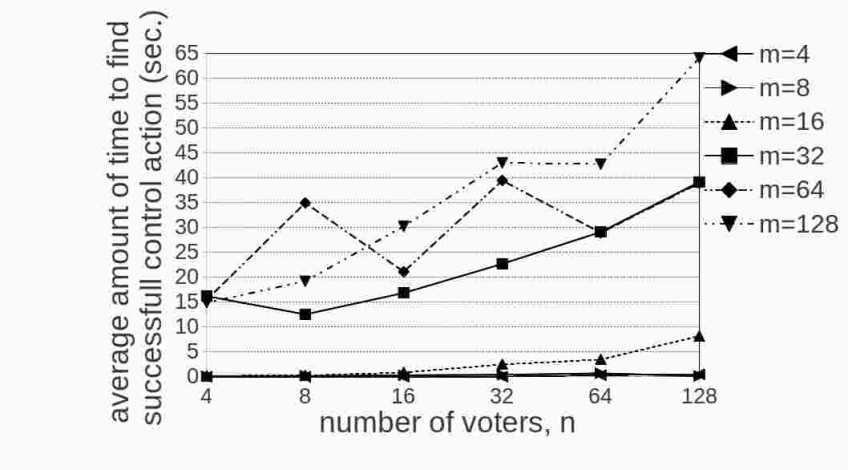


Figure 29: Average time the algorithm needs to find a successful control action for constructive control by deleting candidates in fallback elections in the IC model. The maximum is 64,05 seconds.

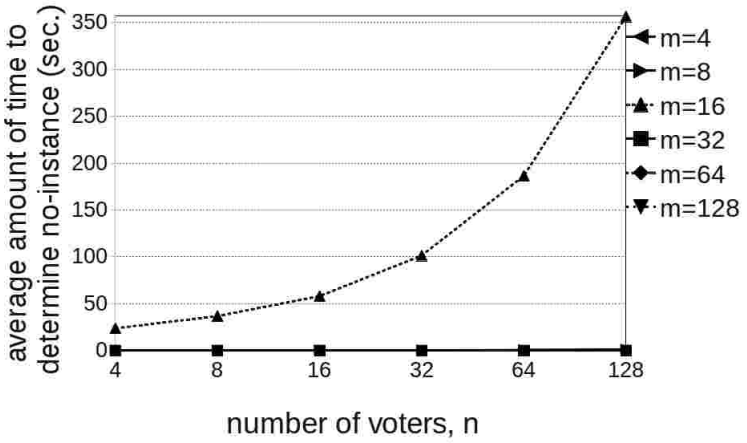


Figure 30: Average time the algorithm needs to determine no-instance of constructive control by deleting candidates in fallback elections in the IC model. The maximum is 356,18 seconds.

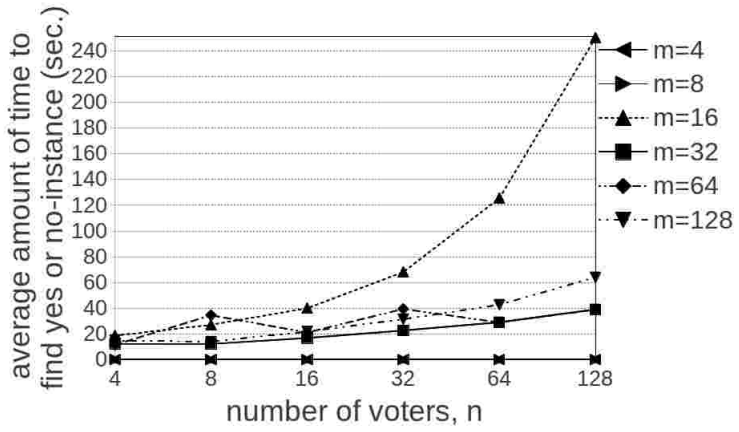


Figure 31: Average time the algorithm needs to give a definite output for constructive control by deleting candidates in fallback elections in the IC model. The maximum is 250,39 seconds.

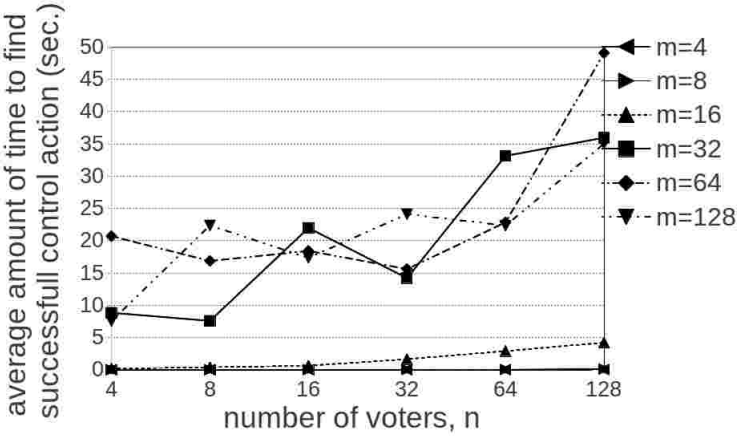


Figure 32: Average time the algorithm needs to find a successful control action for constructive control by deleting candidates in fallback elections in the TM model. The maximum is 49,05 seconds.

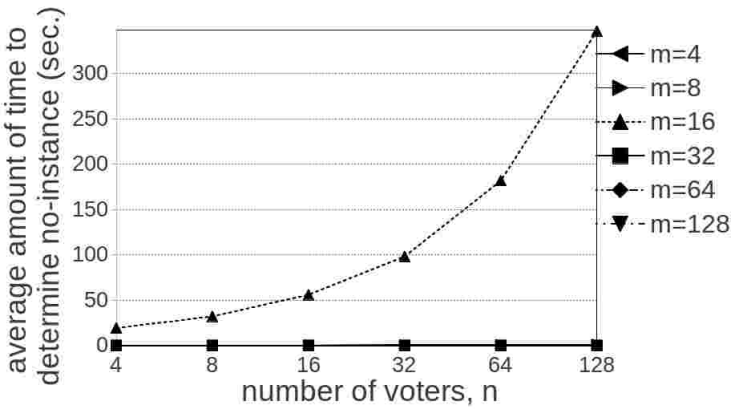


Figure 33: Average time the algorithm needs to determine no-instance of constructive control by deleting candidates in fallback elections in the TM model. The maximum is 347,06 seconds.

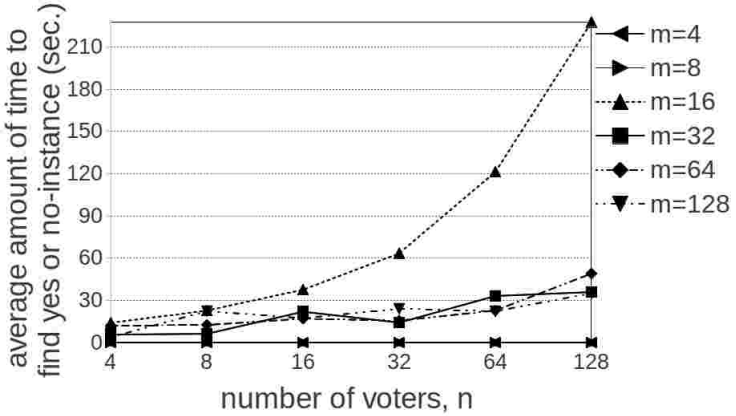


Figure 34: Average time the algorithm needs to give a definite output for constructive control by deleting candidates in fallback elections in the TM model. The maximum is 227,76 seconds.

A.4. Destructive Control by Deleting Candidates

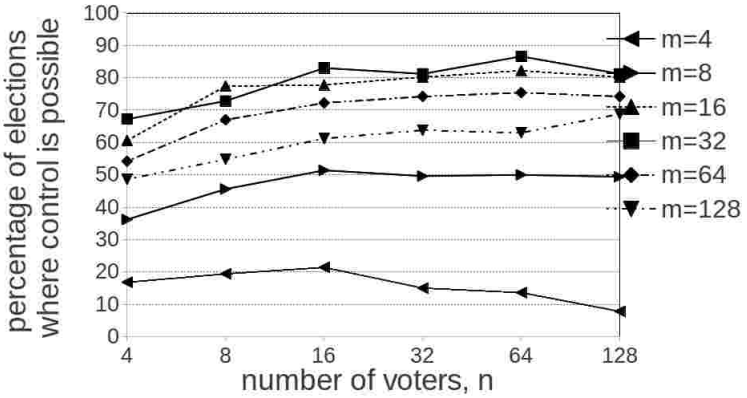


Figure 35: Results for fallback voting in the IC model for destructive control by deleting candidates. Number of candidates is fixed.

	$m=4$						$m=8$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	84	97	107	75	68	39	181	228	257	248	250	247
# ci	416	403	393	425	432	461	319	272	243	252	250	253
# to	0	0	0	0	0	0	0	0	0	0	0	0
	$m=16$						$m=32$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	303	387	389	99	411	401	336	364	415	406	433	406
# ci	197	113	111	99	89	99	1	0	0	0	0	0
# to	0	0	0	0	0	0	163	136	85	94	67	94
	$m=64$						$m=128$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	271	335	361	371	377	371	243	274	306	319	315	344
# ci	0	0	0	0	0	0	0	0	0	0	0	0
# to	229	165	139	129	123	129	257	226	194	181	185	156

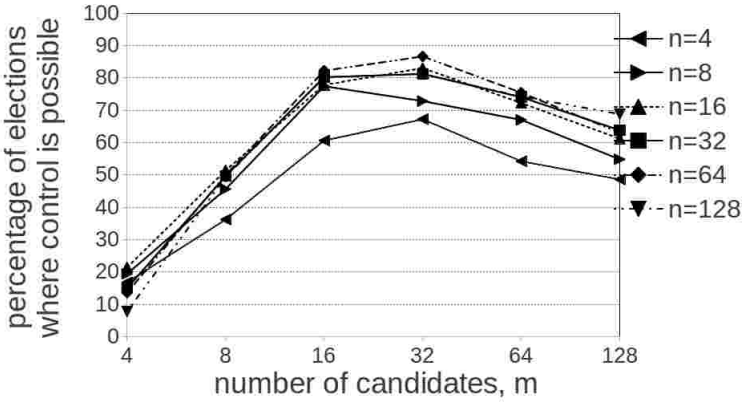


Figure 36: Results for fallback voting in the IC model for destructive control by deleting candidates. Number of voters is fixed.

	$n=4$						$n=8$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	84	181	303	336	271	243	97	228	387	364	335	274
# ci	416	319	197	1	0	0	403	272	113	0	0	0
# to	0	0	0	163	229	257	0	0	0	136	165	226
	$n=16$						$n=32$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	107	257	389	415	361	306	75	248	401	405	371	319
# ci	393	243	111	0	0	0	425	252	99	0	0	0
# to	0	0	0	85	139	194	0	0	0	94	19	181
	$n=64$						$n=128$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	68	250	411	433	377	315	39	247	401	406	371	344
# ci	432	250	89	0	0	0	461	253	99	0	0	0
# to	0	0	0	67	123	185	0	0	0	94	129	156

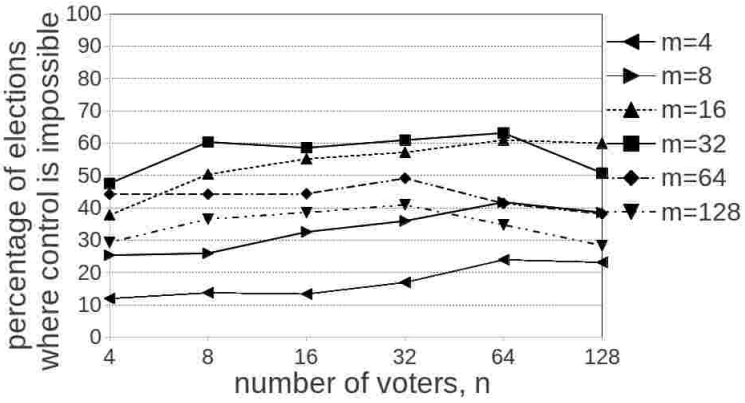


Figure 37: Results for fallback voting in the TM model for destructive control by deleting candidates. Number of candidates is fixed.

	$m=4$						$m=8$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	60	69	67	85	120	116	127	130	163	180	209	193
# ci	440	431	433	415	380	384	373	370	337	320	291	307
# to	0	0	0	0	0	0	0	0	0	0	0	0
	$m=16$						$m=32$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	189	252	276	286	305	300	238	302	293	305	316	254
# ci	311	248	224	214	195	200	153	104	81	34	21	15
# to	0	0	0	0	0	0	109	94	126	161	163	231
	$m=64$						$m=128$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	221	221	222	26	207	191	147	183	193	205	174	142
# ci	110	96	69	23	8	6	123	101	66	18	7	7
# to	169	183	209	231	285	303	230	216	241	277	319	351

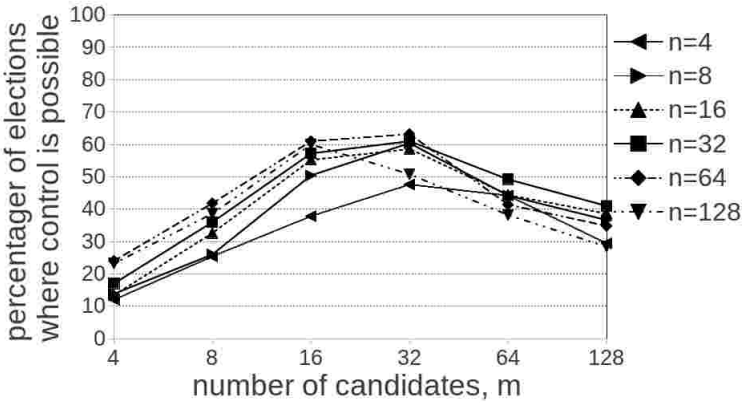


Figure 38: Results for fallback voting in the TM model for destructive control by deleting candidates. Number of voters is fixed.

	$n=4$						$n=8$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	60	127	189	238	221	147	69	130	252	302	221	183
# ci	440	373	311	153	110	123	431	370	248	104	96	101
# to	0	0	0	109	169	230	0	0	0	94	183	216
	$n=16$						$n=32$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	67	163	276	293	222	193	85	180	286	305	246	205
# ci	433	337	224	81	69	66	415	320	214	34	23	18
# to	0	0	0	126	209	241	0	0	0	161	231	277
	$n=64$						$n=128$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	120	209	305	316	207	174	116	193	300	254	191	142
# ci	380	291	195	21	8	7	384	307	200	15	6	0
# to	0	0	0	163	285	319	0	0	0	231	303	351

A.4.1. Computational Costs

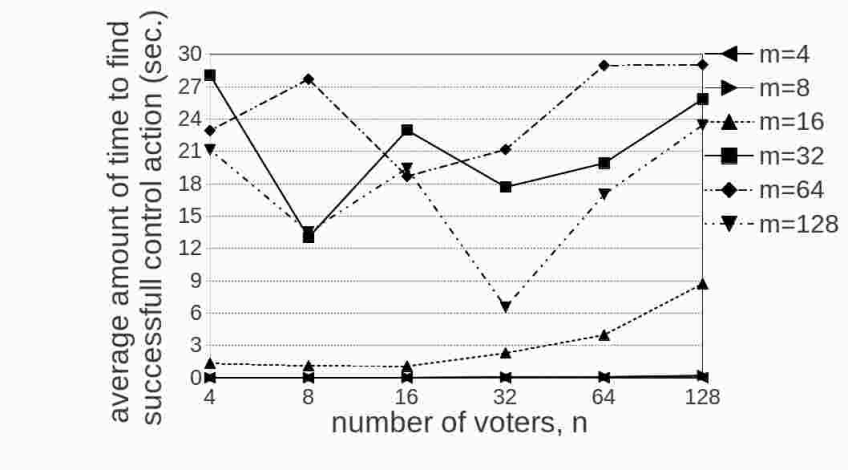


Figure 39: Average time the algorithm needs to find a successful control action for destructive control by deleting candidates in fallback elections in the IC model. The maximum is 29,04 seconds.

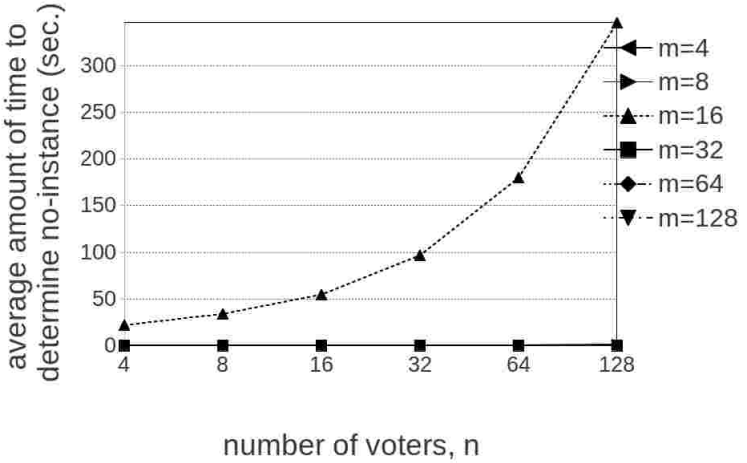


Figure 40: Average time the algorithm needs to determine no-instance of destructive control by deleting candidates in fallback elections in the IC model. The maximum is 345,94 seconds.

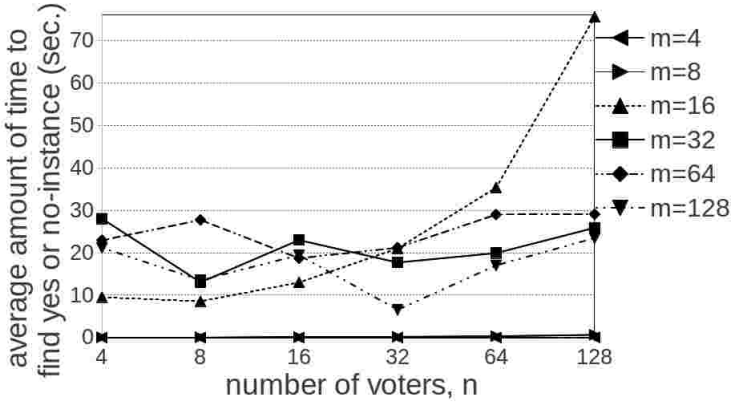


Figure 41: Average time the algorithm needs to give a definite output for destructive control by deleting candidates in fallback elections in the IC model. The maximum is $75,5$ seconds.

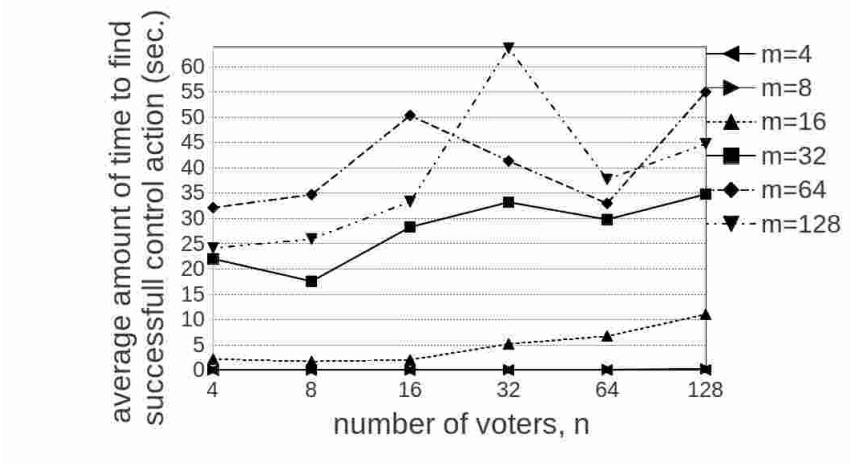


Figure 42: Average time the algorithm needs to find a successful control action for destructive control by deleting candidates in fallback elections in the TM model. The maximum is $63,71$ seconds.

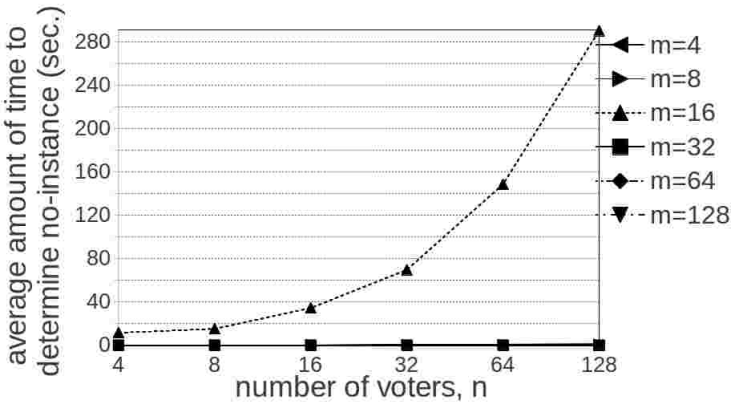


Figure 43: Average time the algorithm needs to determine no-instance of destructive control by deleting candidates in fallback elections in the TM model. The maximum is 290,26 seconds.

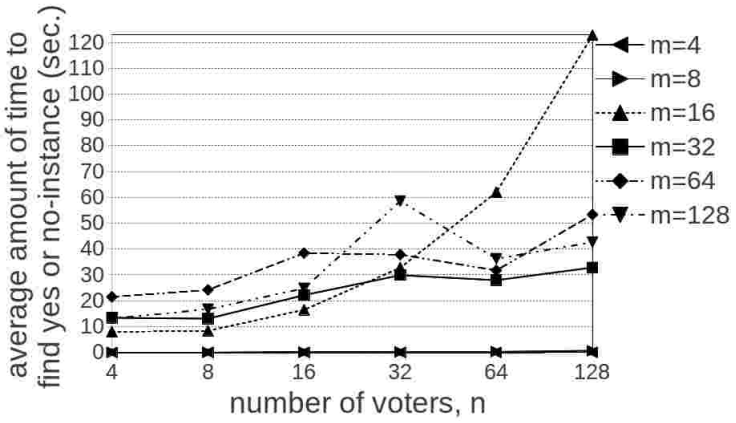


Figure 44: Average time the algorithm needs to give a definite output for destructive control by deleting candidates in fallback elections in the TM model. The maximum is 122,72 seconds.

A.5. Constructive Control by Partition of Candidates in Model TE

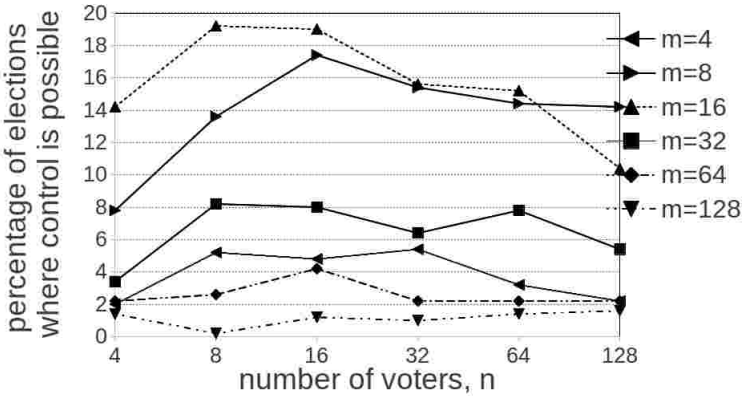


Figure 45: Results for fallback voting in the IC model for constructive control by partition of candidates in model TE. Number of candidates is fixed.

	$m=4$						$m=8$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	10	26	24	27	16	11	39	68	87	77	72	71
# ci	490	474	476	473	484	489	461	432	413	423	428	429
# to	0	0	0	0	0	0	0	0	0	0	0	0
	$m=16$						$m=32$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	71	96	95	78	76	52	17	41	40	32	39	27
# ci	0	0	0	0	0	0	0	0	0	0	0	0
# to	429	404	405	422	424	448	483	459	460	468	461	473
	$m=64$						$m=128$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	11	13	21	11	11	11	7	1	6	5	7	8
# ci	0	0	0	0	0	0	0	0	0	0	0	0
# to	489	487	479	489	489	489	493	499	494	495	493	492

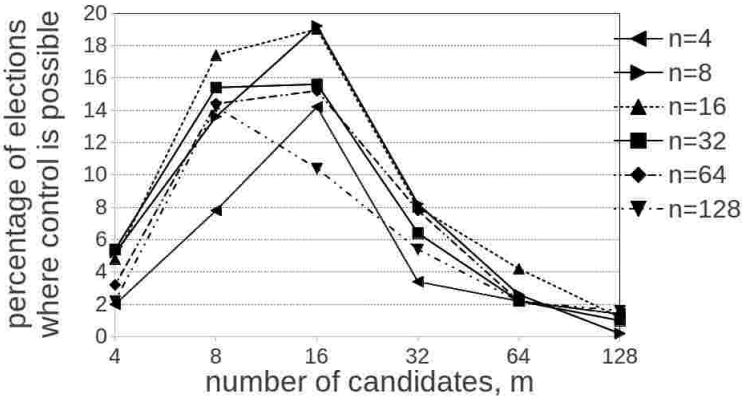


Figure 46: Results for fallback voting in the IC model for constructive control by partition of candidates in model TE. Number of voters is fixed.

	$n=4$						$n=8$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	10	39	71	17	11	7	26	68	96	41	13	1
# ci	490	461	0	0	0	0	474	432	0	0	0	0
# to	0	0	429	483	489	493	0	0	404	459	487	499
	$n=16$						$n=32$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	24	87	95	40	21	6	27	77	78	32	11	5
# ci	476	413	0	0	0	0	473	423	0	0	0	0
# to	0	0	405	460	479	494	0	0	422	468	489	495
	$n=64$						$n=128$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	16	72	76	39	11	7	11	71	52	27	11	8
# ci	484	428	0	0	0	0	489	429	0	0	0	0
# to	0	0	424	461	489	493	0	0	448	473	489	492

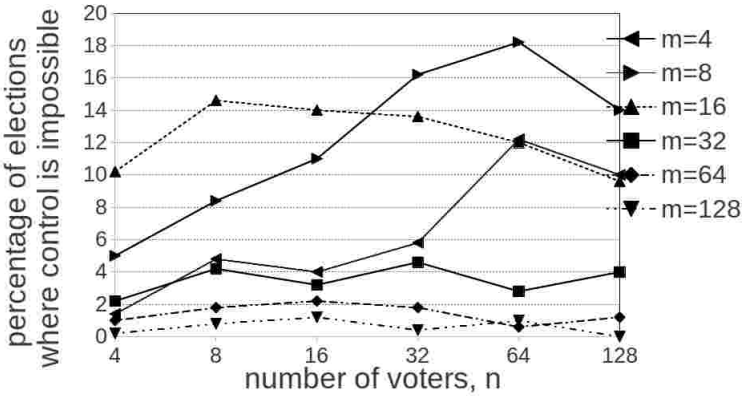


Figure 47: Results for fallback voting in the TM model for constructive control by partition of candidates in model TE. Number of candidates is fixed.

	$m=4$						$m=8$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	7	24	20	29	61	50	25	42	55	81	91	70
# ci	493	476	480	471	439	450	475	458	445	419	409	430
# to	0	0	0	0	0	0	0	0	0	0	0	0
	$m=16$						$m=32$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	51	73	70	68	60	48	11	21	16	23	14	20
# ci	0	0	0	0	0	0	0	0	0	0	0	0
# to	449	427	430	432	440	452	489	479	484	477	486	480
	$m=64$						$m=128$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	5	9	11	9	3	6	1	4	6	2	5	0
# ci	0	0	0	0	0	0	0	0	0	0	0	0
# to	495	491	489	491	497	494	499	496	494	498	495	500

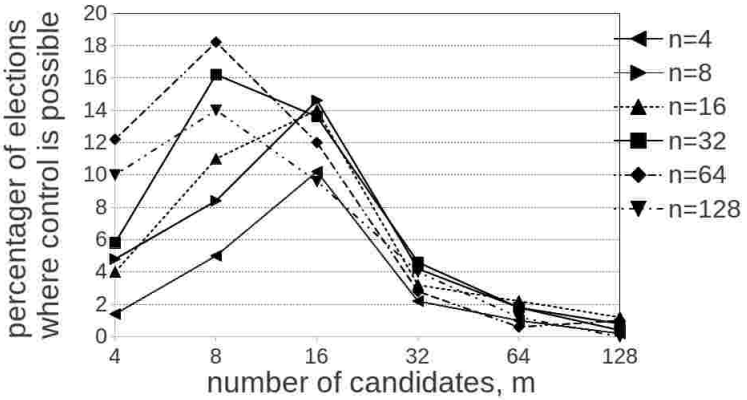


Figure 48: Results for fallback voting in the TM model for constructive control by partition of candidates in model TE. Number of voters is fixed.

	$n=4$						$n=8$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	7	25	51	11	5	1	24	42	73	21	9	4
# ci	493	475	0	0	0	0	476	458	0	0	0	0
# to	0	0	449	489	495	499	0	0	427	479	491	496
	$n=16$						$n=32$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	20	55	70	16	11	6	29	81	68	23	9	2
# ci	480	455	0	0	0	0	471	419	0	0	0	0
# to	0	0	430	484	489	494	0	0	432	477	491	498
	$n=64$						$n=128$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	61	91	60	14	3	5	5	70	48	20	6	0
# ci	439	409	0	0	0	0	495	430	0	0	0	0
# to	0	0	440	486	497	495	0	0	452	480	494	500

A.5.1. Computational Costs

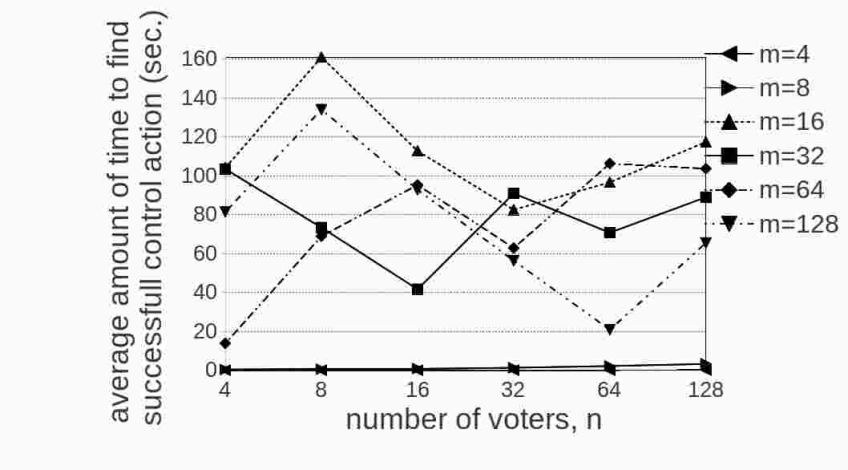


Figure 49: Average time the algorithm needs to find a successful control action for constructive control by partition of candidates in model TE in fallback elections in the IC model. The maximum is $160,89$ seconds.

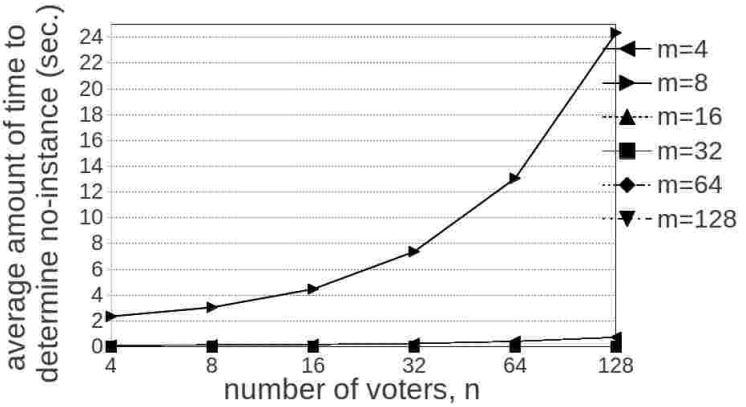


Figure 50: Average time the algorithm needs to determine no-instance of constructive control by partition of candidates in model TE in fallback elections in the IC model. The maximum is $24,34$ seconds.

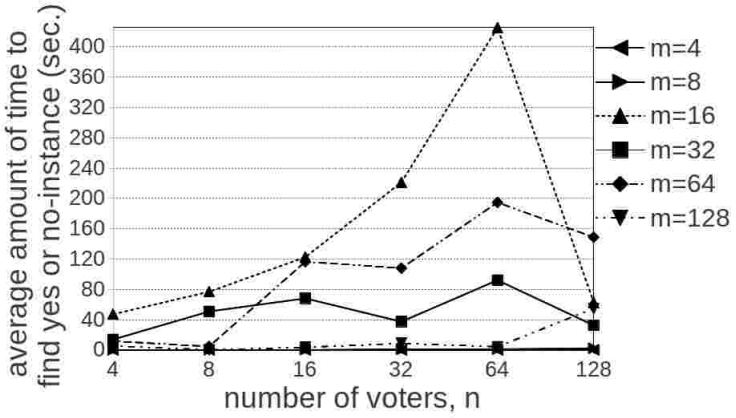


Figure 51: Average time the algorithm needs to give a definite output for constructive control by partition of candidates in model TE in fallback elections in the IC model. The maximum is 425,43 seconds.

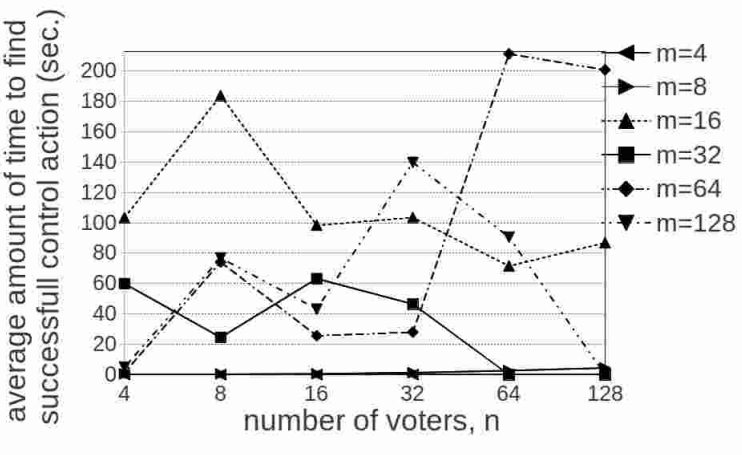


Figure 52: Average time the algorithm needs to find a successful control action for constructive control by partition of candidates in model TE in fallback elections in the TM model. The maximum is 211,22 seconds.

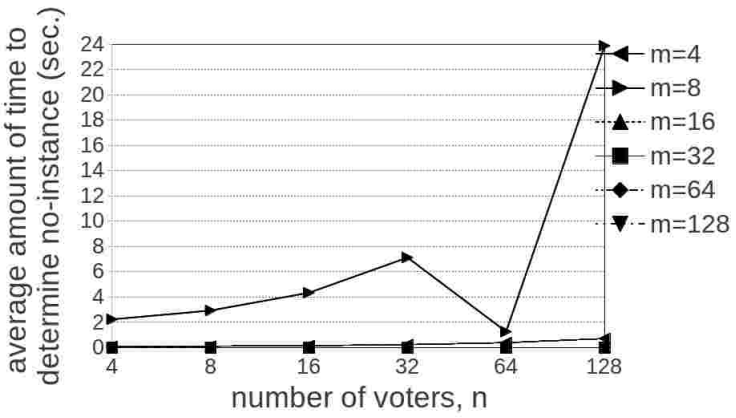


Figure 53: Average time the algorithm needs to determine no-instance of constructive control by partition of candidates in model TE in fallback elections in the TM model. The maximum is $23,89$ seconds.

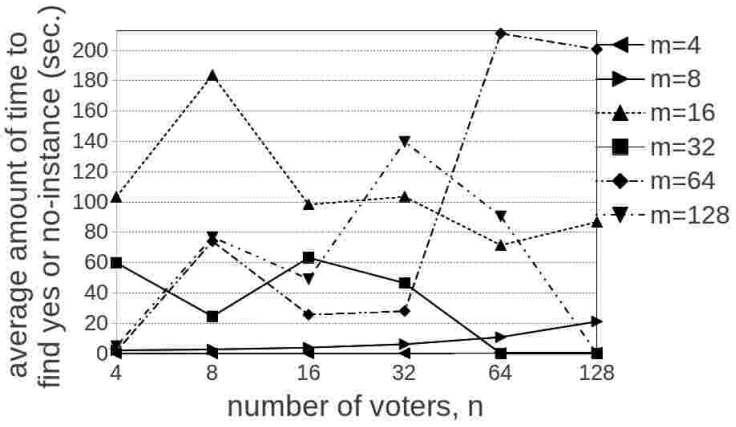


Figure 54: Average time the algorithm needs to give a definite output for constructive control by partition of candidates in model TE in fallback elections in the TM model. The maximum is $211,22$ seconds.

A.6. Destructive Control by Partition of Candidates in Model TE

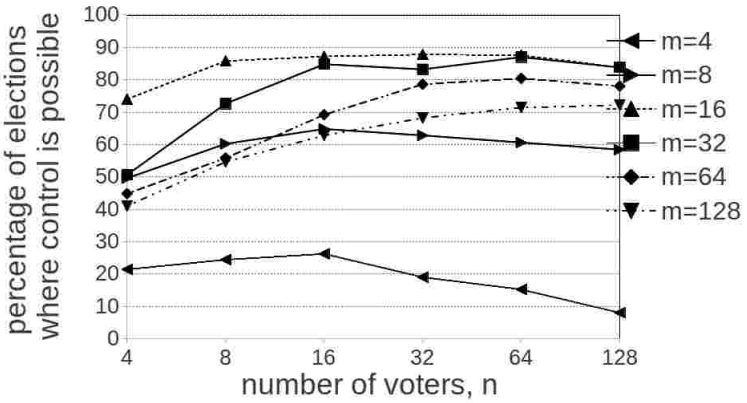


Figure 55: Results for fallback voting in the IC model for destructive control by partition of candidates in model TE. Number of candidates is fixed.

	$m=4$						$m=8$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	107	122	131	95	76	40	248	301	324	314	303	292
# ci	393	378	369	405	424	460	252	199	176	186	197	208
# to	0	0	0	0	0	0	0	0	0	0	0	0
	$m=16$						$m=32$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	370	429	436	439	438	419	253	363	424	416	435	419
# ci	9	0	0	0	0	0	1	0	0	0	0	0
# to	121	71	64	61	62	81	246	137	76	84	65	81
	$m=64$						$m=128$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	224	279	346	393	402	390	205	273	314	341	357	361
# ci	0	0	0	0	0	0	0	0	0	0	0	0
# to	276	221	154	107	98	110	295	227	186	159	143	139

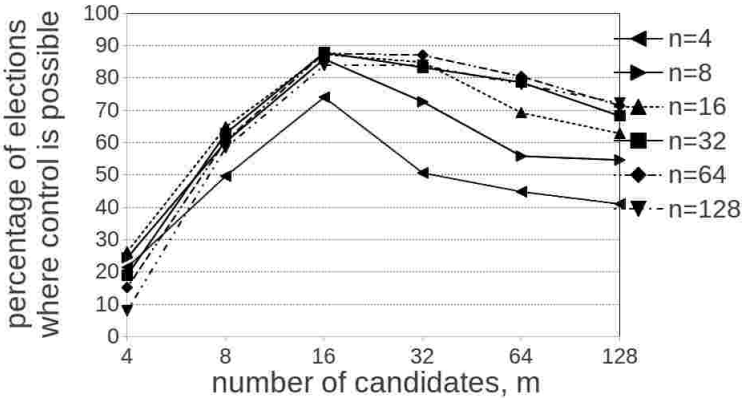


Figure 56: Results for fallback voting in the IC model for destructive control by partition of candidates in model TE. Number of voters is fixed.

	$n=4$						$n=8$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	107	248	370	253	224	205	122	301	429	363	279	273
# ci	393	252	9	1	0	0	378	199	0	0	0	0
# to	0	0	121	246	276	295	0	0	71	137	221	227
	$n=16$						$n=32$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	131	324	436	424	346	314	95	314	439	416	393	341
# ci	369	176	0	0	0	0	405	186	0	0	0	0
# to	0	0	64	76	154	186	0	0	61	84	107	159
	$n=64$						$n=128$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	76	303	438	435	402	357	40	292	419	419	390	361
# ci	424	197	0	0	0	0	460	208	0	0	0	0
# to	0	0	62	65	98	143	0	0	81	81	110	139

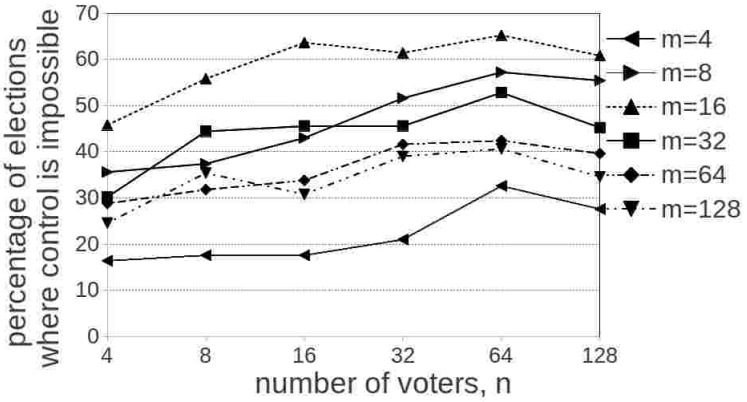


Figure 57: Results for fallback voting in the TM model for destructive control by partition of candidates in model TE. Number of candidates is fixed.

	$m=4$						$m=8$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	82	88	88	105	163	138	178	187	215	258	286	277
# ci	418	412	412	395	337	362	322	313	285	242	214	223
# to	0	0	0	0	0	0	0	0	0	0	0	0
	$m=16$						$m=32$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	229	279	318	307	326	304	151	222	228	228	264	226
# ci	159	138	83	56	30	29	153	104	81	34	21	15
# to	112	83	99	137	144	167	196	174	191	238	215	259
	$m=64$						$m=128$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	144	159	169	208	212	198	123	177	154	195	203	173
# ci	110	96	69	23	8	6	123	101	60	18	7	7
# to	246	245	262	269	280	296	254	222	242	287	290	320

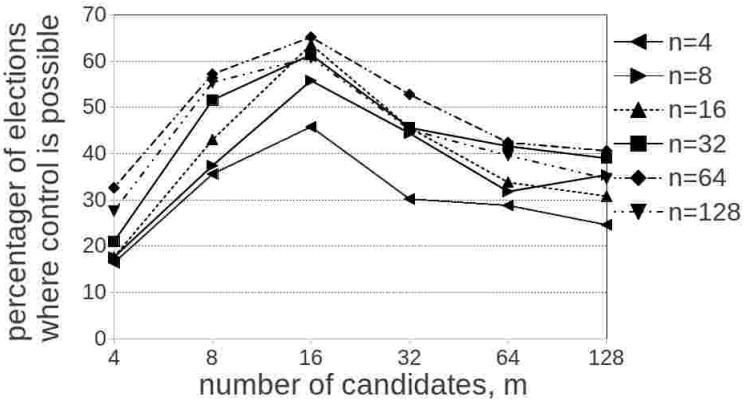


Figure 58: Results for fallback voting in the TM model for destructive control by partition of candidates in model TE. Number of voters is fixed.

	$n=4$						$n=8$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	82	178	229	151	144	123	88	187	279	222	159	177
# ci	418	322	159	153	110	123	412	313	138	104	96	101
# to	0	0	112	196	246	254	0	0	83	174	245	222
	$n=16$						$n=32$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	88	215	318	228	169	154	105	258	307	228	208	195
# ci	412	285	83	81	69	60	395	242	56	34	23	18
# to	0	0	99	191	262	242	0	0	137	238	269	287
	$n=64$						$n=128$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	163	286	326	264	212	203	138	277	304	226	198	173
# ci	337	214	30	21	8	7	362	223	29	15	6	7
# to	0	0	144	215	280	290	0	0	167	259	296	320

A.6.1. Computational Costs

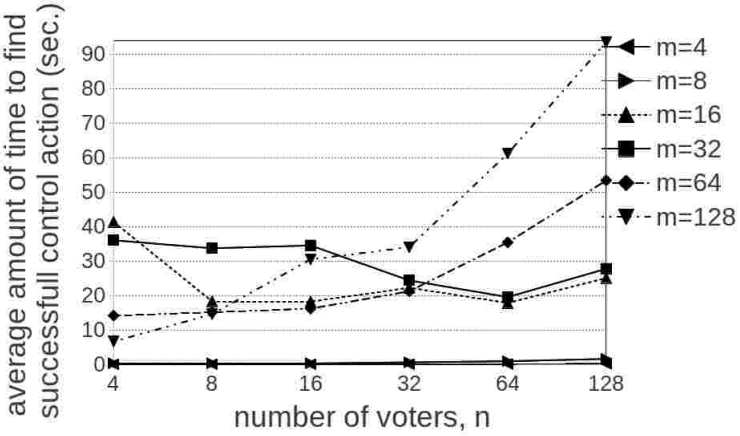


Figure 59: Average time the algorithm needs to find a successful control action for destructive control by partition of candidates in model TE in fallback elections in the IC model. The maximum is $93,6$ seconds.

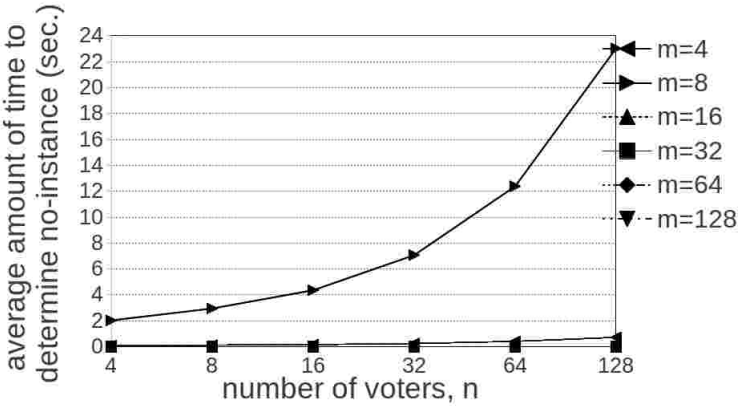


Figure 60: Average time the algorithm needs to determine no-instance of destructive control by partition of candidates in model TE in fallback elections in the IC model. The maximum is $23,03$ seconds.

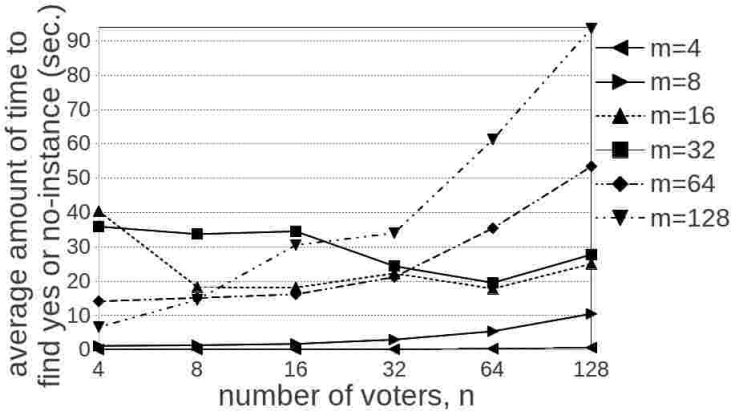


Figure 61: Average time the algorithm needs to give a definite output for destructive control by partition of candidates in model TE in fallback elections in the IC model. The maximum is $93,6$ seconds.

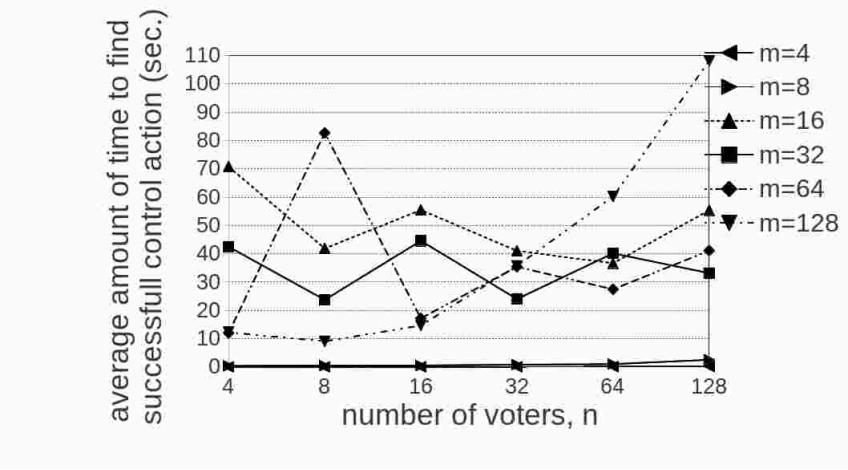


Figure 62: Average time the algorithm needs to find a successful control action for destructive control by partition of candidates in model TE in fallback elections in the TM model. The maximum is $108,15$ seconds.

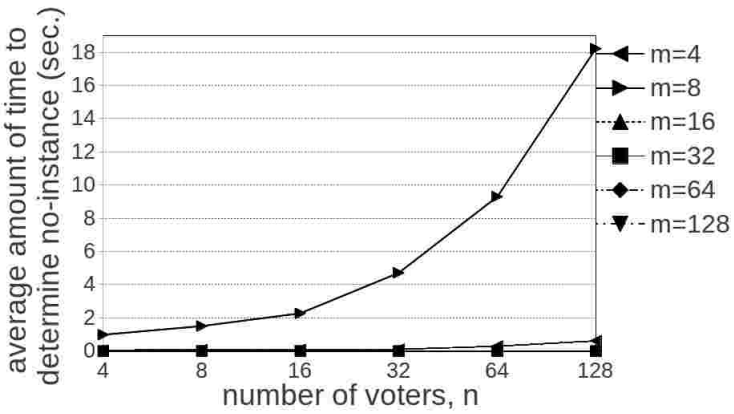


Figure 63: Average time the algorithm needs to determine no-instance of destructive control by partition of candidates in model TE in fallback elections in the TM model. The maximum is $18,22$ seconds.

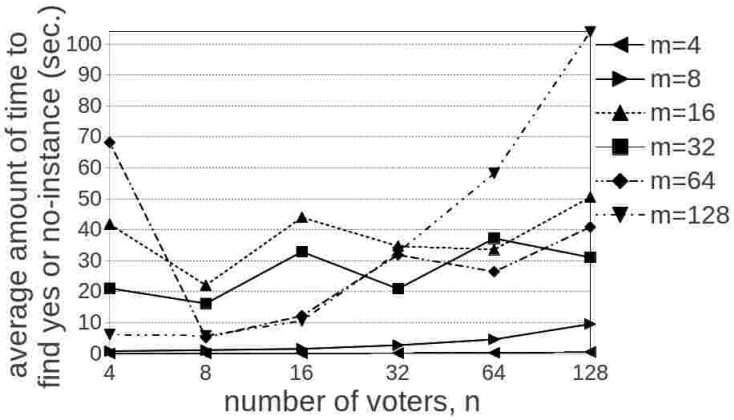


Figure 64: Average time the algorithm needs to give a definite output for destructive control by partition of candidates in model TE in fallback elections in the TM model. The maximum is $103,95$ seconds.

A.7. Constructive Control by Partition of Candidates in Model TP

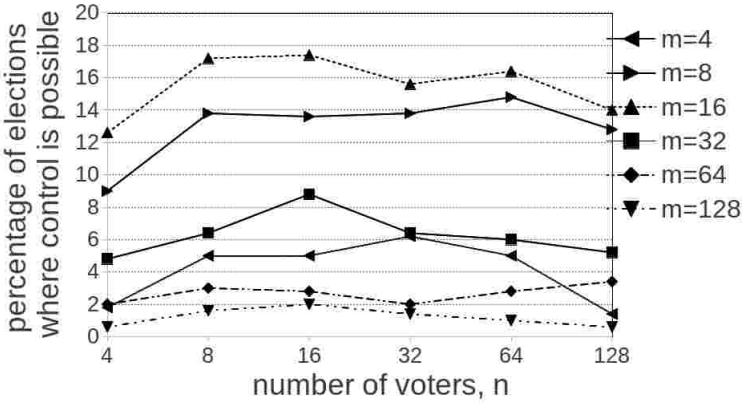


Figure 65: Results for fallback voting in the IC model for constructive control by partition of candidates in model TP. Number of candidates is fixed.

	$m=4$						$m=8$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	9	25	25	31	25	7	45	69	68	69	74	64
# ci	491	475	475	469	475	493	455	431	432	431	426	436
# to	0	0	0	0	0	0	0	0	0	0	0	0
	$m=16$						$m=32$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	63	86	87	78	82	70	24	32	44	32	30	26
# ci	0	0	0	0	0	0	0	0	0	0	0	0
# to	437	414	413	422	418	430	476	468	456	468	470	474
	$m=64$						$m=128$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	10	15	14	10	14	17	3	8	10	7	5	3
# ci	0	0	0	0	0	0	0	0	0	0	0	0
# to	490	485	486	490	486	483	497	492	490	493	495	497

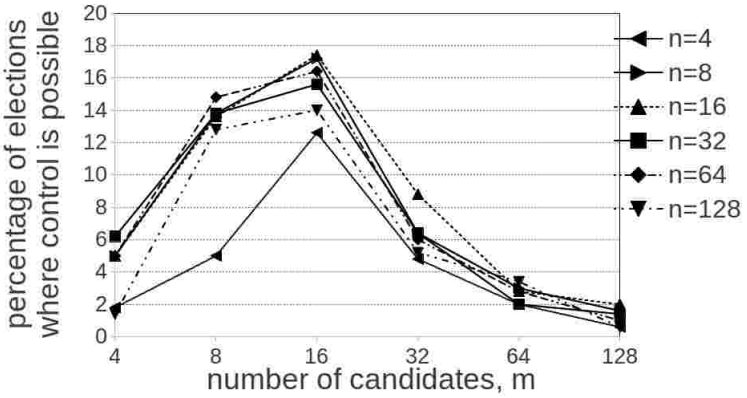


Figure 66: Results for fallback voting in the IC model for constructive control by partition of candidates in model TP. Number of voters is fixed.

	$n=4$						$n=8$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	9	45	63	24	10	3	25	69	86	32	15	8
# ci	491	455	0	0	0	0	475	431	0	0	0	0
# to	0	0	437	476	490	497	0	0	414	468	485	492
	$n=16$						$n=32$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	25	68	87	44	14	10	31	69	78	32	10	7
# ci	475	432	0	0	0	0	469	431	0	0	0	0
# to	0	0	413	456	486	490	0	0	422	468	490	493
	$n=64$						$n=128$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	25	74	82	30	14	5	7	64	7	26	17	3
# ci	475	426	0	0	0	0	493	436	0	0	0	0
# to	0	0	418	470	486	495	0	0	493	474	483	497

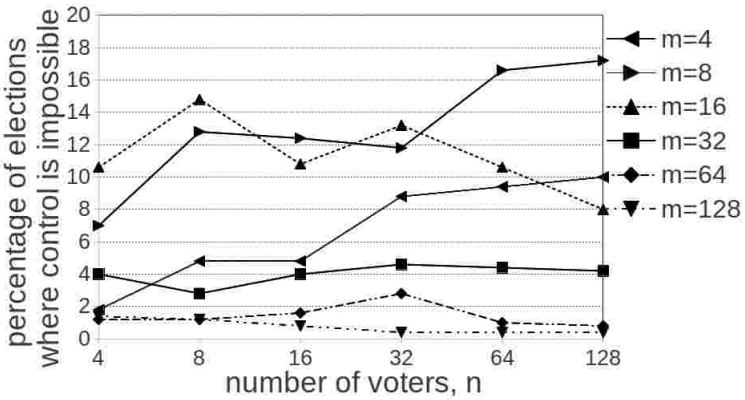


Figure 67: Results for fallback voting in the TM model for constructive control by partition of candidates in model TP. Number of candidates is fixed.

	$m=4$						$m=8$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	9	24	24	44	47	50	35	64	62	59	83	86
# ci	491	476	476	456	453	450	465	436	438	441	417	414
# to	0	0	0	0	0	0	0	0	0	0	0	0
	$m=16$						$m=32$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	53	74	54	66	53	40	20	14	20	23	22	21
# ci	0	0	0	0	0	0	0	0	0	0	0	0
# to	447	426	446	434	447	460	480	486	480	477	478	479
	$m=64$						$m=128$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	6	6	8	14	5	4	7	6	4	2	2	2
# ci	0	0	0	0	0	0	0	0	0	0	0	0
# to	494	494	492	486	495	496	493	494	496	498	498	498

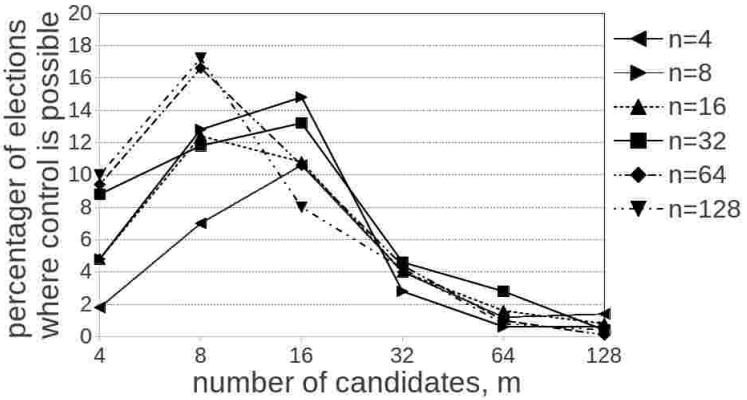


Figure 68: Results for fallback voting in the TM model for constructive control by partition of candidates in model TP. Number of voters is fixed.

	$n=4$						$n=8$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	9	35	53	20	6	7	24	64	74	14	6	6
# ci	491	465	0	0	0	0	476	436	0	0	0	0
# to	0	0	447	480	494	493	0	0	426	486	494	494
	$n=16$						$n=32$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	24	62	54	20	8	4	44	59	66	23	14	2
# ci	476	438	0	0	0	0	456	441	0	0	0	0
# to	0	0	446	480	492	496	0	0	434	477	486	498
	$n=64$						$n=128$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	47	83	53	22	5	2	50	86	40	21	4	2
# ci	453	417	0	0	0	0	450	414	0	0	0	0
# to	0	0	447	478	495	498	0	0	460	479	496	498

A.7.1. Computational Costs

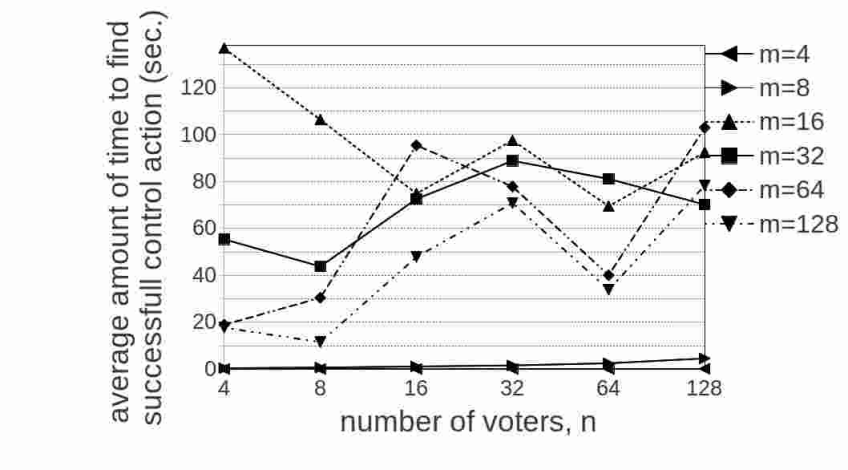


Figure 69: Average time the algorithm needs to find a successful control action for constructive control by partition of candidates in model TP in fallback elections in the IC model. The maximum is $136,83$ seconds.

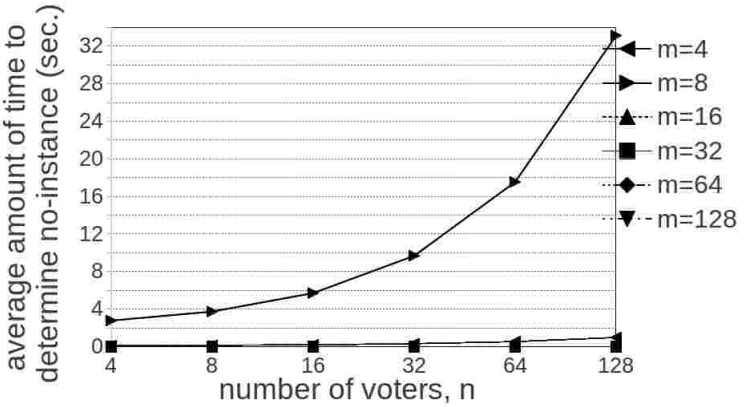


Figure 70: Average time the algorithm needs to determine no-instance of constructive control by partition of candidates in model TP in fallback elections in the IC model. The maximum is $33,13$ seconds.

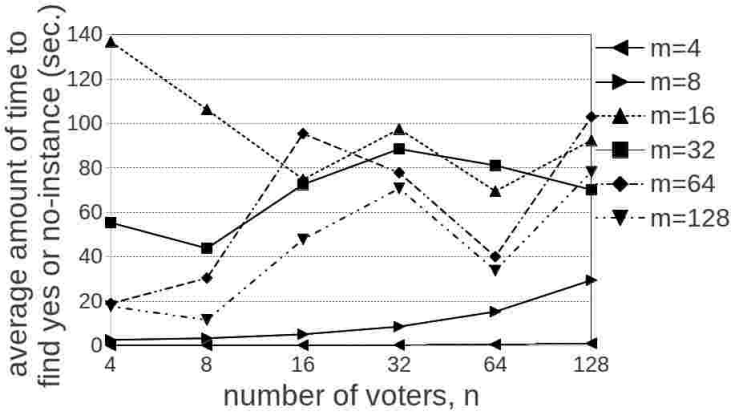


Figure 71: Average time the algorithm needs to give a definite output for constructive control by partition of candidates in model TP in fallback elections in the IC model. The maximum is $136,83$ seconds.

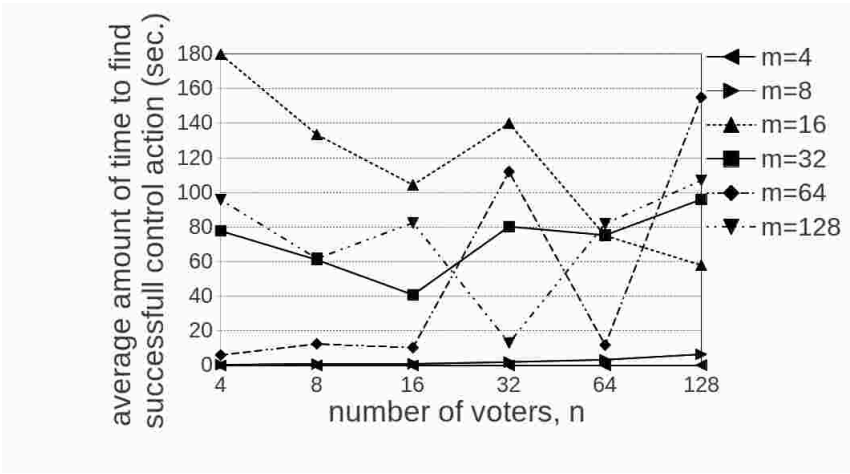


Figure 72: Average time the algorithm needs to find a successful control action for constructive control by partition of candidates in model TP in fallback elections in the TM model. The maximum is $179,79$ seconds.

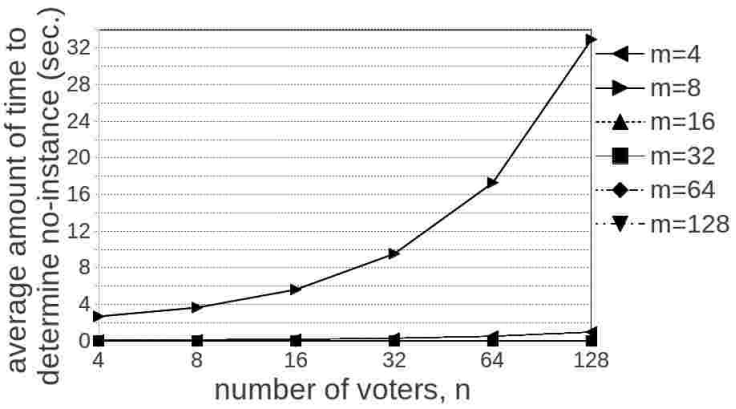


Figure 73: Average time the algorithm needs to determine no-instance of constructive control by partition of candidates in model TP in fallback elections in the TM model. The maximum is $32,92$ seconds.

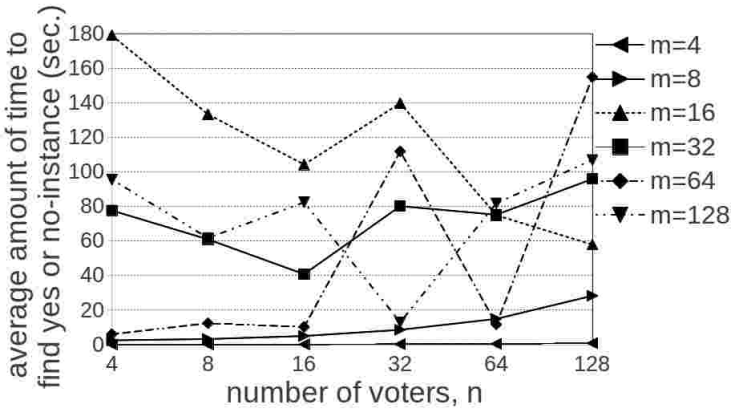


Figure 74: Average time the algorithm needs to give a definite output for constructive control by partition of candidates in model TP in fallback elections in the TM model. The maximum is $179,19$ seconds.

A.8. Destructive Control by Partition of Candidates in Model TP

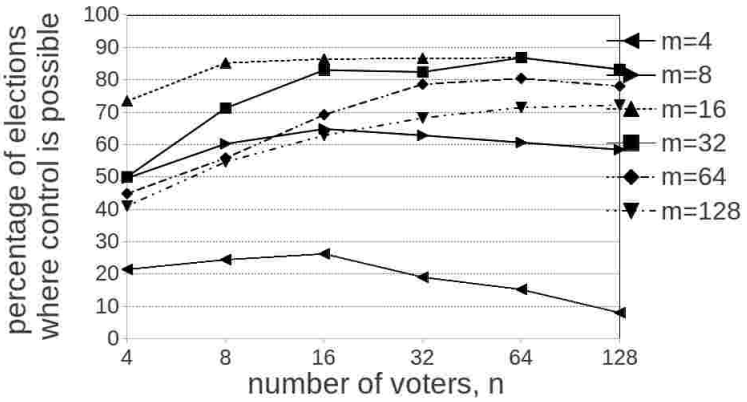


Figure 75: Results for fallback voting in the IC model for destructive control by partition of candidates in model TP. Number of candidates is fixed.

	$m=4$						$m=8$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	107	122	131	95	76	40	248	301	324	314	303	292
# ci	393	378	369	405	424	460	252	199	176	186	197	208
# to	0	0	0	0	0	0	0	0	0	0	0	0
	$m=16$						$m=32$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	367	426	432	433	434	416	250	356	415	412	434	416
# ci	9	0	0	0	0	0	1	0	0	0	0	0
# to	124	74	68	67	66	84	249	144	85	88	66	84
	$m=64$						$m=128$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	224	279	346	393	402	390	205	273	314	341	357	361
# ci	0	0	0	0	0	0	0	0	0	0	0	0
# to	276	221	154	107	98	110	295	227	186	159	143	139

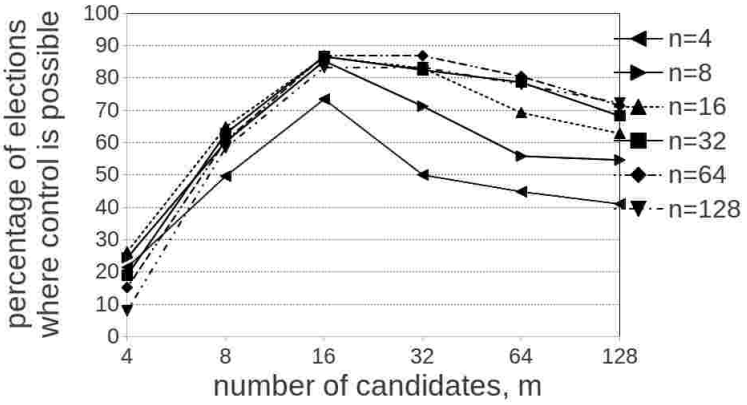


Figure 76: Results for fallback voting in the IC model for destructive control by partition of candidates in model TP. Number of voters is fixed.

	$n=4$						$n=8$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	107	248	367	250	224	205	122	301	426	356	279	273
# ci	393	252	9	1	0	0	378	199	0	0	0	0
# to	0	0	124	249	276	295	0	0	74	144	221	227
	$n=16$						$n=32$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	131	324	432	415	346	314	95	314	433	412	393	341
# ci	369	176	0	0	0	0	405	186	0	0	0	0
# to	0	0	68	85	154	186	0	0	67	88	107	159
	$n=64$						$n=128$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	76	303	434	434	402	357	40	292	416	416	390	361
# ci	424	197	0	0	0	0	460	208	0	0	0	0
# to	0	0	66	66	98	143	0	0	84	84	110	139

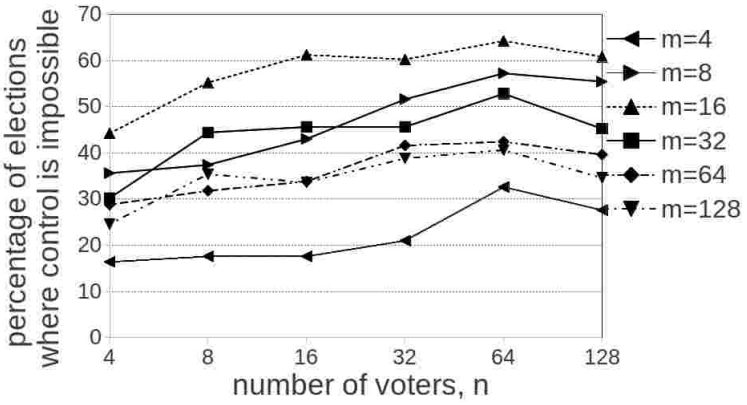


Figure 77: Results for fallback voting in the TM model for destructive control by partition of candidates in model TP. Number of candidates is fixed.

	$m=4$						$m=8$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	82	88	88	105	163	138	178	187	215	258	286	277
# ci	418	412	412	395	337	362	322	313	285	242	214	223
# to	0	0	0	0	0	0	0	0	0	0	0	0
	$m=16$						$m=32$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	221	276	306	301	321	304	151	222	228	228	264	226
# ci	159	137	83	56	30	29	153	104	81	34	21	15
# to	120	87	111	143	149	167	196	174	191	238	215	259
	$m=64$						$m=128$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	144	159	169	208	212	198	123	177	168	194	203	173
# ci	110	96	69	23	8	6	123	101	66	18	7	7
# to	246	245	262	269	280	296	254	222	266	288	290	320

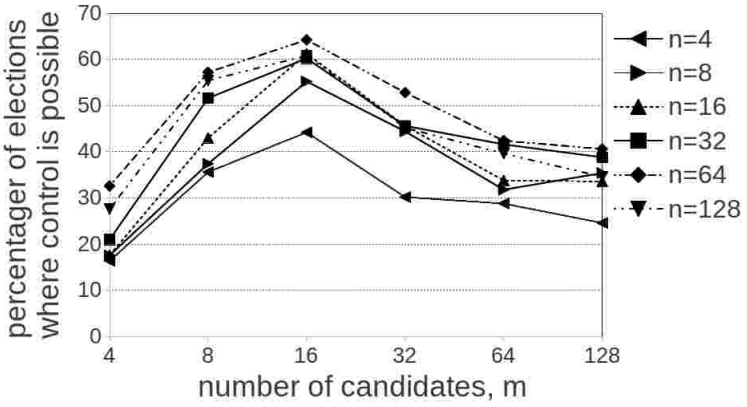


Figure 78: Results for fallback voting in the TM model for destructive control by partition of candidates in model TP. Number of voters is fixed.

	$n=4$						$n=8$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	82	178	221	151	144	123	88	187	276	222	159	177
# ci	418	322	159	153	110	123	412	313	137	104	96	101
# to	0	0	120	196	246	254	0	0	87	174	245	222
	$n=16$						$n=32$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	88	215	306	228	169	168	105	258	301	228	208	194
# ci	412	285	83	81	69	66	395	242	56	34	23	18
# to	0	0	111	191	262	266	0	0	143	238	269	288
	$n=64$						$n=128$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	163	286	321	264	212	203	138	277	304	226	198	173
# ci	337	214	30	21	8	7	362	223	29	15	6	7
# to	0	0	149	215	280	290	0	0	167	259	296	320

A.8.1. Computational Costs

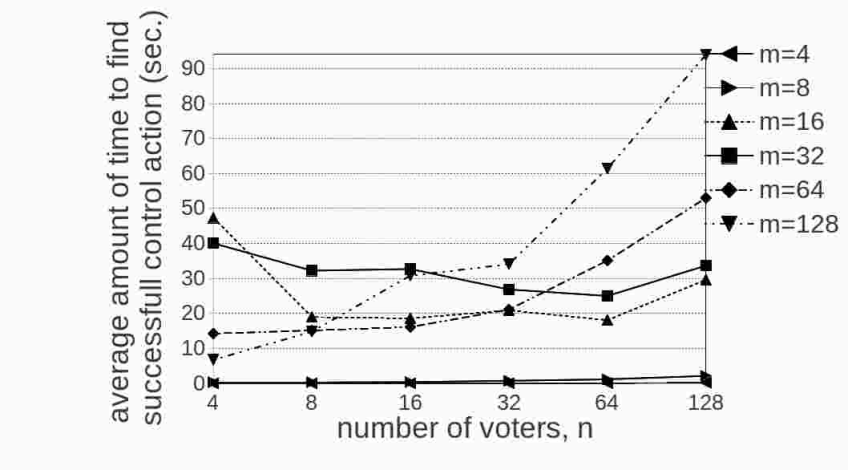


Figure 79: Average time the algorithm needs to find a successful control action for destructive control by partition of candidates in model TP in fallback elections in the IC model. The maximum is $93,92$ seconds.

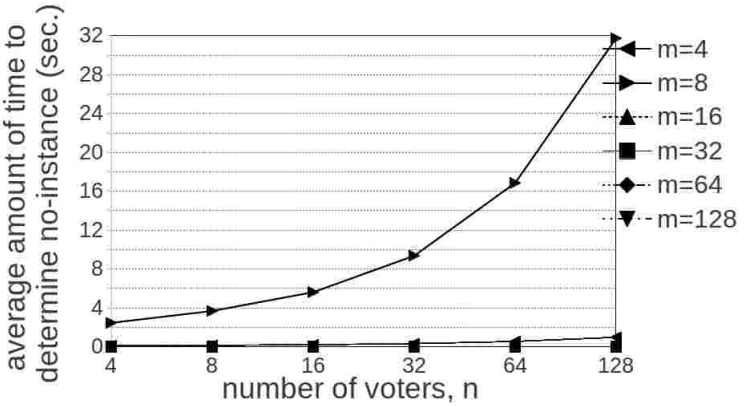


Figure 80: Average time the algorithm needs to determine no-instance of destructive control by partition of candidates in model TP in fallback elections in the IC model. The maximum is $31,75$ seconds.

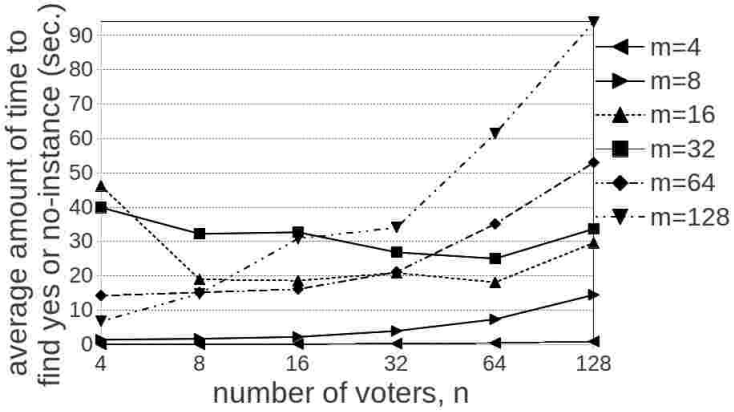


Figure 81: Average time the algorithm needs to give a definite output for destructive control by partition of candidates in model TP in fallback elections in the IC model. The maximum is $93,92$ seconds.

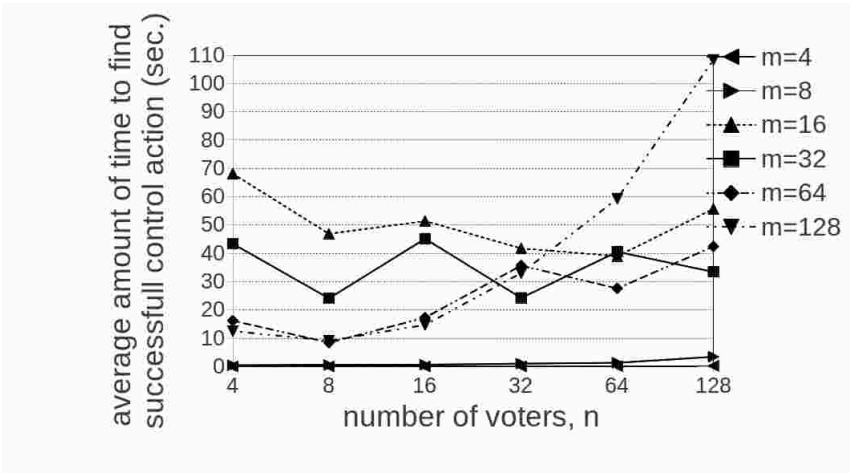


Figure 82: Average time the algorithm needs to find a successful control action for destructive control by partition of candidates in model TP in fallback elections in the TM model. The maximum is $108,35$ seconds.

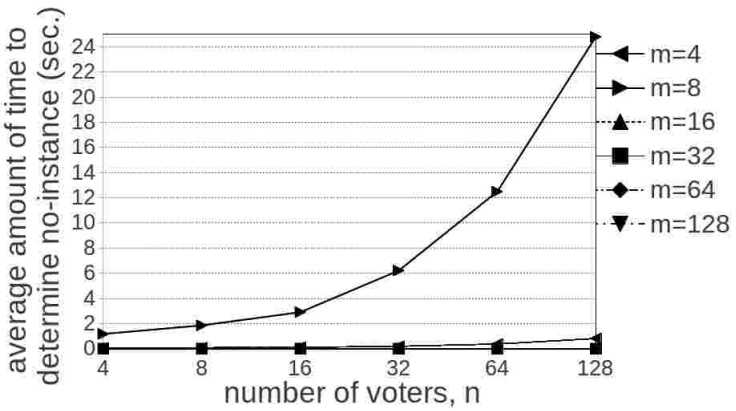


Figure 83: Average time the algorithm needs to determine no-instance of destructive control by partition of candidates in model TP in fallback elections in the TM model. The maximum is $24,8$ seconds.

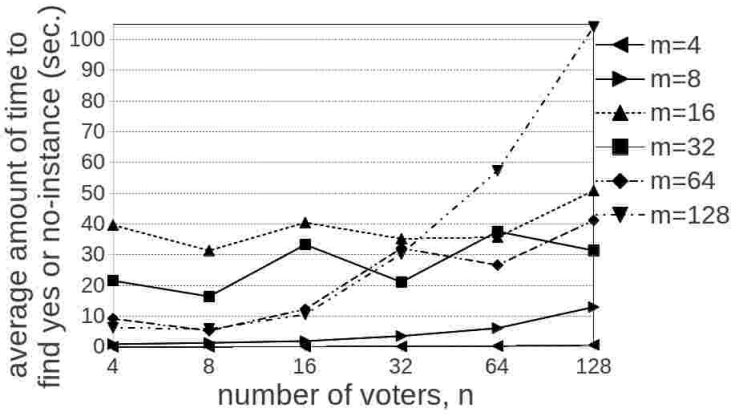


Figure 84: Average time the algorithm needs to give a definite output for destructive control by partition of candidates in model TP in fallback elections in the TM model. The maximum is $104,12$ seconds.

A.9. Constructive Control by Runoff Partition of Candidates in Model TE

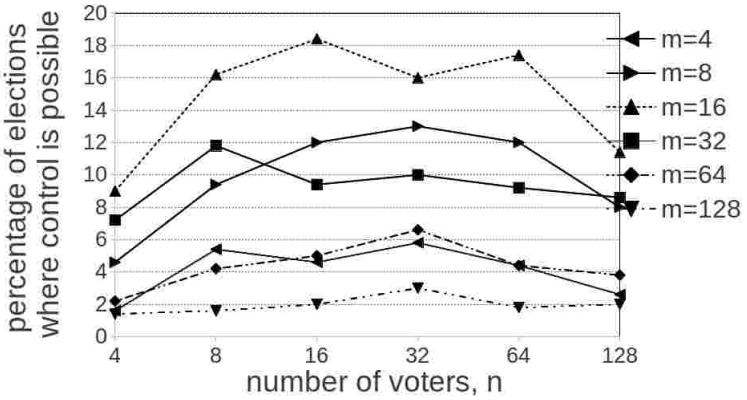


Figure 85: Results for fallback voting in the IC model for constructive control by runoff-partition of candidates in model TE. Number of candidates is fixed.

	$m=4$						$m=8$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	8	27	23	29	22	13	23	47	60	65	60	40
# ci	492	473	477	471	478	487	477	453	440	435	440	460
# to	0	0	0	0	0	0	0	0	0	0	0	0
	$m=16$						$m=32$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	45	81	92	80	87	57	36	59	47	50	41	43
# ci	0	0	0	0	0	0	0	0	0	0	0	0
# to	455	419	408	420	413	443	464	441	453	450	459	457
	$m=64$						$m=128$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	11	21	25	33	22	19	7	8	10	15	9	10
# ci	0	0	0	0	0	0	0	0	0	0	0	0
# to	489	479	475	467	478	481	493	492	490	485	491	490

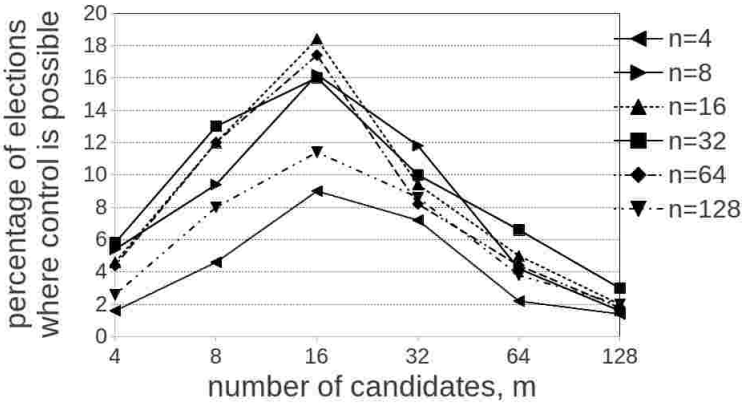


Figure 86: Results for fallback voting in the IC model for constructive control by runoff-partition of candidates in model TE. Number of voters is fixed.

	$n=4$						$n=8$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	8	23	45	36	11	7	27	47	81	59	21	8
# ci	492	477	0	0	0	0	473	453	0	0	0	0
# to	0	0	455	464	489	493	0	0	419	441	479	492
	$n=16$						$n=32$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	23	60	92	47	25	10	29	65	80	50	33	15
# ci	477	440	0	0	0	0	471	435	0	0	0	0
# to	0	0	408	453	475	490	0	0	420	450	467	485
	$n=64$						$n=128$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	22	60	87	41	22	9	13	40	57	43	19	10
# ci	478	440	0	0	0	0	487	460	0	0	0	0
# to	0	0	413	459	478	491	0	0	443	457	481	490

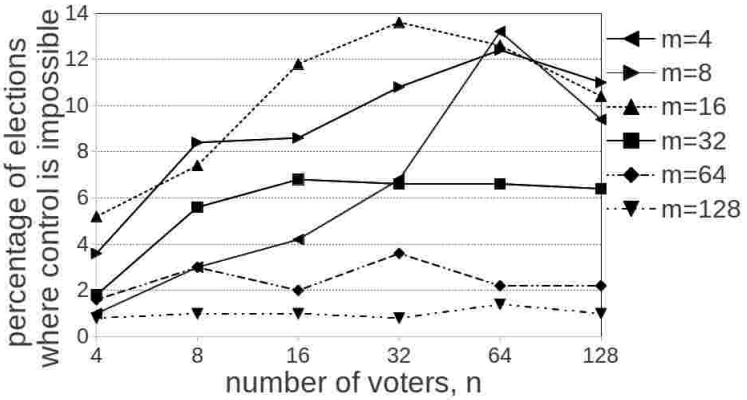


Figure 87: Results for fallback voting in the TM model for constructive control by runoff-partition of candidates in model TE. Number of candidates is fixed.

	$m=4$						$m=8$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	5	15	21	34	56	47	18	42	43	54	62	55
# ci	495	485	479	466	444	453	482	458	457	446	438	445
# to	0	0	0	0	0	0	0	0	0	0	0	0
	$m=16$						$m=32$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	26	37	59	68	63	52	9	28	34	33	33	32
# ci	13	0	0	0	0	0	0	0	0	0	0	0
# to	461	463	441	432	437	448	491	472	466	467	467	468
	$m=64$						$m=128$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	8	15	10	18	11	11	4	5	5	4	7	5
# ci	0	0	0	0	0	0	0	0	0	0	0	0
# to	492	485	490	482	489	489	496	495	495	496	493	495

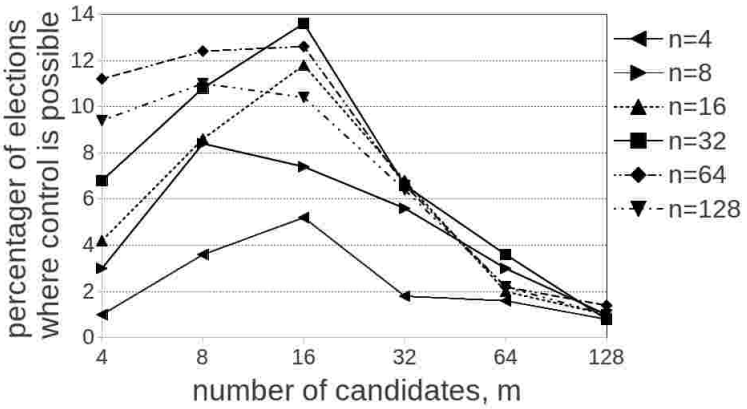


Figure 88: Results for fallback voting in the TM model for constructive control by runoff-partition of candidates in model TE. Number of voters is fixed.

	$n=4$						$n=8$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	5	18	26	9	8	4	15	42	37	28	15	5
# ci	495	482	13	0	0	0	485	458	0	0	0	0
# to	0	0	461	491	492	496	0	0	463	472	485	495
	$n=16$						$n=32$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	21	43	59	34	10	5	34	54	68	33	18	4
# ci	479	457	0	0	0	0	466	446	0	0	0	0
# to	0	0	441	466	490	495	0	0	432	467	482	496
	$n=64$						$n=128$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	56	62	63	33	11	7	47	55	52	32	11	5
# ci	444	438	0	0	0	0	453	445	0	0	0	0
# to	0	0	437	467	489	493	0	0	448	468	489	495

A.9.1. Computational Costs

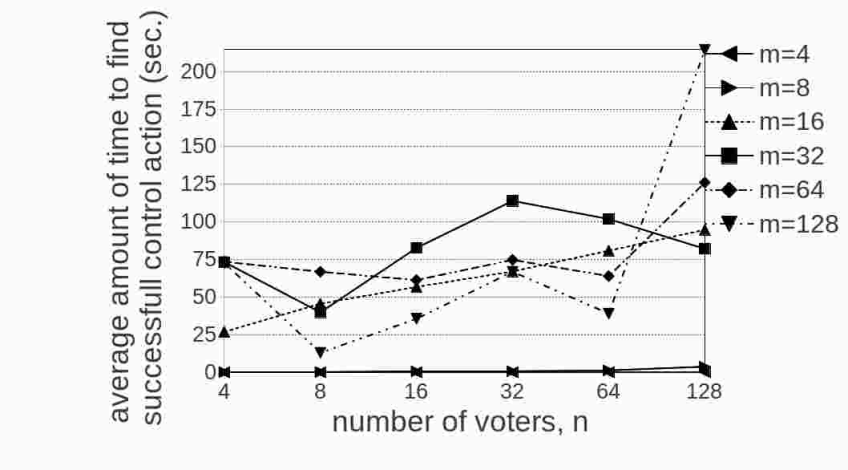


Figure 89: Average time the algorithm needs to find a successful control action for constructive control by runoff-partition of candidates in model TE in fallback elections in the IC model. The maximum is 214, 19 seconds.

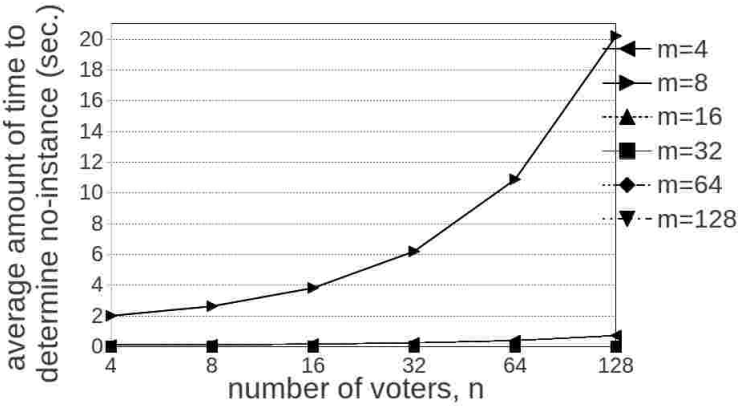


Figure 90: Average time the algorithm needs to determine no-instance of constructive control by runoff-partition of candidates in model TE in fallback elections in the IC model. The maximum is 20, 2 seconds.

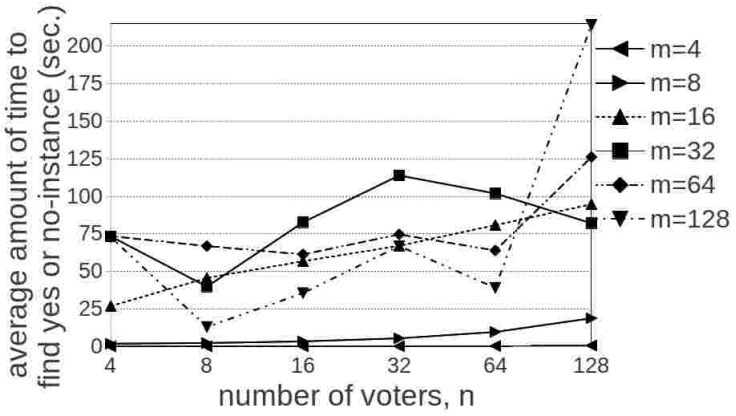


Figure 91: Average time the algorithm needs to give a definite output for constructive control by runoff-partition of candidates in model TE in fallback elections in the IC model. The maximum is 214, 19 seconds.

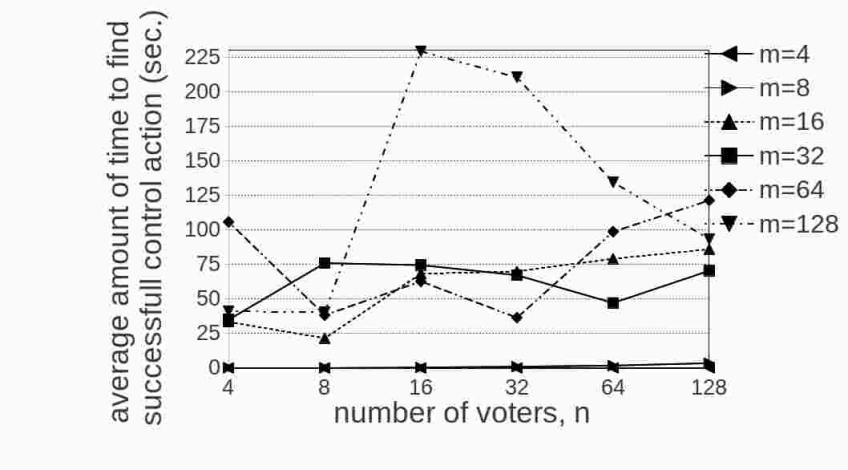


Figure 92: Average time the algorithm needs to find a successful control action for constructive control by runoff-partition of candidates in model TE in fallback elections in the TM model. The maximum is 229, 26 seconds.

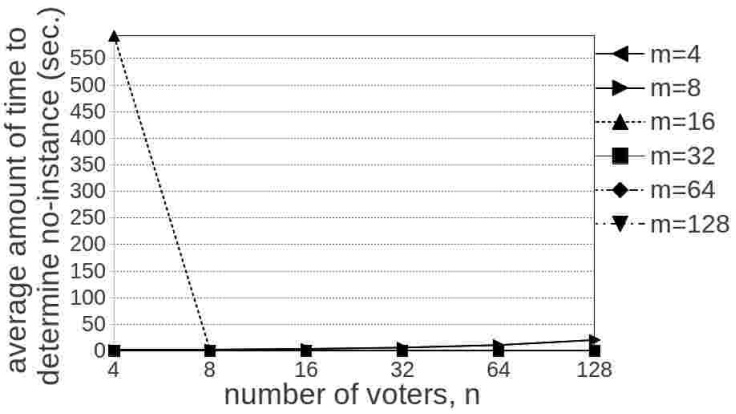


Figure 93: Average time the algorithm needs to determine no-instance of constructive control by runoff-partition of candidates in model TE in fallback elections in the TM model. The maximum is $592,3$ seconds.

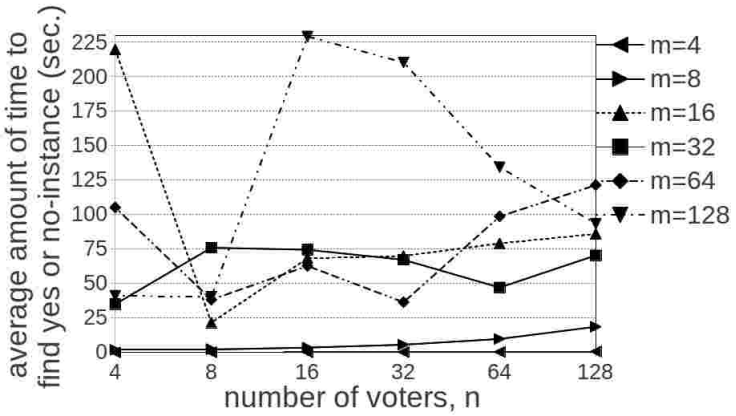


Figure 94: Average time the algorithm needs to give a definite output for constructive control by runoff-partition of candidates in model TE in fallback elections in the TM model. The maximum is $229,26$ seconds.

A.10. Destructive Control by Runoff Partition of Candidates in Model TE

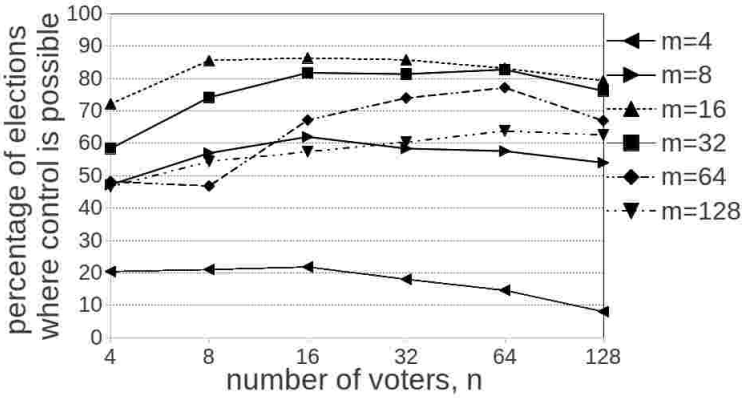


Figure 95: Results for fallback voting in the IC model for destructive control by runoff-partition of candidates in model TE. Number of candidates is fixed.

	$m=4$						$m=8$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	102	105	109	90	73	40	236	285	310	292	288	270
# ci	398	395	391	410	427	460	264	215	190	208	212	230
# to	0	0	0	0	0	0	0	0	0	0	0	0
	$m=16$						$m=32$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	361	428	432	429	416	397	292	371	409	407	414	381
# ci	9	0	0	0	0	0	1	0	0	0	0	0
# to	130	72	68	71	84	103	207	129	91	93	86	119
	$m=64$						$m=128$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	241	284	336	370	386	335	233	272	287	302	319	313
# ci	0	0	0	0	0	0	0	0	0	0	0	0
# to	259	216	164	130	114	165	267	228	213	198	181	187

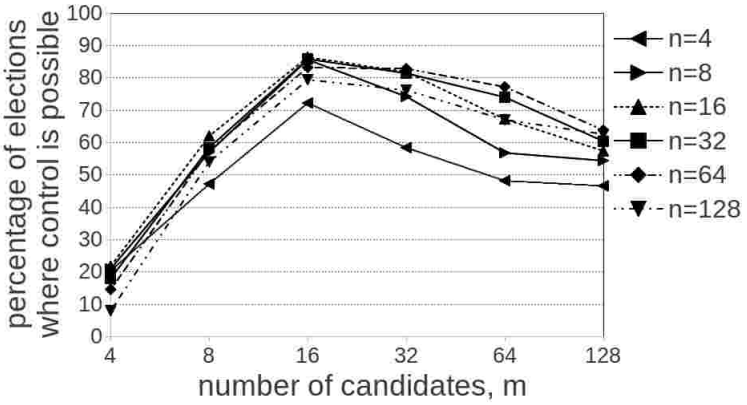


Figure 96: Results for fallback voting in the IC model for destructive control by runoff-partition of candidates in model TE. Number of voters is fixed.

	$n=4$						$n=8$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	102	236	361	292	241	233	105	285	428	371	284	272
# ci	398	264	9	1	0	0	395	215	0	0	0	0
# to	0	0	130	207	259	267	0	0	72	129	216	228
	$n=16$						$n=32$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	109	310	432	409	336	287	90	292	429	407	370	302
# ci	391	190	0	0	0	0	410	208	0	0	0	0
# to	0	0	68	91	164	213	0	0	71	93	130	198
	$n=64$						$n=128$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	73	288	416	414	386	319	40	270	397	381	335	313
# ci	427	212	0	0	0	0	460	230	0	0	0	0
# to	0	0	84	86	114	181	0	0	103	119	165	187

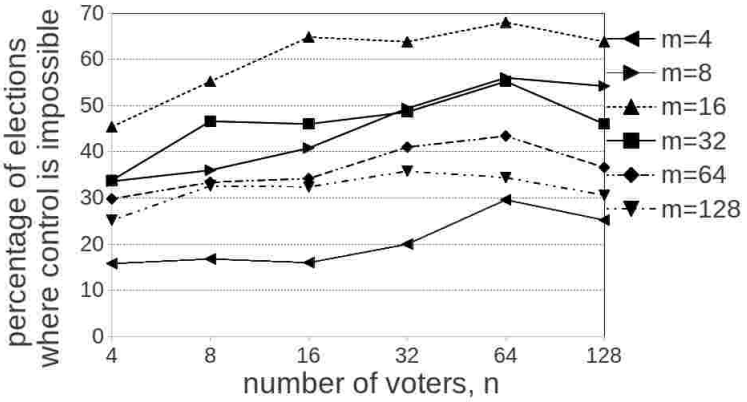


Figure 97: Results for fallback voting in the TM model for destructive control by runoff-partition of candidates in model TE. Number of candidates is fixed.

	$m=4$						$m=8$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	79	84	80	100	148	126	168	180	204	247	280	271
# ci	421	416	420	400	352	374	332	320	296	253	220	229
# to	0	0	0	0	0	0	0	0	0	0	0	0
	$m=16$						$m=32$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	227	276	324	319	340	319	169	233	230	243	276	230
# ci	159	137	83	56	30	29	153	104	81	34	21	15
# to	114	87	93	125	130	152	178	163	189	223	203	255
	$m=64$						$m=128$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	149	167	171	205	217	183	126	163	162	179	172	153
# ci	110	96	69	23	8	6	123	101	66	18	7	7
# to	241	237	260	272	275	311	251	236	272	303	321	340

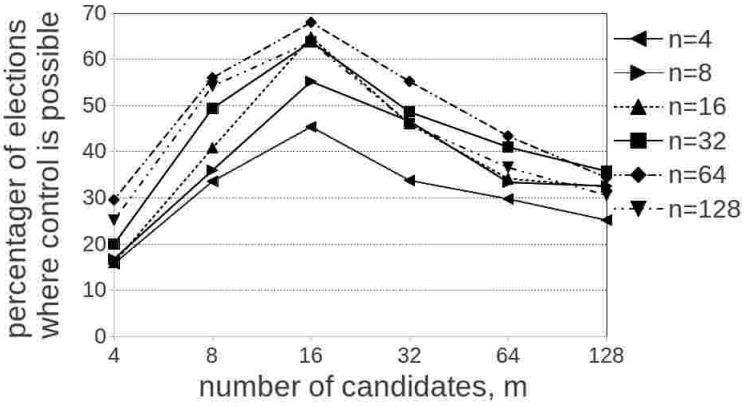


Figure 98: Results for fallback voting in the TM model for destructive control by runoff-partition of candidates in model TE. Number of voters is fixed.

	$n=4$						$n=8$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	79	168	227	169	149	126	84	180	276	233	167	163
# ci	421	332	159	153	110	123	416	320	137	104	96	101
# to	0	0	114	178	241	251	0	0	87	163	237	236
	$n=16$						$n=32$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	80	204	324	230	171	162	100	247	319	243	205	179
# ci	420	296	83	81	69	66	400	253	56	34	23	18
# to	0	0	93	189	260	272	0	0	125	223	272	303
	$n=64$						$n=128$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	148	280	340	276	217	172	126	271	319	230	183	153
# ci	352	220	30	21	8	7	374	374	6	15	6	7
# to	0	0	130	203	275	321	0	0	311	255	311	340

A.10.1. Computational Costs

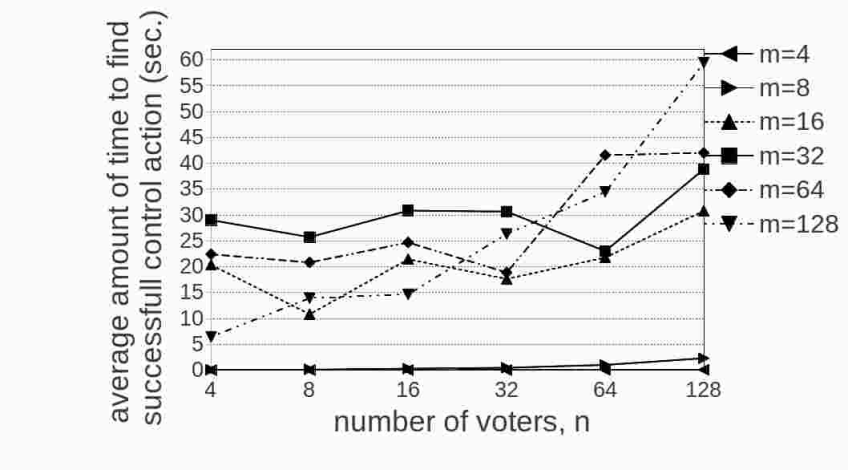


Figure 99: Average time the algorithm needs to find a successful control action for destructive control by runoff-partition of candidates in model TE in fallback elections in the IC model. The maximum is 59,44 seconds.

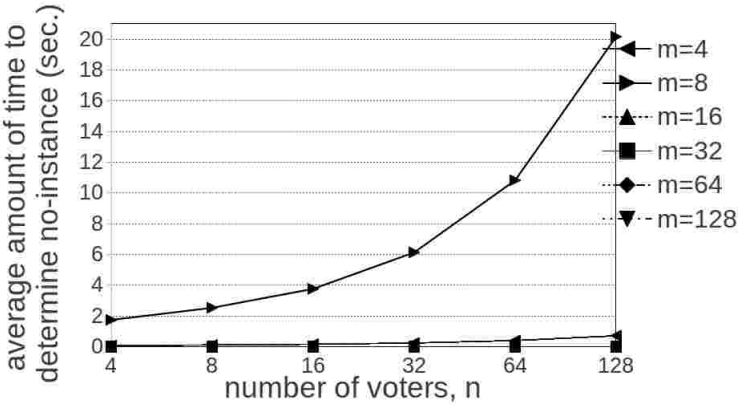


Figure 100: Average time the algorithm needs to determine no-instance of destructive control by runoff-partition of candidates in model TE in fallback elections in the IC model. The maximum is 20,16 seconds.

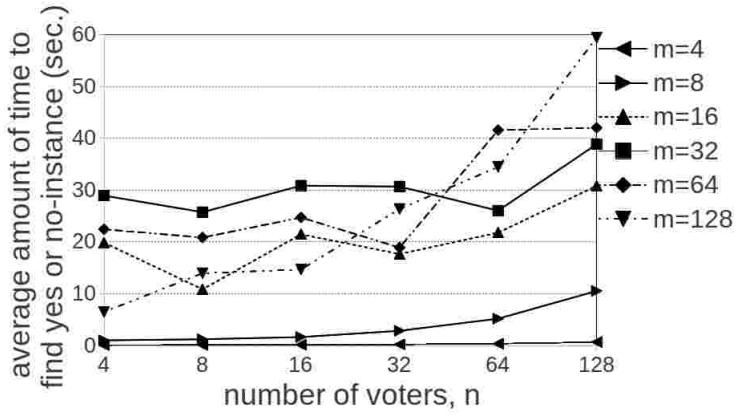


Figure 101: Average time the algorithm needs to give a definite output for destructive control by runoff-partition of candidates in model TE in fallback elections in the IC model. The maximum is $59,44$ seconds.

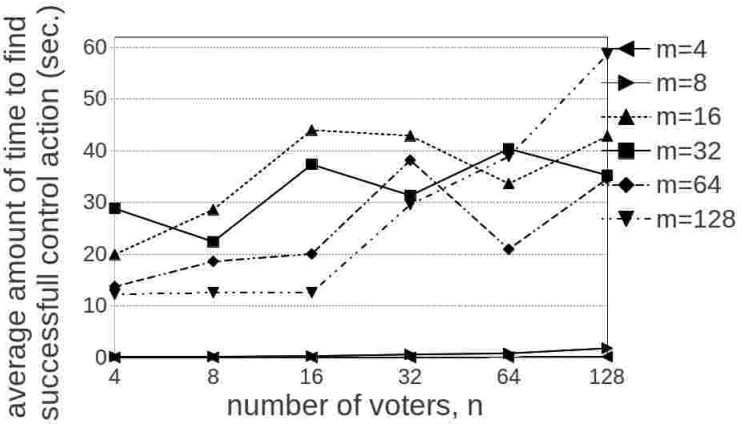


Figure 102: Average time the algorithm needs to find a successful control action for destructive control by runoff-partition of candidates in model TE in fallback elections in the TM model. The maximum is $58,6$ seconds.

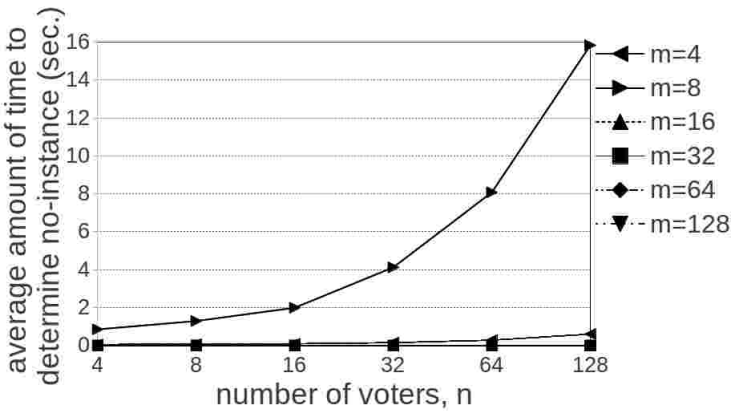


Figure 103: Average time the algorithm needs to determine no-instance of destructive control by runoff-partition of candidates in model TE in fallback elections in the TM model. The maximum is $15,84$ seconds.

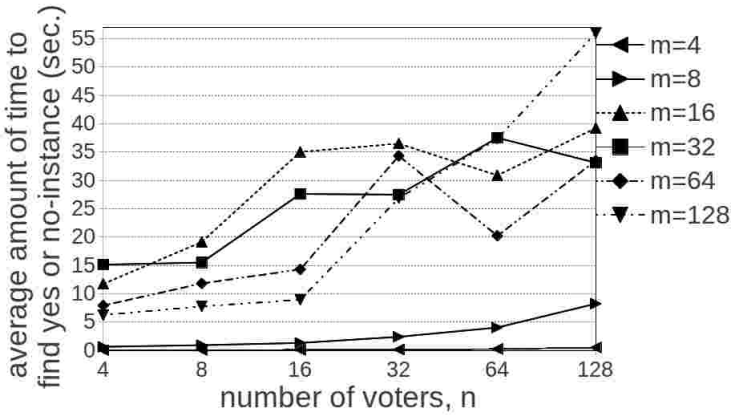


Figure 104: Average time the algorithm needs to give a definite output for destructive control by runoff-partition of candidates in model TE in fallback elections in the TM model. The maximum is $56,03$ seconds.

A.11. Constructive Control by Runoff Partition of Candidates in Model TP

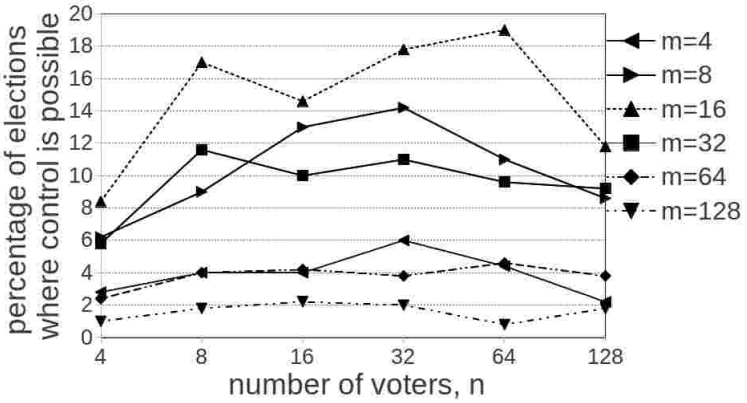


Figure 105: Results for fallback voting in the IC model for constructive control by runoff-partition of candidates in model TP. Number of candidates is fixed.

	$m=4$						$m=8$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	14	20	20	30	22	11	31	45	65	71	55	43
# ci	486	480	480	470	478	489	469	455	435	429	445	457
# to	0	0	0	0	0	0	0	0	0	0	0	0
	$m=16$						$m=32$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	42	85	73	89	95	59	29	58	50	55	48	46
# ci	0	0	0	0	0	0	0	0	0	0	0	0
# to	458	415	427	411	405	441	471	442	450	445	452	454
	$m=64$						$m=128$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	12	20	21	19	23	19	50	9	11	10	4	9
# ci	0	0	0	0	0	0	0	0	0	0	0	0
# to	488	480	479	481	477	481	495	491	489	490	496	491

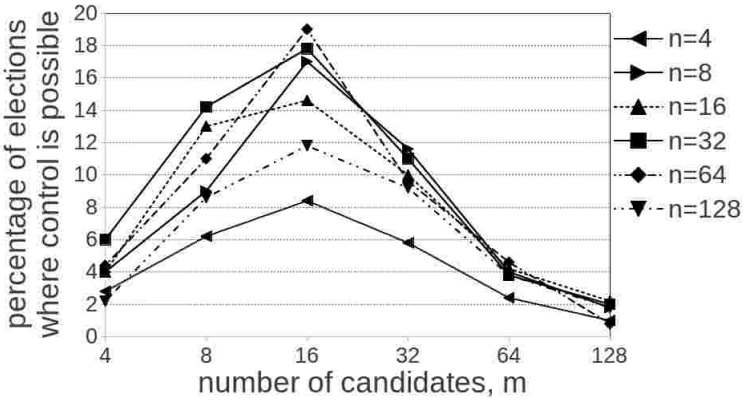


Figure 106: Results for fallback voting in the IC model for constructive control by runoff-partition of candidates in model TP. Number of voters is fixed.

	$n=4$						$n=8$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	140	31	42	29	12	5	20	45	85	58	20	9
# ci	486	469	0	0	0	0	480	455	0	0	0	0
# to	0	0	458	471	488	495	0	0	415	442	480	491
	$n=16$						$n=32$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	20	65	73	50	21	11	30	71	89	55	19	10
# ci	480	435	0	0	0	0	470	429	0	0	0	0
# to	0	0	427	450	479	489	0	0	411	445	481	490
	$n=64$						$n=128$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	22	55	95	48	23	4	11	43	59	46	19	9
# ci	478	445	0	0	0	0	489	457	0	0	0	0
# to	0	0	405	452	477	496	0	0	441	454	481	491

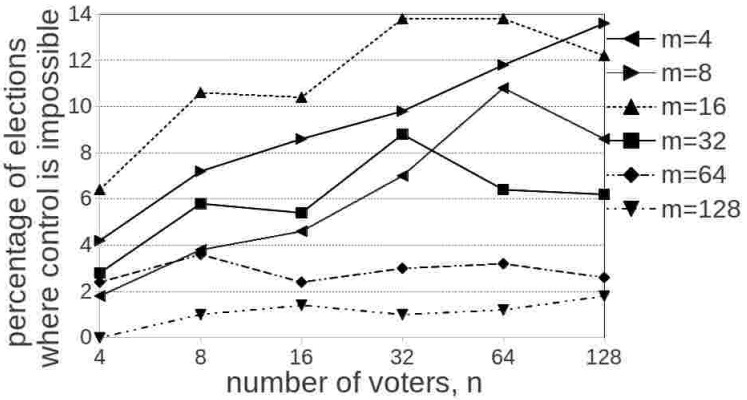


Figure 107: Results for fallback voting in the TM model for constructive control by runoff-partition of candidates in model TP. Number of candidates is fixed.

	$m=4$						$m=8$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	9	19	23	35	54	43	21	36	43	49	59	68
# ci	491	481	477	465	446	457	479	464	457	451	441	432
# to	0	0	0	0	0	0	0	0	0	0	0	0
	$m=16$						$m=32$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	32	53	52	69	69	61	14	29	27	44	32	31
# ci	23	0	0	0	0	0	0	0	0	0	0	0
# to	445	447	448	431	431	439	486	471	473	456	468	469
	$m=64$						$m=128$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	12	18	12	15	16	13	0	5	7	5	6	9
# ci	0	0	0	0	0	0	0	0	0	0	0	0
# to	488	482	488	485	484	487	500	495	493	495	494	491

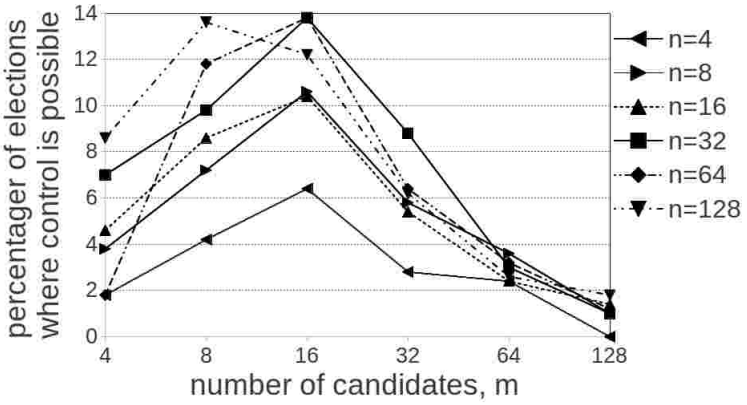


Figure 108: Results for fallback voting in the TM model for constructive control by runoff-partition of candidates in model TP. Number of voters is fixed.

	$n=4$						$n=8$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	9	21	32	14	12	0	19	36	53	29	18	5
# ci	491	479	23	0	0	0	481	464	0	0	0	0
# to	0	0	445	486	488	500	0	0	447	471	482	495
	$n=16$						$n=32$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	23	43	52	27	12	7	35	49	69	44	15	5
# ci	477	457	0	0	0	0	465	451	0	0	0	0
# to	0	0	448	473	488	493	0	0	431	456	485	495
	$n=64$						$n=128$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	54	59	69	32	16	6	43	68	61	31	13	9
# ci	446	441	0	0	0	0	457	432	0	0	0	0
# to	0	0	431	468	484	494	0	0	439	469	487	491

A.11.1. Computational Costs

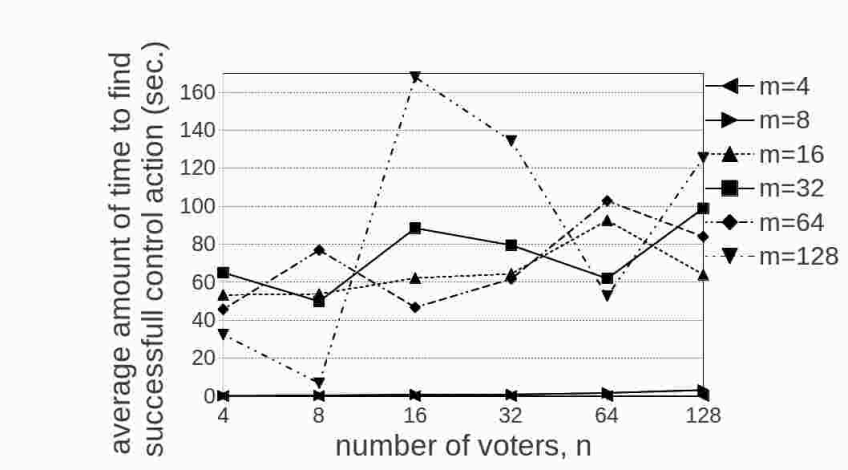


Figure 109: Average time the algorithm needs to find a successful control action for constructive control by runoff-partition of candidates in model TP in fallback elections in the IC model. The maximum is 168,02 seconds.

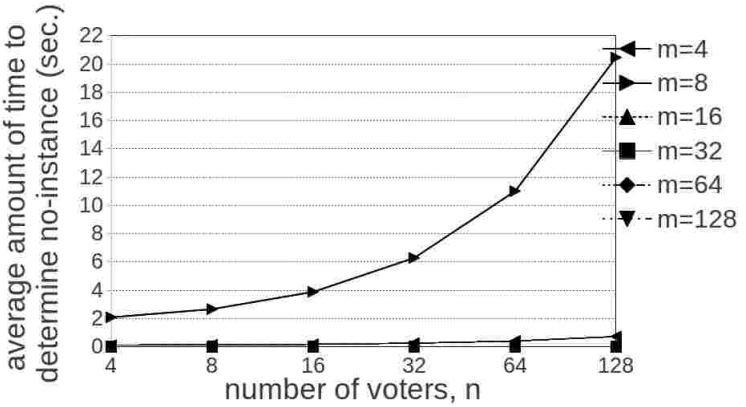


Figure 110: Average time the algorithm needs to determine no-instance of constructive control by runoff-partition of candidates in model TP in fallback elections in the IC model. The maximum is 20,47 seconds.

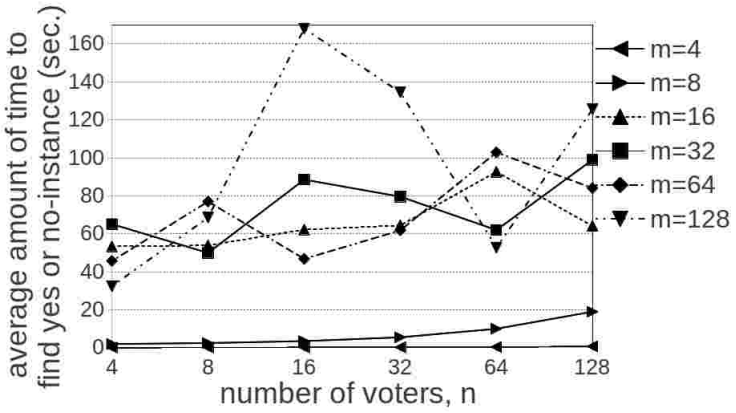


Figure 111: Average time the algorithm needs to give a definite output for constructive control by runoff-partition of candidates in model TP in fallback elections in the IC model. The maximum is 168,02 seconds.

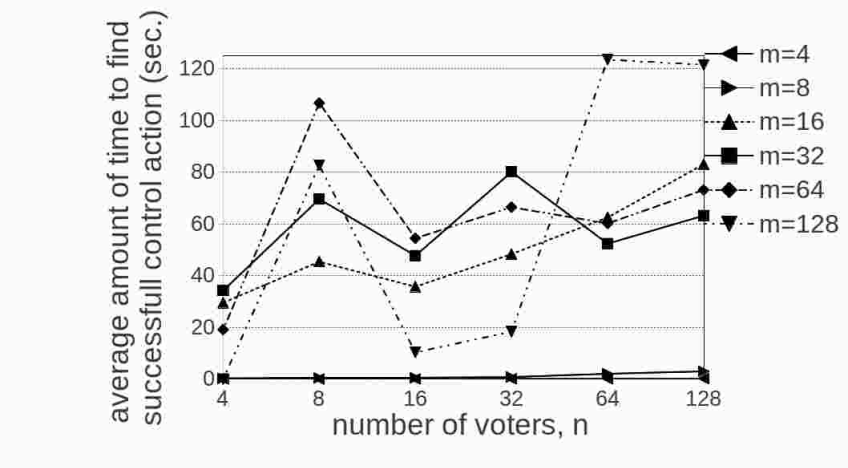


Figure 112: Average time the algorithm needs to find a successful control action for constructive control by runoff-partition of candidates in model TP in fallback elections in the TM model. The maximum is 123,59 seconds.

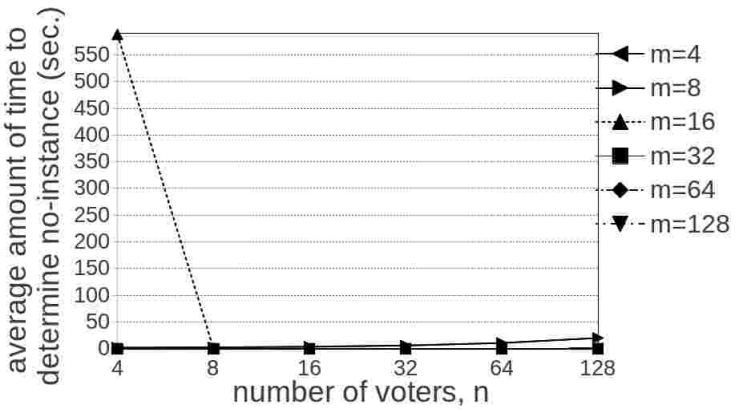


Figure 113: Average time the algorithm needs to determine no-instance of constructive control by runoff-partition of candidates in model TP in fallback elections in the TM model. The maximum is 587,95 seconds.

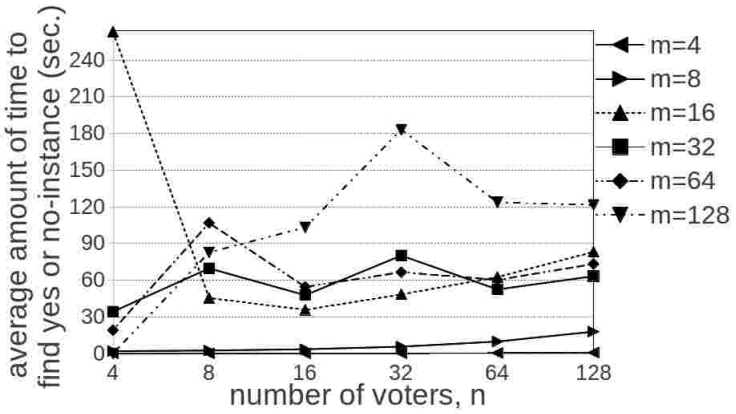


Figure 114: Average time the algorithm needs to give a definite output for constructive control by runoff-partition of candidates in model TP in fallback elections in the TM model. The maximum is 263,04 seconds.

A.12. Destructive Control by Runoff Partition of Candidates in Model TP

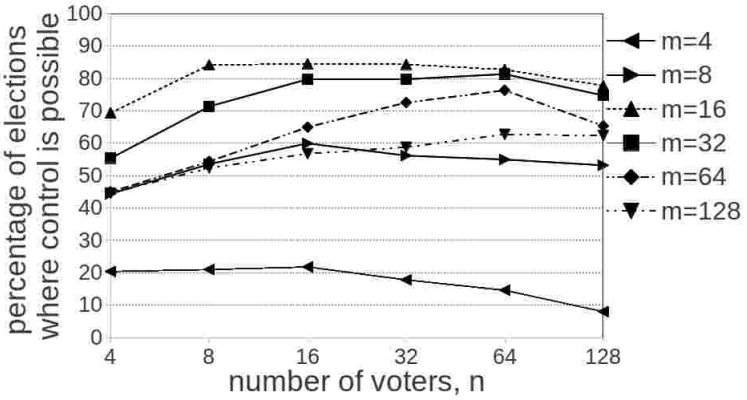


Figure 115: Results for fallback voting in the IC model for destructive control by runoff-partition of candidates in model TP. Number of candidates is fixed.

	$m=4$						$m=8$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	102	105	109	89	73	40	222	268	300	281	275	266
# ci	398	395	391	411	427	460	278	232	200	219	225	234
# to	0	0	0	0	0	0	0	0	0	0	0	0
	$m=16$						$m=32$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	347	421	423	422	414	389	277	357	399	399	407	374
# ci	9	0	0	0	0	0	1	0	0	0	0	0
# to	144	79	77	78	86	111	222	143	101	101	93	126
	$m=64$						$m=128$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	225	272	325	363	382	327	223	262	284	294	314	312
# ci	0	0	0	0	0	0	0	0	0	0	0	0
# to	275	228	175	137	118	173	277	238	216	206	186	188

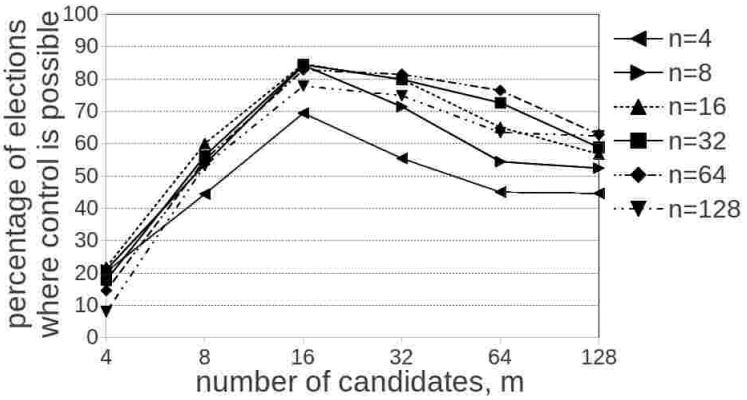


Figure 116: Results for fallback voting in the IC model for destructive control by runoff-partition of candidates in model TP. Number of voters is fixed.

	$n=4$						$n=8$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	102	222	347	277	225	223	105	268	421	357	272	262
# ci	398	278	9	1	0	0	395	232	0	0	0	0
# to	0	0	144	222	275	277	0	0	79	143	228	238
	$n=16$						$n=32$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	109	300	423	399	325	284	89	281	422	399	363	294
# ci	391	200	0	0	0	0	411	219	0	0	0	0
# to	0	0	77	101	175	216	0	0	78	101	137	206
	$n=64$						$n=128$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	73	275	414	407	382	314	40	266	389	374	327	312
# ci	427	225	0	0	0	0	460	234	0	0	0	0
# to	0	0	86	93	118	186	0	0	111	126	173	188

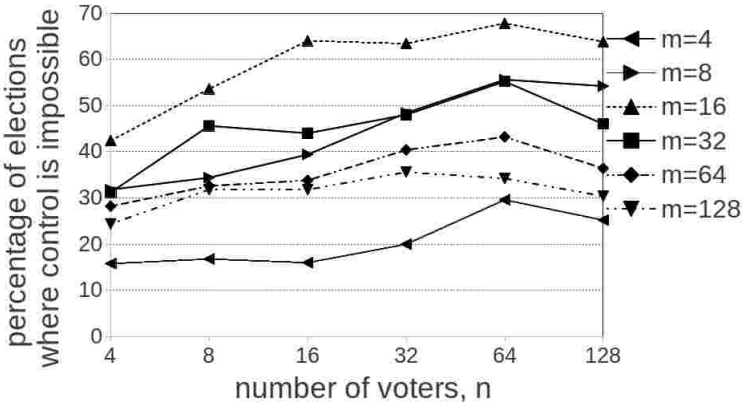


Figure 117: Results for fallback voting in the TM model for destructive control by runoff-partition of candidates in model TP. Number of candidates is fixed.

	$m=4$						$m=8$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	79	84	80	100	148	126	159	172	197	242	278	271
# ci	421	416	420	400	352	374	341	328	303	258	222	229
# to	0	0	0	0	0	0	0	0	0	0	0	0
	$m=16$						$m=32$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	212	268	320	317	339	319	156	228	220	240	276	230
# ci	159	137	83	56	30	29	153	104	81	34	21	15
# to	129	95	97	127	131	152	191	168	199	203	203	255
	$m=64$						$m=128$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	141	163	169	202	216	182	122	159	159	178	171	152
# ci	110	96	69	23	8	6	123	101	66	18	7	7
# to	249	241	262	275	276	312	255	240	275	304	322	341

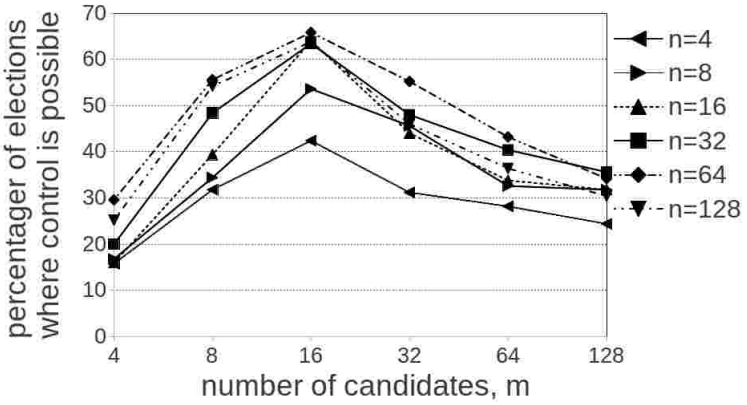


Figure 118: Results for fallback voting in the TM model for destructive control by runoff-partition of candidates in model TP. Number of voters is fixed.

	$n=4$						$n=8$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	79	159	212	156	141	122	84	172	268	228	163	159
# ci	421	341	159	153	110	123	416	328	137	104	96	101
# to	0	0	129	191	249	255	0	0	95	168	241	240
	$n=16$						$n=32$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	80	197	320	220	169	159	100	242	317	240	202	178
# ci	420	303	83	81	69	66	400	258	56	34	23	18
# to	0	0	97	199	262	275	0	0	127	226	275	304
	$n=64$						$n=128$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	148	278	339	276	216	171	126	271	319	230	182	152
# ci	352	222	30	21	8	7	374	229	29	15	6	7
# to	0	0	131	203	276	322	0	0	152	255	312	341

A.12.1. Computational Costs

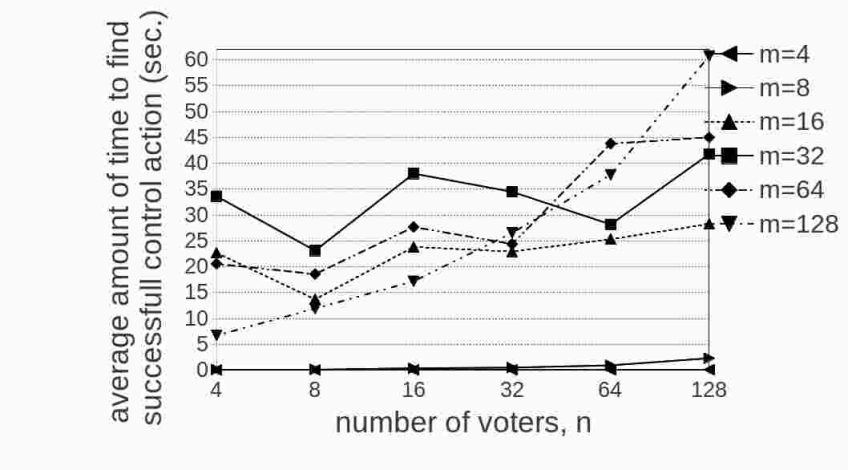


Figure 119: Average time the algorithm needs to find a successful control action for destructive control by runoff-partition of candidates in model TP in fallback elections in the IC model. The maximum is 60,76 seconds.

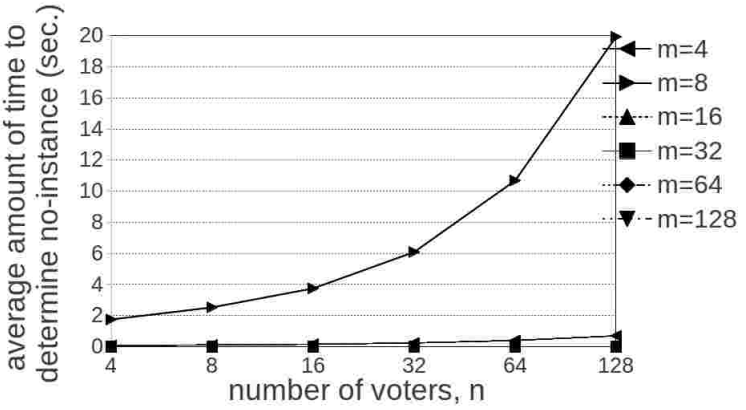


Figure 120: Average time the algorithm needs to determine no-instance of destructive control by runoff-partition of candidates in model TP in fallback elections in the IC model. The maximum is 19,94 seconds.

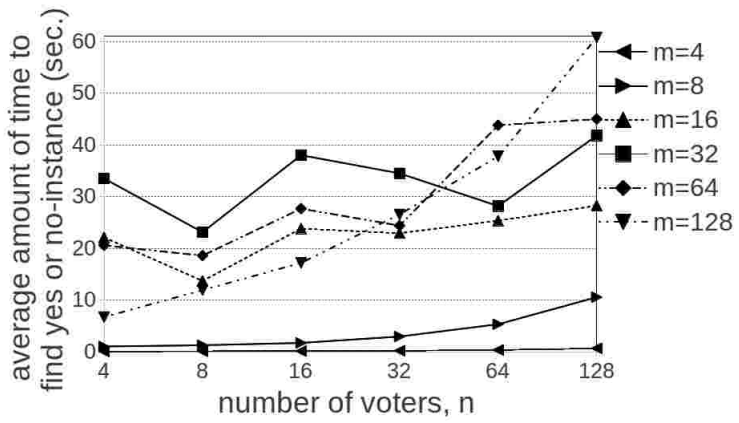


Figure 121: Average time the algorithm needs to give a definite output for destructive control by runoff-partition of candidates in model TP in fallback elections in the IC model. The maximum is $60,76$ seconds.

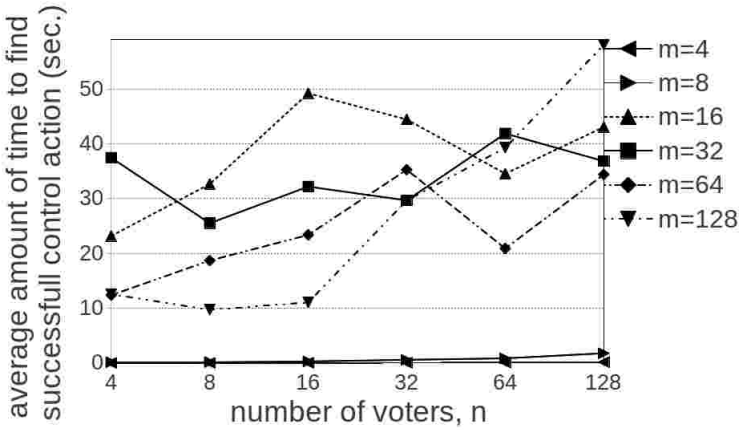


Figure 122: Average time the algorithm needs to find a successful control action for destructive control by runoff-partition of candidates in model TP in fallback elections in the TM model. The maximum is $58,04$ seconds.

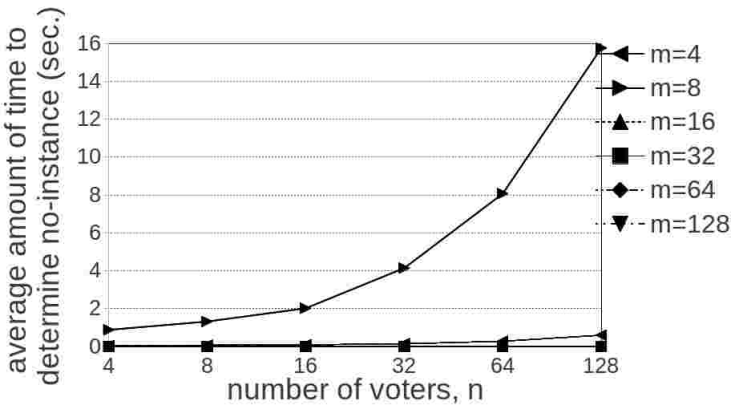


Figure 123: Average time the algorithm needs to determine no-instance of destructive control by runoff-partition of candidates in model TP in fallback elections in the TM model. The maximum is 15,75 seconds.

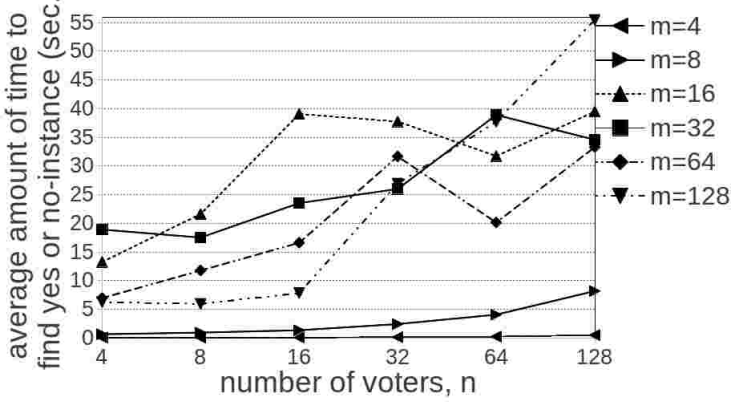


Figure 124: Average time the algorithm needs to give a definite output for destructive control by runoff-partition of candidates in model TP in fallback elections in the TM model. The maximum is 55,48 seconds.

A.13. Constructive Control by Adding Voters

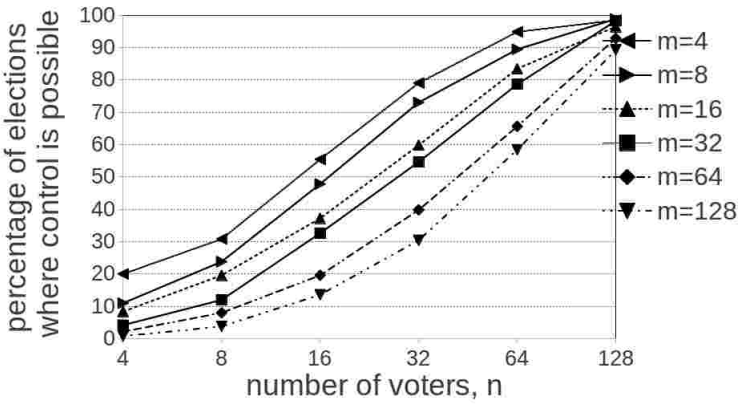


Figure 125: Results for fallback voting in the IC model for constructive control by adding voters. Number of candidates is fixed.

	$m=4$						$m=8$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	100	154	277	395	474	492	55	119	239	365	447	494
# ci	400	346	223	1	0	0	445	381	261	1	0	0
# to	0	0	0	104	26	8	0	0	0	134	53	6
	$m=16$						$m=32$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	42	98	186	299	417	482	21	60	163	273	393	491
# ci	458	402	314	2	0	0	479	440	337	12	0	0
# to	0	0	0	199	83	18	0	0	0	215	107	9
	$m=64$						$m=128$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	11	40	98	199	328	464	4	19	68	152	292	446
# ci	489	460	376	23	0	0	496	481	225	28	1	0
# to	0	0	26	278	172	36	0	0	207	320	207	54

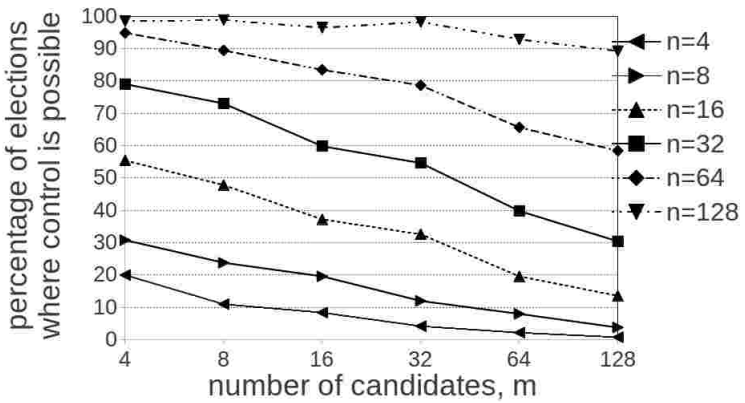


Figure 126: Results for fallback voting in the IC model for constructive control by adding voters. Number of voters is fixed.

	$n=4$						$n=8$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	100	55	42	21	11	4	154	119	98	60	40	19
# ci	400	445	458	479	479	496	346	381	402	440	460	481
# to	0	0	0	0	0	0	0	0	0	0	0	0
	$n=16$						$n=32$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	277	239	186	163	98	68	395	365	299	273	199	152
# ci	223	261	314	337	376	225	1	1	2	12	23	28
# to	0	0	0	0	26	207	104	134	199	215	278	320
	$n=64$						$n=128$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	474	447	417	393	328	292	492	494	482	491	464	446
# ci	0	0	0	0	0	1	0	0	0	0	0	0
# to	26	53	83	107	172	207	8	6	18	9	36	54

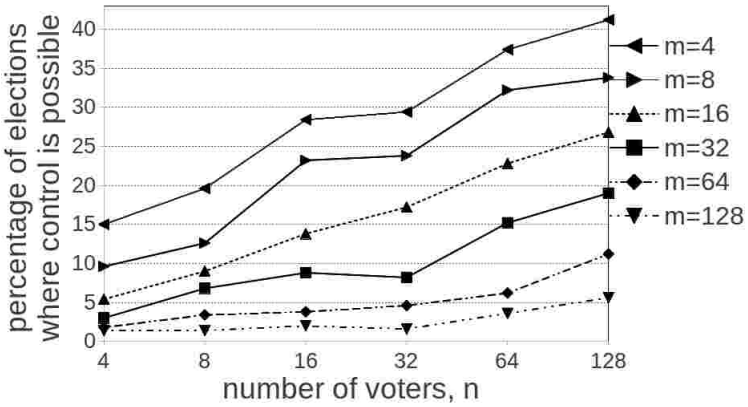


Figure 127: Results for fallback voting in the TM model for constructive control by adding voters. Number of candidates is fixed.

	$m=4$						$m=8$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	75	98	142	147	187	206	48	63	116	119	161	169
# ci	425	402	358	157	130	151	452	437	384	226	188	183
# to	0	0	0	196	183	143	0	0	0	155	151	148
	$m=16$						$m=32$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	27	45	69	86	114	134	15	34	44	41	76	95
# ci	473	455	432	291	282	266	485	466	347	350	327	319
# to	0	0	0	123	104	100	0	0	109	109	97	86
	$m=64$						$m=128$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	9	17	19	23	31	56	7	7	10	8	18	28
# ci	491	483	411	390	378	377	493	493	423	423	421	425
# to	0	0	70	87	91	67	0	0	67	69	61	47

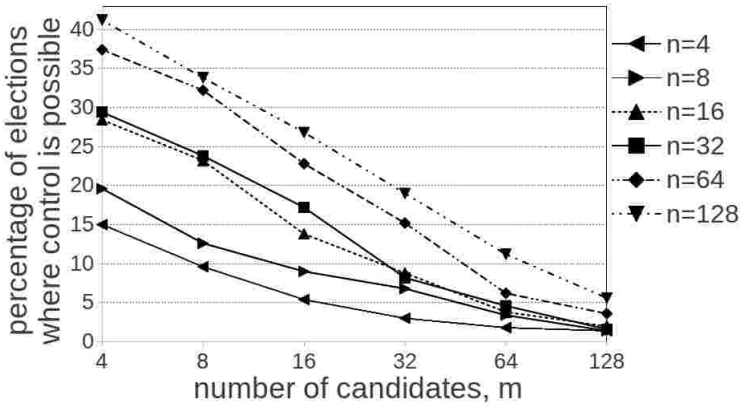


Figure 128: Results for fallback voting in the TM model for constructive control by adding voters. Number of voters is fixed.

	$n=4$						$n=8$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	75	48	27	15	9	7	98	63	45	34	17	7
# ci	425	452	473	485	491	493	402	437	455	466	483	493
# to	0	0	0	0	0	0	0	0	0	0	0	0
	$n=16$						$n=32$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	142	116	69	44	19	10	147	119	86	41	23	8
# ci	358	384	431	347	411	423	157	226	291	350	390	423
# to	0	0	0	109	70	67	196	155	123	109	87	69
	$n=64$						$n=128$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	187	161	114	76	31	18	206	169	134	95	56	28
# ci	130	188	282	327	378	421	151	183	266	319	377	425
# to	183	151	104	97	91	61	143	148	100	86	67	47

A.13.1. Computational Costs

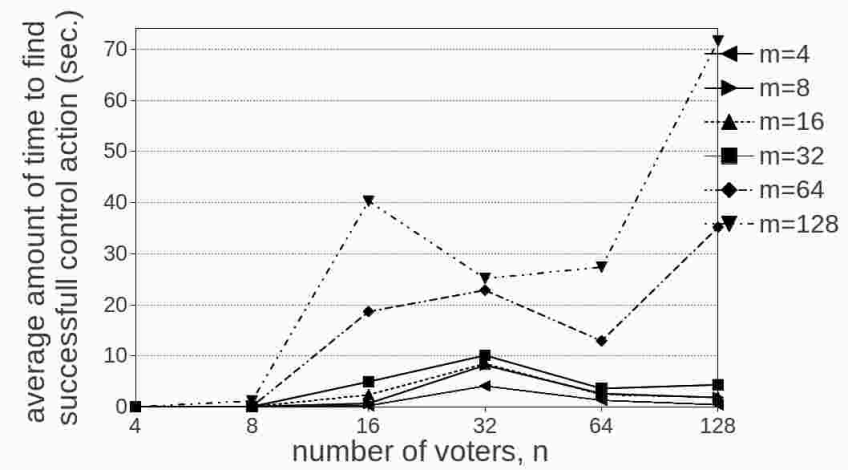


Figure 129: Average time the algorithm needs to find a successful control action for constructive control by adding voters in fallback elections in the IC model. The maximum is $71,62$ seconds.

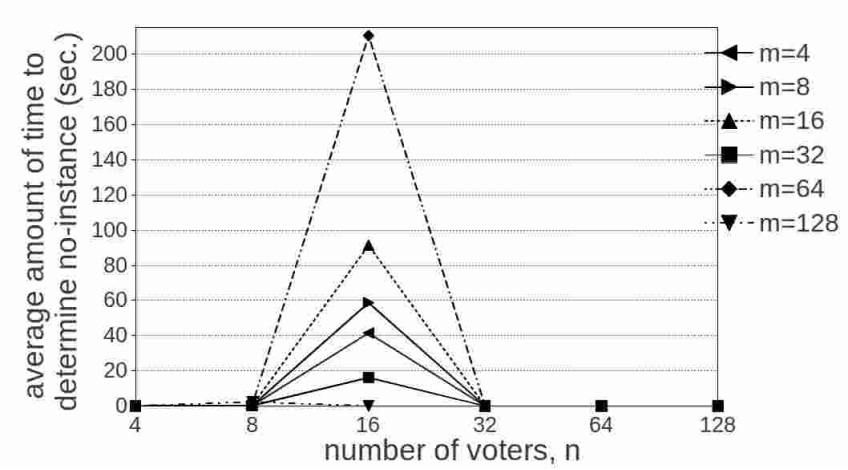


Figure 130: Average time the algorithm needs to determine no-instance of constructive control by adding voters in fallback elections in the IC model. The maximum is $210,51$ seconds.

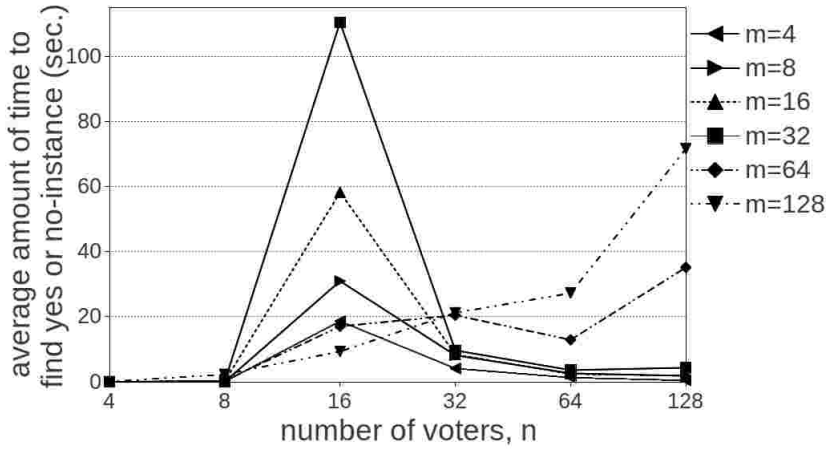


Figure 131: Average time the algorithm needs to give a definite output for constructive control by adding voters in fallback elections in the IC model. The maximum is $110,45$ seconds.

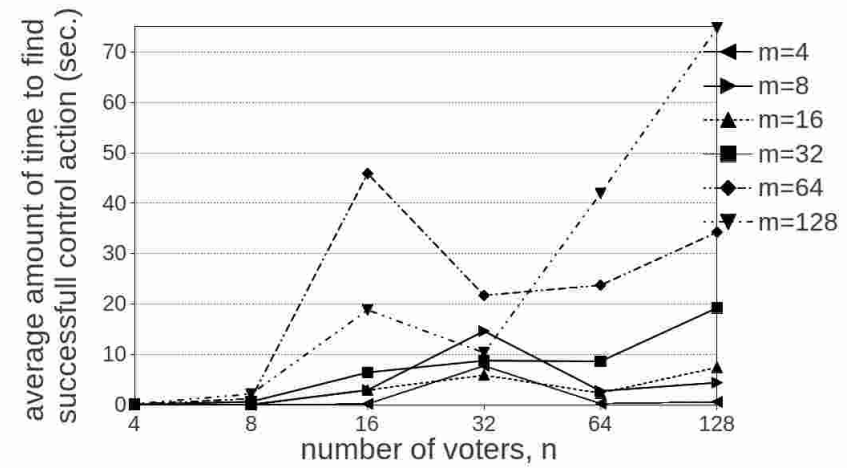


Figure 132: Average time the algorithm needs to find a successful control action for constructive control by adding voters in fallback elections in the TM model. The maximum is $74,8$ seconds.

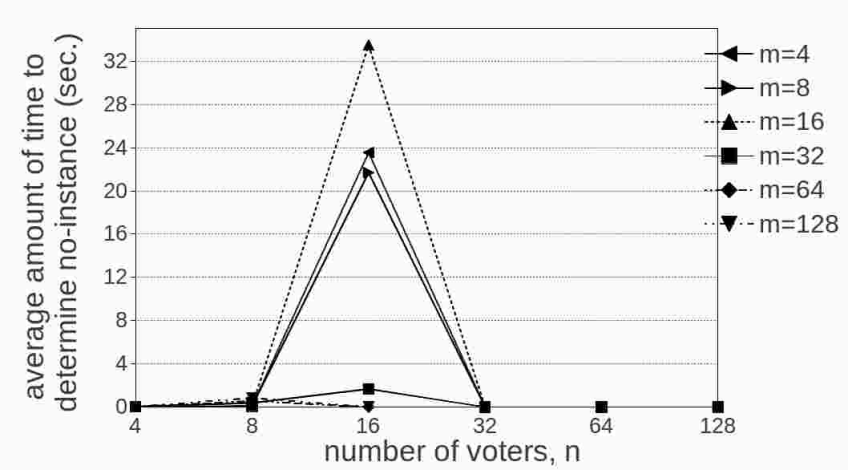


Figure 133: Average time the algorithm needs to determine no-instance of constructive control by adding voters in fallback elections in the TM model. The maximum is 233,48 seconds.

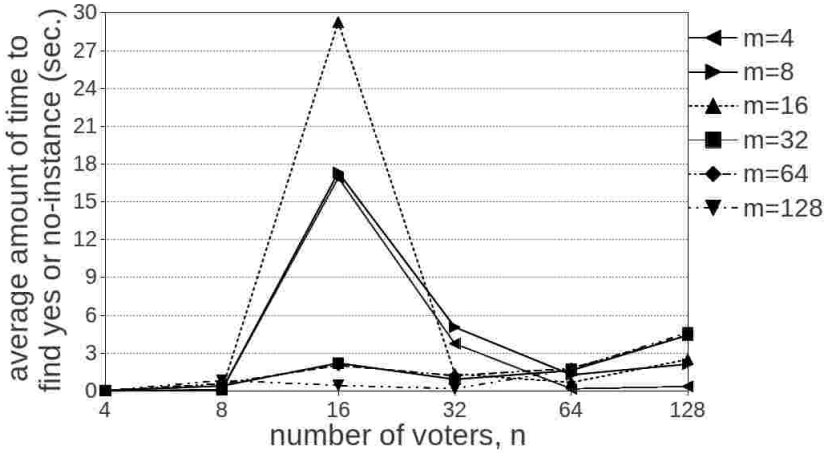


Figure 134: Average time the algorithm needs to give a definite output for constructive control by adding voters in fallback elections in the TM model. The maximum is 29,26 seconds.

A.14. Constructive Control by Deleting Voters

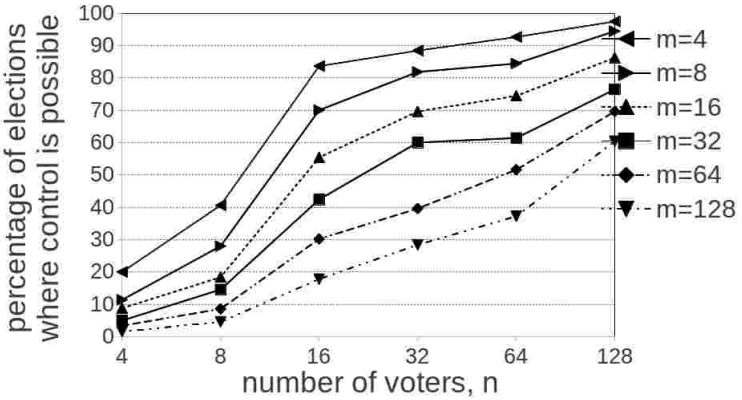


Figure 135: Results for fallback voting in the IC model for constructive control by deleting voters. Number of candidates is fixed.

	$m=4$						$m=8$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	100	203	418	442	463	487	57	140	350	409	422	472
# ci	400	297	82	0	0	0	443	360	150	2	0	0
# to	0	0	0	58	37	13	0	0	0	89	78	28
	$m=16$						$m=32$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	44	92	277	348	372	431	25	73	212	300	307	382
# ci	456	408	223	7	0	0	475	427	288	8	0	0
# to	0	0	0	145	128	69	0	0	0	192	193	118
	$m=64$						$m=128$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	17	43	151	198	258	348	8	23	89	142	186	302
# ci	483	457	349	29	0	0	492	477	193	42	1	0
# to	0	0	0	237	242	152	0	0	218	316	313	198

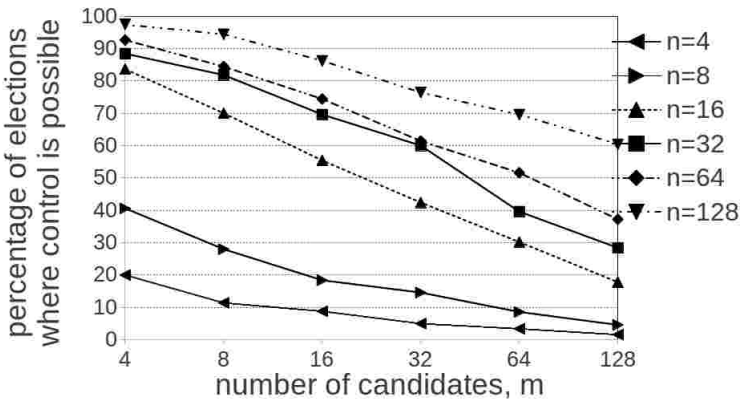


Figure 136: Results for fallback voting in the IC model for constructive control by deleting voters. Number of voters is fixed.

	$n=4$						$n=8$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	100	57	44	25	17	8	203	140	92	73	43	23
# ci	400	443	456	475	483	492	297	360	408	427	457	477
# to	0	0	0	0	0	0	0	0	0	0	0	0
	$n=16$						$n=32$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	418	350	277	212	151	89	442	409	348	300	198	142
# ci	82	150	223	288	349	193	0	2	7	8	29	42
# to	0	0	0	0	0	218	58	89	145	192	273	316
	$n=64$						$n=128$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	463	422	372	307	258	186	487	472	431	382	348	302
# ci	0	0	0	0	0	1	0	0	0	0	0	0
# to	37	78	128	193	242	313	13	28	69	118	152	198

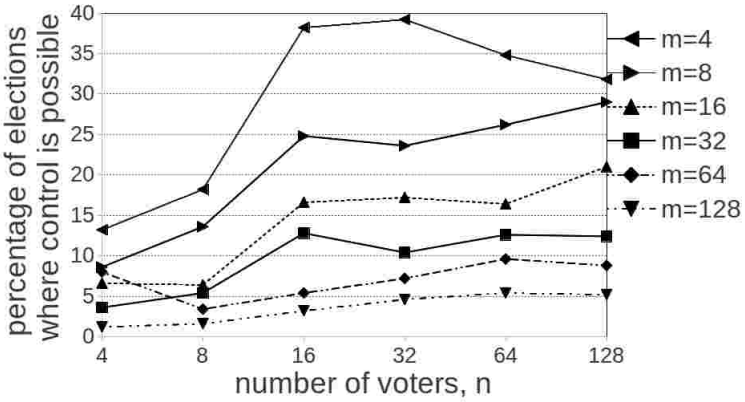


Figure 137: Results for fallback voting in the TM model for constructive control by deleting voters. Number of candidates is fixed.

	$m=4$						$m=8$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	66	91	191	196	174	159	43	68	124	118	131	145
# ci	434	409	309	135	132	133	457	432	376	241	219	210
# to	0	0	0	169	194	208	0	0	0	141	150	145
	$m=16$						$m=32$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	33	32	83	86	82	105	18	27	64	52	63	62
# ci	467	468	417	284	285	264	482	473	436	359	328	332
# to	0	0	0	130	133	131	0	0	0	89	109	106
	$m=64$						$m=128$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	4	17	27	36	48	44	6	8	16	23	27	26
# ci	496	483	473	384	383	388	494	492	473	415	425	415
# to	0	0	0	80	69	68	0	0	11	62	48	59

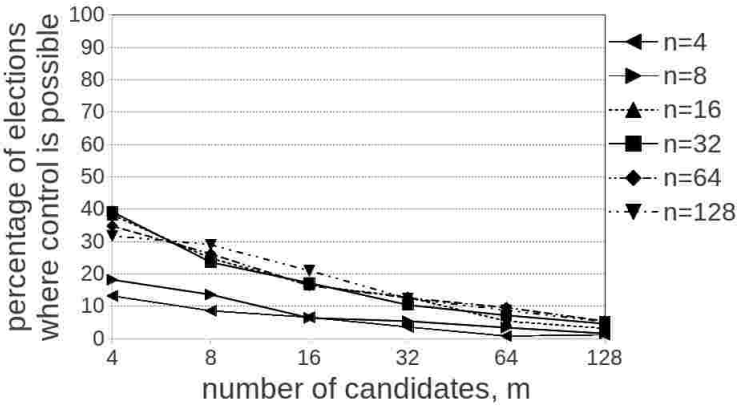


Figure 138: Results for fallback voting in the TM model for constructive control by deleting voters. Number of voters is fixed.

	$n=4$						$n=8$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	66	43	33	18	4	6	91	68	32	27	17	8
# ci	434	457	467	482	496	494	409	432	468	473	483	492
# to	0	0	0	0	0	0	0	0	0	0	0	0

	$n=16$						$n=32$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	191	124	83	64	27	16	196	118	86	52	36	23
# ci	309	376	417	436	473	473	135	241	284	359	384	415
# to	0	0	0	0	0	11	169	141	130	89	80	62

	$n=64$						$n=128$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	174	131	82	63	48	27	159	145	105	62	44	26
# ci	132	219	285	328	383	425	133	210	264	332	388	415
# to	194	150	133	109	69	48	208	145	131	106	68	59

A.14.1. Computational Costs

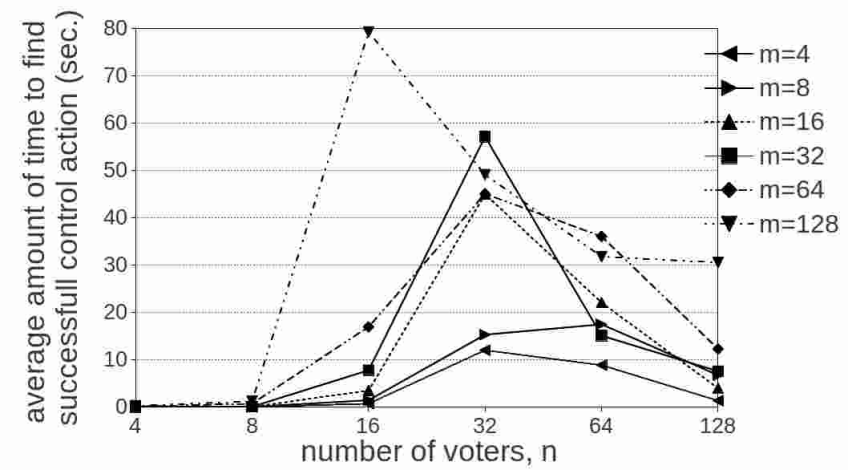


Figure 139: Average time the algorithm needs to find a successful control action for constructive control by deleting voters in fallback elections in the IC model. The maximum is 79,32 seconds.

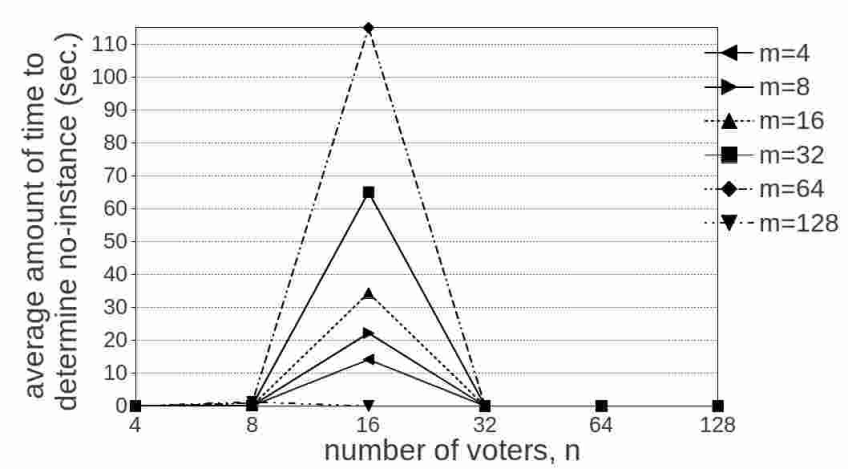


Figure 140: Average time the algorithm needs to determine no-instance of constructive control by deleting voters in fallback elections in the IC model. The maximum is 114,99 seconds.

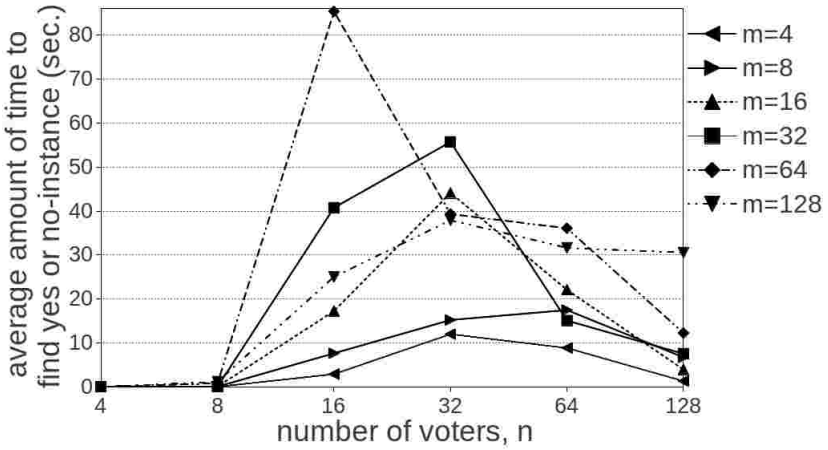


Figure 141: Average time the algorithm needs to give a definite output for constructive control by deleting voters in fallback elections in the IC model. The maximum is $88,57$ seconds.

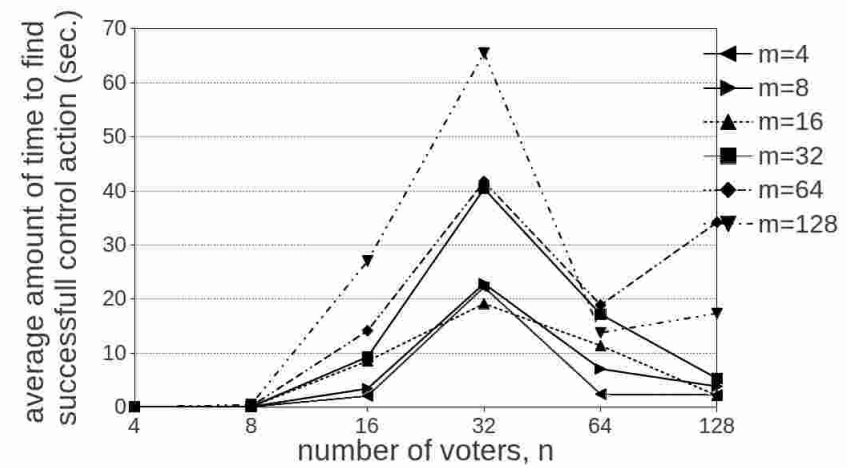


Figure 142: Average time the algorithm needs to find a successful control action for constructive control by deleting voters in fallback elections in the TM model. The maximum is $65,48$ seconds.

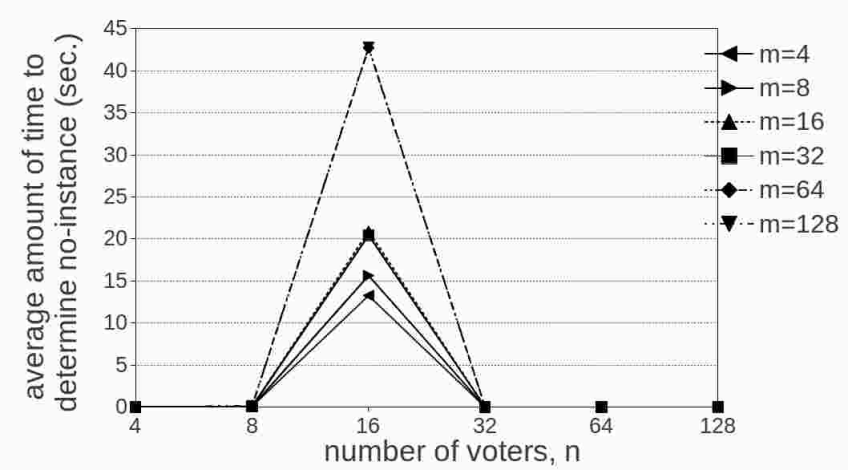


Figure 143: Average time the algorithm needs to determine no-instance of constructive control by deleting voters in fallback elections in the TM model. The maximum is 42,8 seconds.

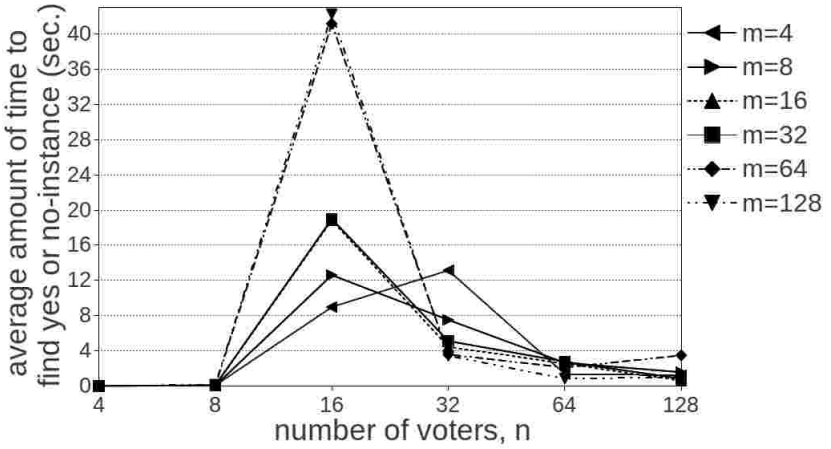


Figure 144: Average time the algorithm needs to give a definite output for constructive control by deleting voters in fallback elections in the TM model. The maximum is 42,28 seconds.

A.15. Constructive Control by Partition of Voters in Model TE

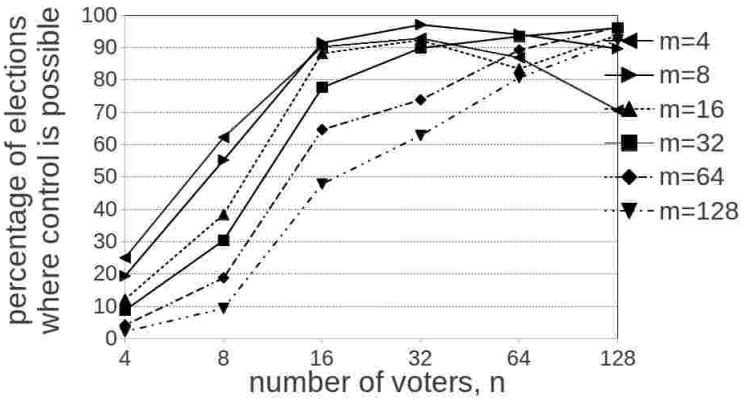


Figure 145: Results for fallback voting in the IC model for constructive control by partition of voters in model TE. Number of candidates is fixed.

	$m=4$						$m=8$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	125	311	451	464	434	353	97	276	457	485	470	448
# ci	375	189	49	0	0	0	403	224	43	0	0	0
# to	0	0	0	36	66	147	0	0	0	15	30	52
	$m=16$						$m=32$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	61	192	441	461	417	469	44	152	388	449	467	480
# ci	439	308	1	0	0	0	456	348	0	0	0	0
# to	0	0	58	39	29	31	0	0	112	51	33	20
	$m=64$						$m=128$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	21	94	323	369	446	481	11	47	239	314	403	461
# ci	479	406	0	0	0	0	489	453	0	0	0	0
# to	0	0	177	131	54	19	0	0	261	186	97	39

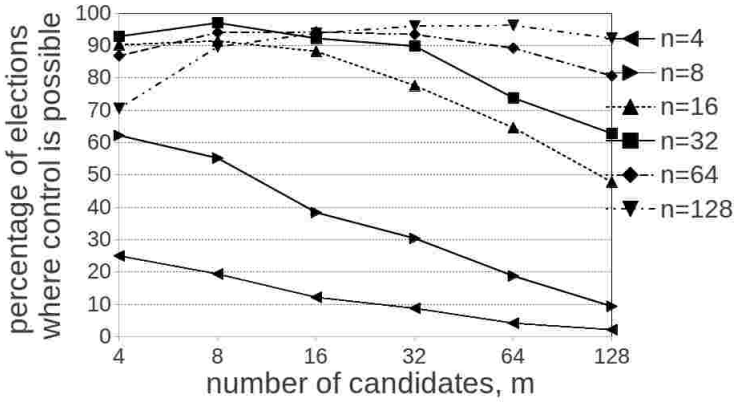


Figure 146: Results for fallback voting in the IC model for constructive control by partition of voters in model TE. Number of voters is fixed.

	$n=4$						$n=8$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	125	97	61	44	21	11	311	276	192	152	94	47
# ci	375	403	439	456	479	489	189	224	308	348	406	453
# to	0	0	0	0	0	0	0	0	0	0	0	0
	$n=16$						$n=32$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	451	457	441	388	323	239	464	485	461	449	369	314
# ci	49	43	1	0	0	0	0	0	0	0	0	0
# to	0	0	58	112	177	261	36	15	39	51	131	186
	$n=64$						$n=128$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	434	470	471	467	446	403	353	448	469	480	481	461
# ci	0	0	0	0	0	0	0	0	0	0	0	0
# to	66	30	29	33	54	97	147	52	31	20	19	39

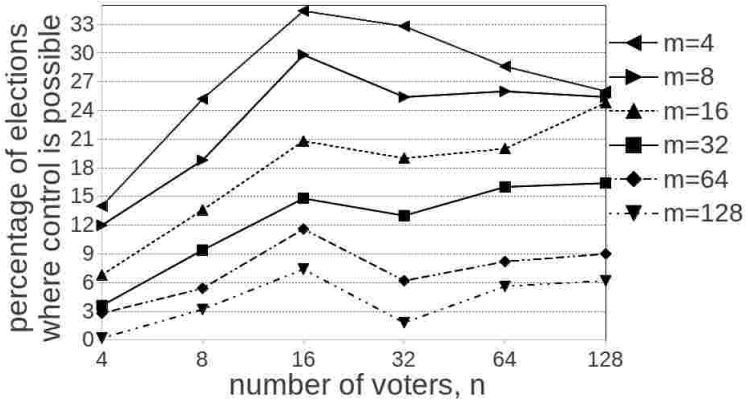


Figure 147: Results for fallback voting in the TM model for constructive control by partition of voters in model TE. Number of candidates is fixed.

	$m=4$						$m=8$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	70	126	172	164	143	130	60	94	149	127	130	127
# ci	430	374	328	111	97	82	440	406	351	95	55	49
# to	0	0	0	225	260	288	0	0	0	278	315	324
	$m=16$						$m=32$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	34	68	104	95	100	124	18	47	74	65	80	82
# ci	466	432	136	51	40	26	482	453	72	32	22	14
# to	0	0	260	354	360	350	0	0	354	403	398	404
	$m=64$						$m=128$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	14	27	58	31	41	45	1	16	37	9	28	31
# ci	486	473	63	29	8	7	499	484	56	23	10	2
# to	0	0	379	440	451	448	0	0	407	468	462	467

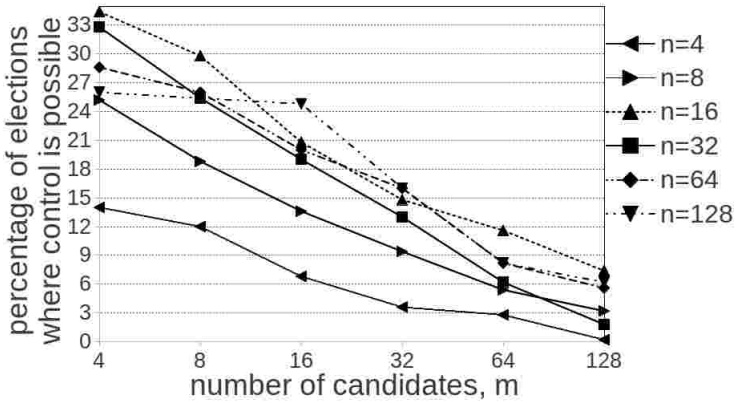


Figure 148: Results for fallback voting in the TM model for constructive control by partition of voters in model TE. Number of voters is fixed.

	$n=4$						$n=8$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	70	60	34	18	14	1	126	94	68	47	27	16
# ci	430	440	466	482	486	499	374	406	432	453	472	484
# to	0	0	0	0	0	0	0	0	0	0	0	0
	$n=16$						$n=32$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	172	149	104	74	58	37	164	127	95	65	31	9
# ci	328	351	136	72	63	56	111	95	51	32	29	23
# to	0	0	260	354	379	407	225	278	354	403	440	468
	$n=64$						$n=128$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	143	130	100	80	41	28	130	127	124	80	41	31
# ci	97	55	40	22	8	10	82	49	26	22	10	2
# to	260	315	360	398	451	462	288	324	350	398	462	467

A.15.1. Computational Costs

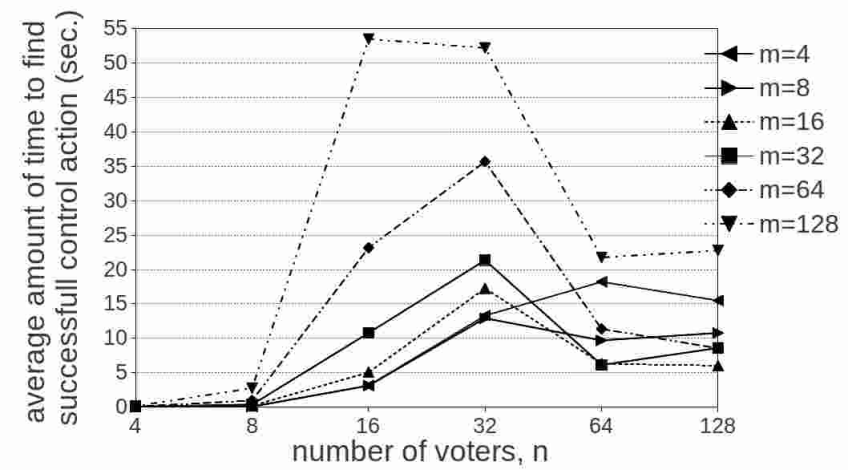


Figure 149: Average time the algorithm needs to find a successful control action for constructive control by partition of voters in model TE in fallback elections in the IC model. The maximum is $53,51$ seconds.

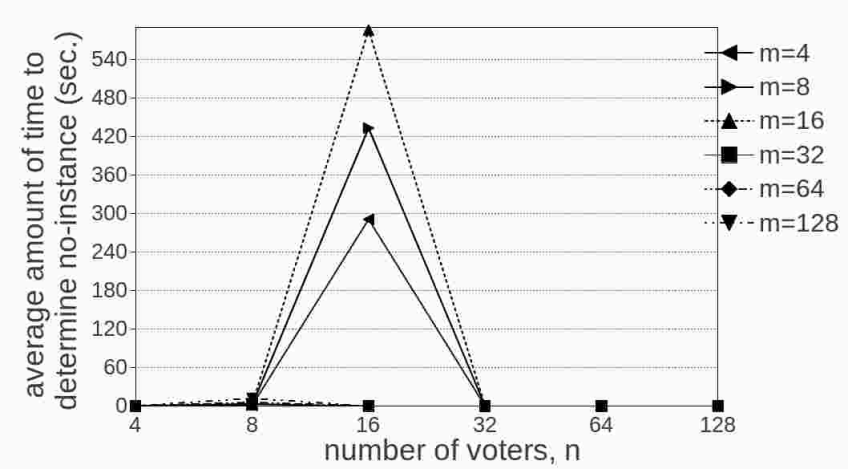


Figure 150: Average time the algorithm needs to determine no-instance of constructive control by partition of voters in model TE in fallback elections in the IC model. The maximum is $586,56$ seconds.

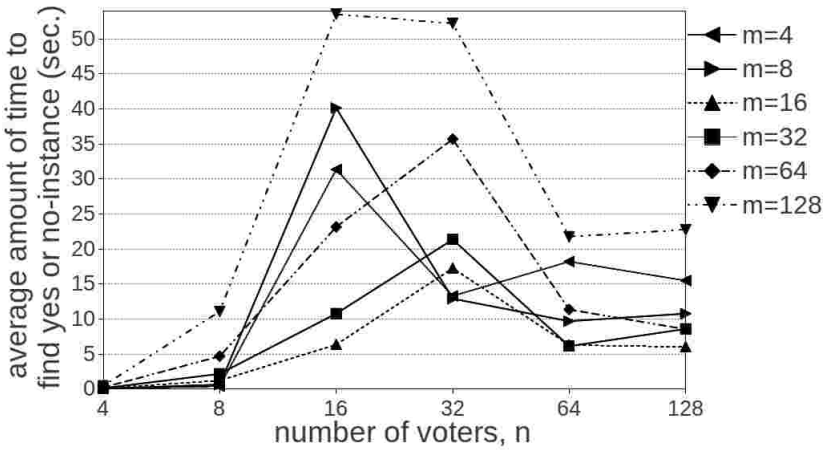


Figure 151: Average time the algorithm needs to give a definite output for constructive control by adding voters in fallback elections in the IC model. The maximum is 53,51 seconds.

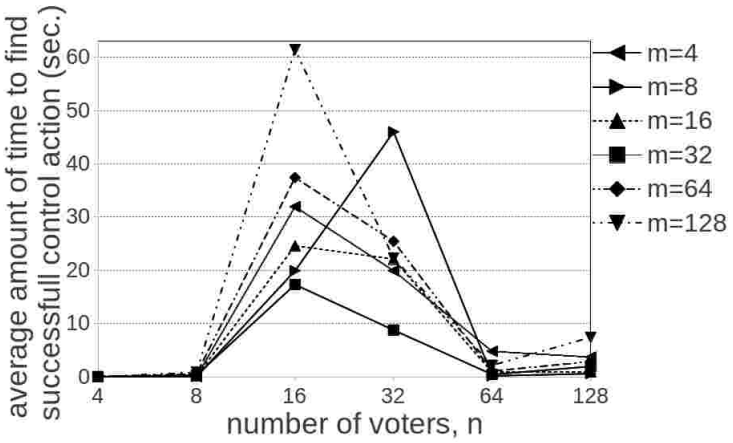


Figure 152: Average time the algorithm needs to find a successful control action for constructive control by partition of voters in model TE in fallback elections in the TM model. The maximum is 61,41 seconds.

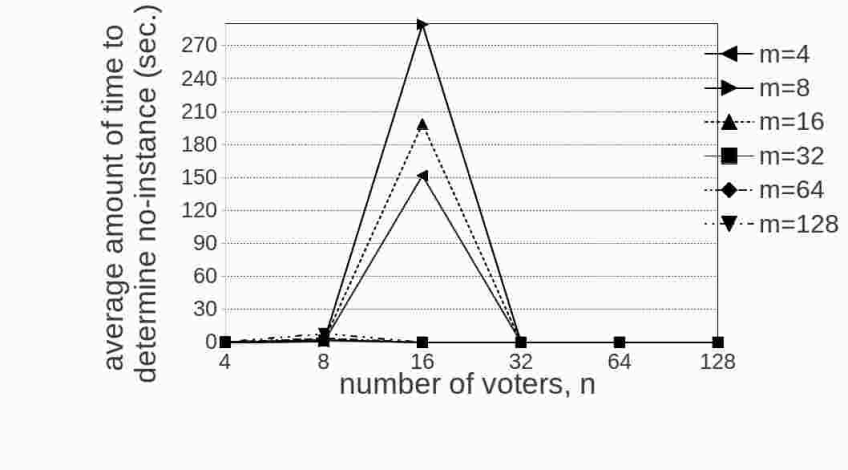


Figure 153: Average time the algorithm needs to determine no-instance of constructive control by partition of voters in model TE in fallback elections in the TM model. The maximum is 289,18 seconds.

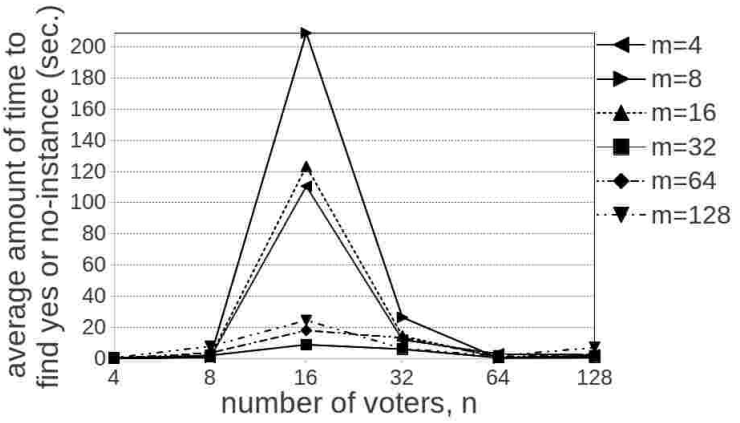


Figure 154: Average time the algorithm needs to give a definite output for constructive control by partition of voters in model TE in fallback elections in the TM model. The maximum is 208,95 seconds.

A.16. Destructive Control by Partition of Voters in Model TE

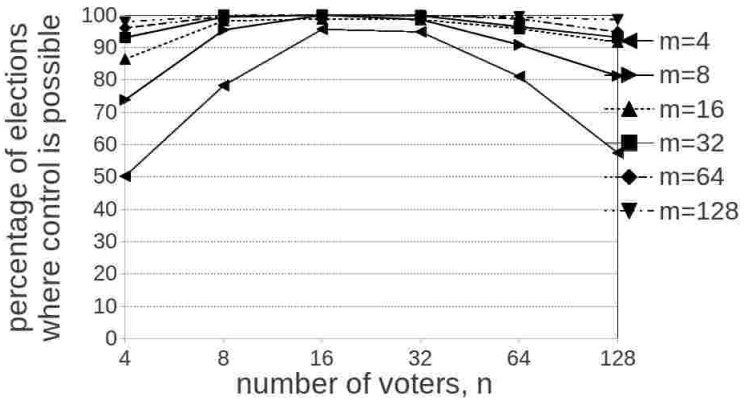


Figure 155: Results for fallback voting in the IC model for destructive control by partition of voters in model TE. Number of candidates is fixed.

	$m=4$						$m=8$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	251	391	478	474	405	287	369	477	500	493	454	406
# ci	249	109	22	0	0	0	131	23	0	0	0	0
# to	0	0	0	26	95	213	0	0	0	7	46	94
	$m=16$						$m=32$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	432	491	499	498	479	458	465	497	500	499	482	466
# ci	68	9	1	0	0	0	35	3	0	0	0	0
# to	0	0	0	2	21	42	0	0	0	1	18	34
	$m=64$						$m=128$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	480	498	500	500	494	474	489	500	500	499	497	493
# ci	20	2	0	0	0	0	11	0	0	0	0	0
# to	0	0	0	0	6	26	0	0	0	1	3	7

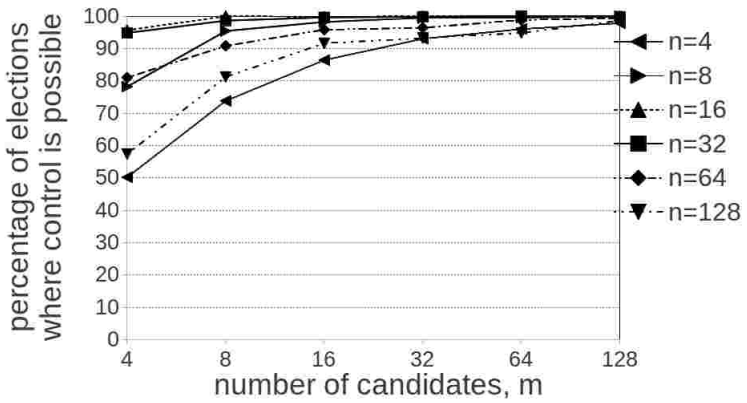


Figure 156: Results for fallback voting in the IC model for destructive control by partition of voters in model TE. Number of voters is fixed.

	$n=4$						$n=8$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	251	369	432	465	480	489	391	477	491	497	498	500
# ci	249	131	68	35	20	11	109	23	9	3	2	0
# to	0	0	0	0	0	0	0	0	0	0	0	0
	$n=16$						$n=32$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	478	500	499	500	500	500	474	493	498	499	500	499
# ci	22	0	1	0	0	0	0	0	0	0	0	0
# to	0	0	0	0	0	0	26	7	2	1	0	1
	$n=64$						$n=128$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	405	454	479	482	494	497	287	406	458	466	474	493
# ci	0	0	0	0	0	0	0	0	0	0	0	0
# to	95	46	21	18	6	3	213	94	42	34	26	7

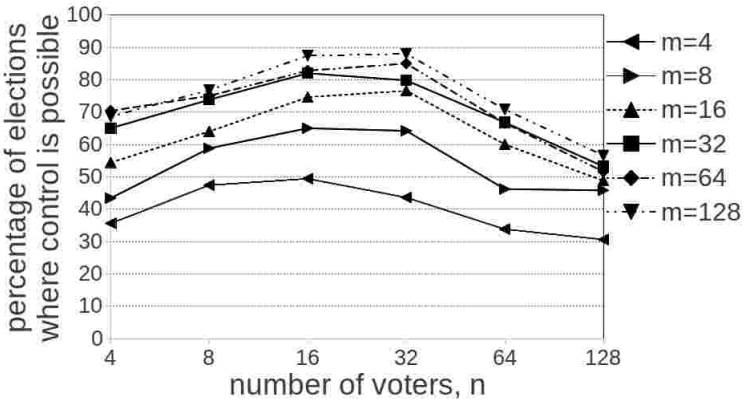


Figure 157: Results for fallback voting in the TM model for destructive control by partition of voters in model TE. Number of candidates is fixed.

	$m=4$						$m=8$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	178	237	247	218	169	153	217	294	325	321	231	229
# ci	322	263	253	132	95	79	283	206	175	86	64	49
# to	0	0	0	150	236	268	0	0	0	93	205	222

	$m=16$						$m=32$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	272	320	373	383	300	244	325	369	410	399	334	266
# ci	228	180	110	48	41	35	175	131	63	35	16	17
# to	0	0	17	69	159	221	0	0	27	66	150	217

	$m=64$						$m=128$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	352	375	414	425	333	258	343	384	437	440	354	283
# ci	148	125	64	23	10	11	157	116	46	31	3	5
# to	0	0	0	52	157	231	0	0	17	29	143	212

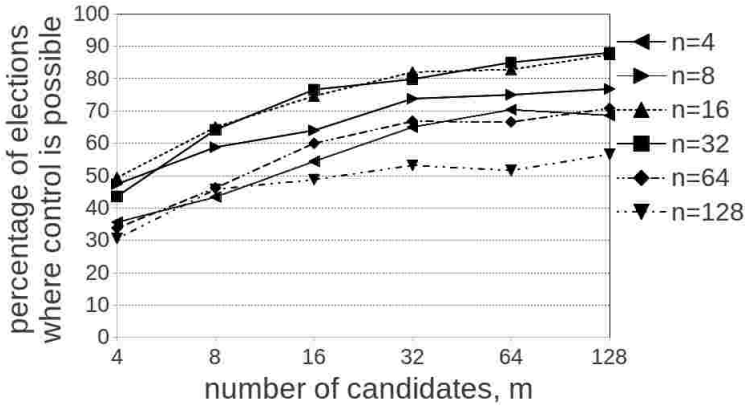


Figure 158: Results for fallback voting in the TM model for destructive control by partition of voters in model TE. Number of voters is fixed.

	$n=4$						$n=8$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	178	217	272	325	352	343	237	294	320	369	375	384
# ci	322	283	228	175	148	157	263	206	180	131	125	116
# to	0	0	0	0	0	0	0	0	0	0	0	0
	$n=16$						$n=32$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	247	325	373	410	414	437	218	321	383	399	425	440
# ci	253	175	110	63	64	46	132	86	48	35	23	31
# to	0	0	17	27	22	17	150	93	69	66	52	29
	$n=64$						$n=128$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	169	231	300	334	333	354	153	229	244	266	258	283
# ci	95	64	41	16	10	3	79	49	35	17	11	5
# to	236	205	159	150	157	143	268	222	221	217	231	212

A.16.1. Computational Costs

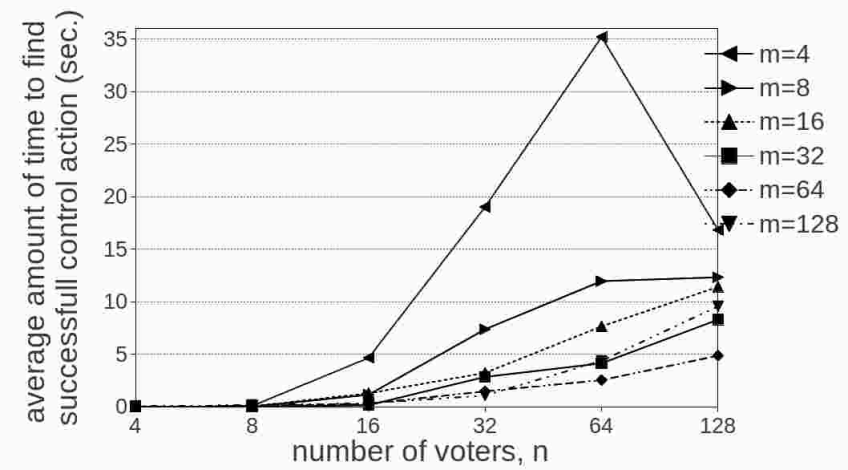


Figure 159: Average time the algorithm needs to find a successful control action for destructive control by partition of voters in model TE in fallback elections in the IC model. The maximum is $35,22$ seconds.

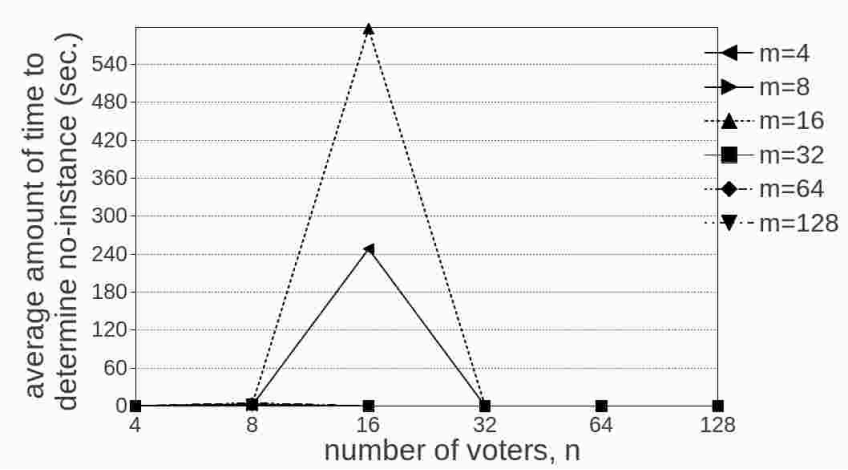


Figure 160: Average time the algorithm needs to determine no-instance of destructive control by partition of voters in model TE in fallback elections in the IC model. The maximum is $596,35$ seconds.

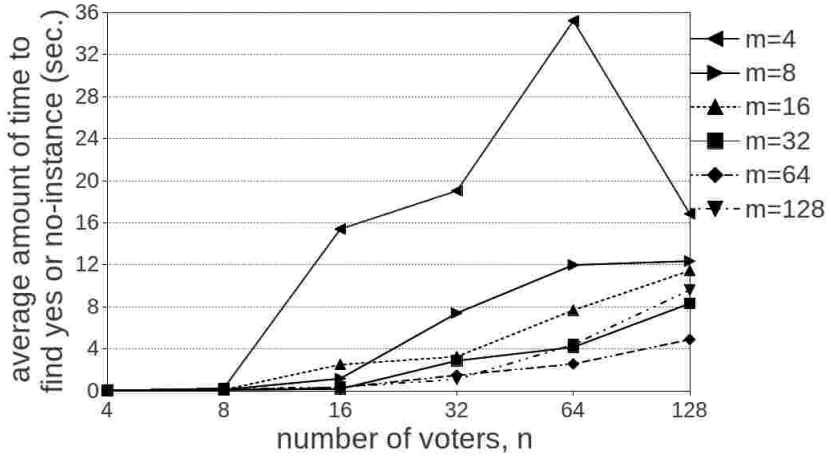


Figure 161: Average time the algorithm needs to give a definite output for destructive control by partition of voters in model TE in fallback elections in the IC model. The maximum is $35,22$ seconds.

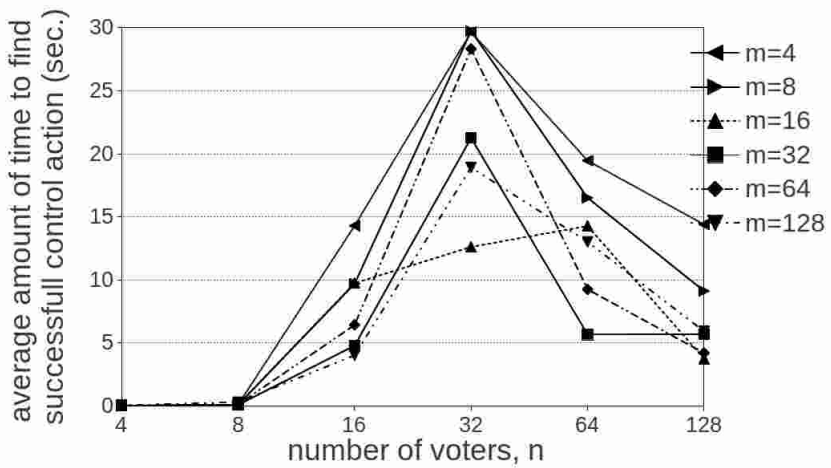


Figure 162: Average time the algorithm needs to find a successful control action for destructive control by partition of voters in model TE in fallback elections in the TM model. The maximum is $29,74$ seconds.

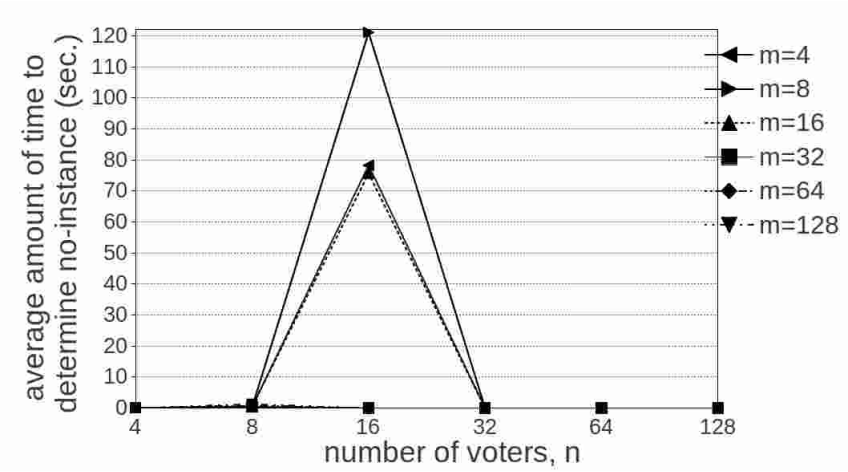


Figure 163: Average time the algorithm needs to determine no-instance of destructive control by partition of voters in model TE in fallback elections in the TM model. The maximum is 121,13 seconds.

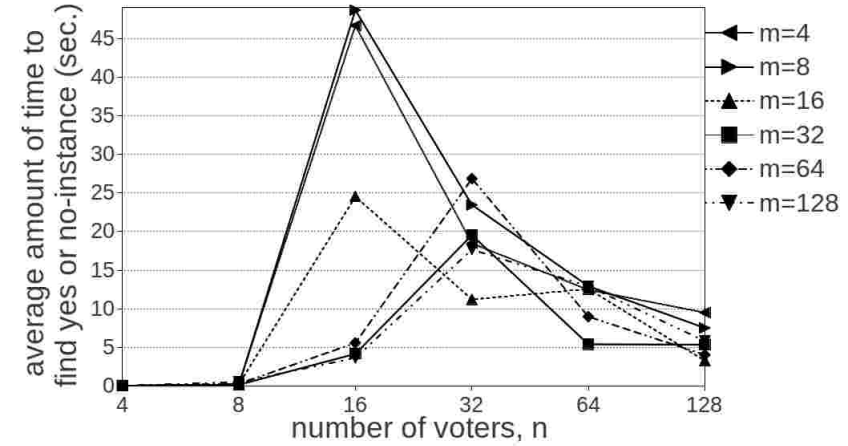


Figure 164: Average time the algorithm needs to give a definite output for destructive control by partition of voters in model TE in fallback elections in the TM model. The maximum is 48,7 seconds.48,7 seconds.

A.17. Constructive Control by Partition of Voters in Model TP

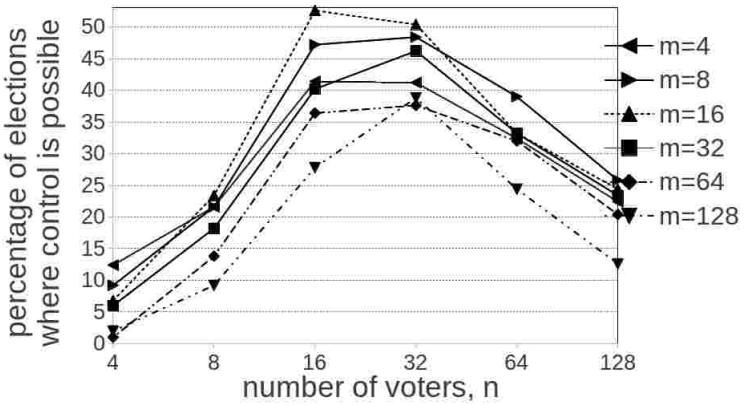


Figure 165: Results for fallback voting in the IC model for constructive control by partition of voters in model TP. Number of candidates is fixed.

	$m=4$						$m=8$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	62	108	207	206	162	112	46	108	236	242	195	129
# ci	438	392	293	0	0	0	454	392	232	0	0	0
# to	0	0	0	294	338	388	0	0	32	258	305	371
	$m=16$						$m=32$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	34	117	263	252	166	122	30	91	201	231	166	117
# ci	466	383	0	0	0	0	470	409	0	0	0	0
# to	0	0	237	248	334	378	0	0	299	269	334	383
	$m=64$						$m=128$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	5	69	182	188	160	102	10	46	139	194	122	63
# ci	495	431	0	0	0	0	490	454	0	0	0	1
# to	0	0	318	312	340	398	0	0	361	306	378	369

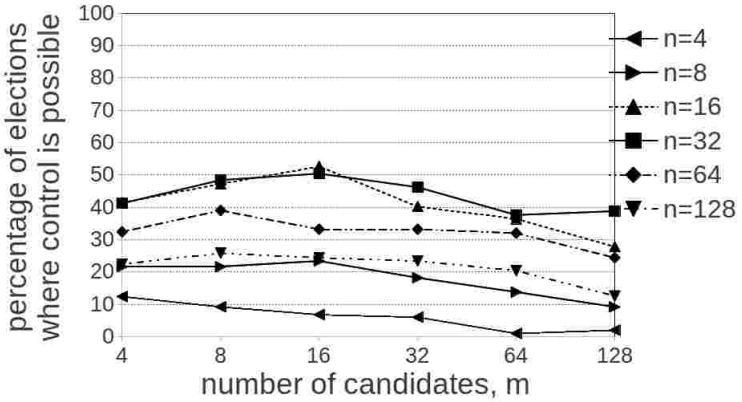


Figure 166: Results for fallback voting in the IC model for constructive control by partition of voters in model TP. Number of voters is fixed.

	$n=4$						$n=8$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	62	46	34	30	5	10	108	108	117	91	69	46
# ci	438	454	466	470	495	490	392	392	383	409	431	454
# to	0	0	0	0	0	0	0	0	0	0	0	0
	$n=16$						$n=32$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	207	236	263	201	182	139	206	242	252	231	188	194
# ci	293	232	0	0	0	0	0	0	0	0	0	0
# to	0	32	237	299	318	361	294	258	248	269	312	306
	$n=64$						$n=128$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	162	195	166	166	160	122	112	129	122	117	102	63
# ci	0	0	0	0	0	0	0	0	0	0	0	1
# to	338	305	334	334	340	378	388	371	378	383	398	369

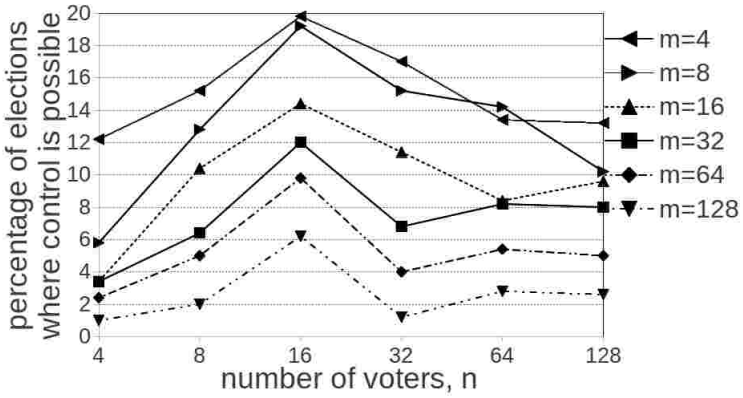


Figure 167: Results for fallback voting in the TM model for constructive control by partition of voters in model TP. Number of candidates is fixed.

	$m=4$						$m=8$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	61	76	99	85	67	66	29	64	96	76	71	51
# ci	439	424	401	111	97	82	471	436	390	95	55	49
# to	0	0	0	304	336	352	0	0	14	329	374	400
	$m=16$						$m=32$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	17	52	72	57	42	48	17	32	60	34	41	40
# ci	483	448	89	50	40	26	483	468	70	33	22	14
# to	0	0	339	393	418	426	0	0	370	433	437	446
	$m=64$						$m=128$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	12	25	49	20	27	25	5	10	31	6	14	13
# ci	488	475	62	27	8	7	495	490	57	23	10	2
# to	0	0	389	453	465	468	0	0	412	471	476	485

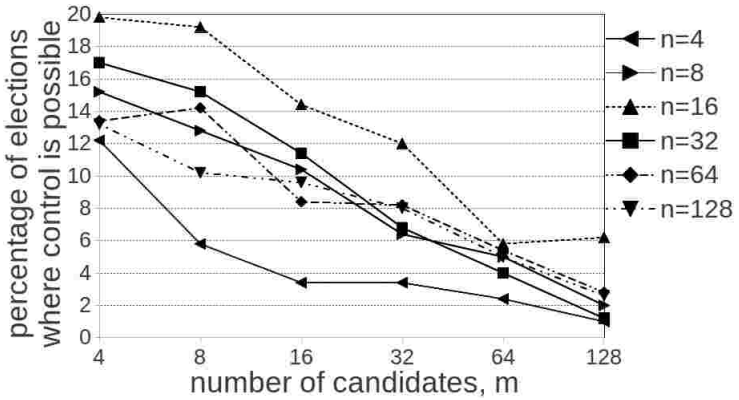


Figure 168: Results for fallback voting in the TM model for constructive control by partition of voters in model TP. Number of voters is fixed.

	$n=4$						$n=8$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	61	29	17	17	12	5	76	64	52	32	25	10
# ci	439	471	483	483	488	495	424	436	448	468	475	490
# to	0	0	0	0	0	0	0	0	0	0	0	0
	$n=16$						$n=32$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	99	96	72	60	49	31	85	76	57	34	20	6
# ci	401	390	89	70	62	57	111	95	50	33	27	23
# to	0	14	339	370	389	412	304	329	393	433	453	471
	$n=64$						$n=128$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	67	71	42	41	27	14	66	51	48	40	25	13
# ci	97	55	40	22	8	1	82	49	26	14	7	2
# to	336	374	418	437	465	476	352	400	446	446	468	485

A.17.1. Computational Costs

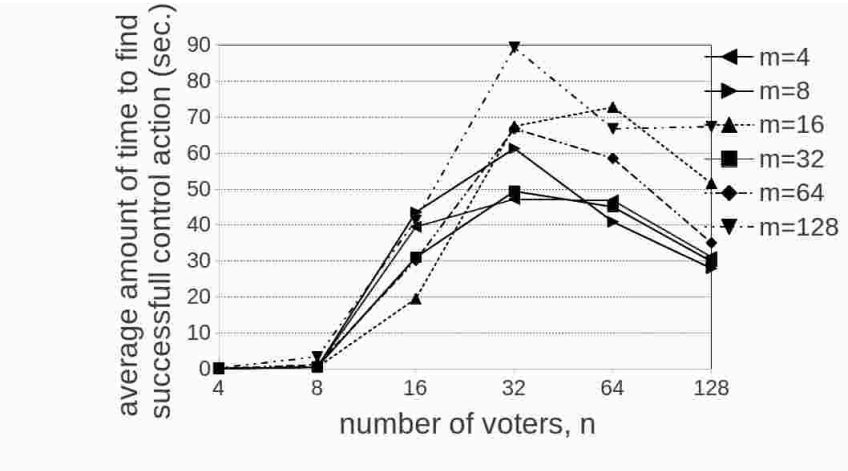


Figure 169: Average time the algorithm needs to find a successful control action for constructive control by partition of voters in model TP in fallback elections in the IC model. The maximum is 89,37 seconds.

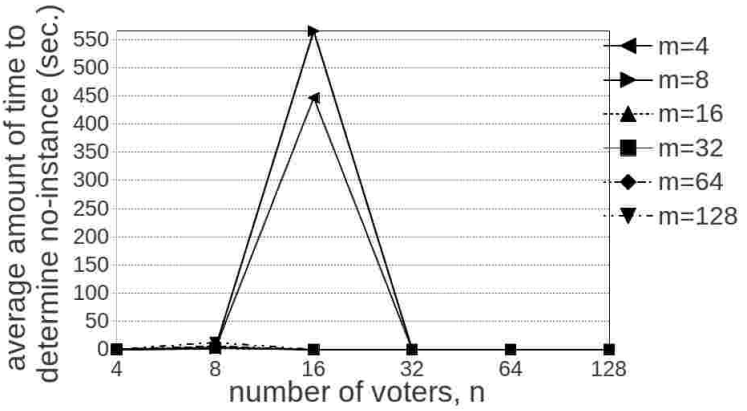


Figure 170: Average time the algorithm needs to determine no-instance of constructive control by partition of voters in model TP in fallback elections in the IC model. The maximum is 564,65 seconds.

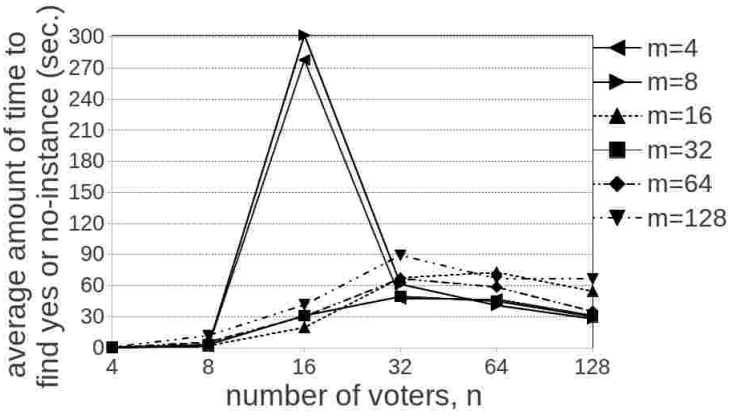


Figure 171: Average time the algorithm needs to give a definite output for constructive control by partition of voters in model TP in fallback elections in the IC model. The maximum is 301,87 seconds.

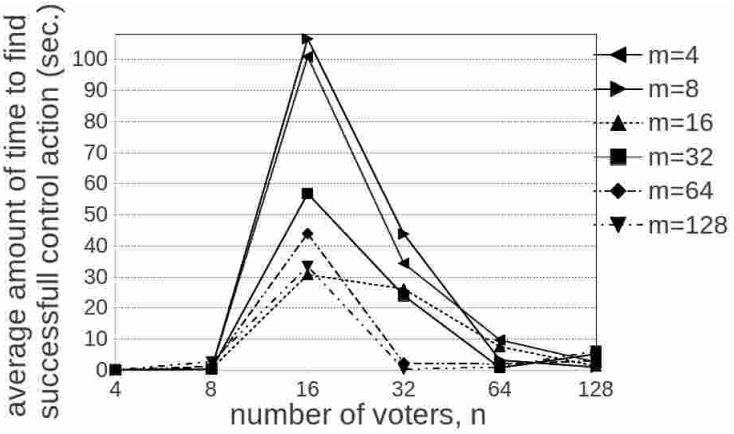


Figure 172: Average time the algorithm needs to find a successful control action for constructive control by partition of voters in model TP in fallback elections in the TM model. The maximum is 106,58 seconds.

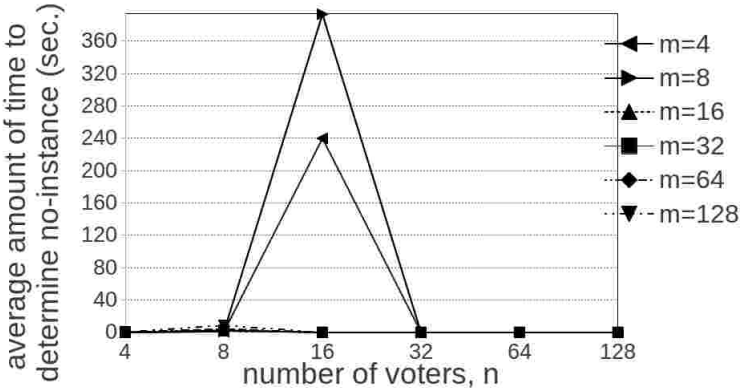


Figure 173: Average time the algorithm needs to determine no-instance of constructive control by partition of voters in model TP in fallback elections in the TM model. The maximum is 393, 18 seconds.

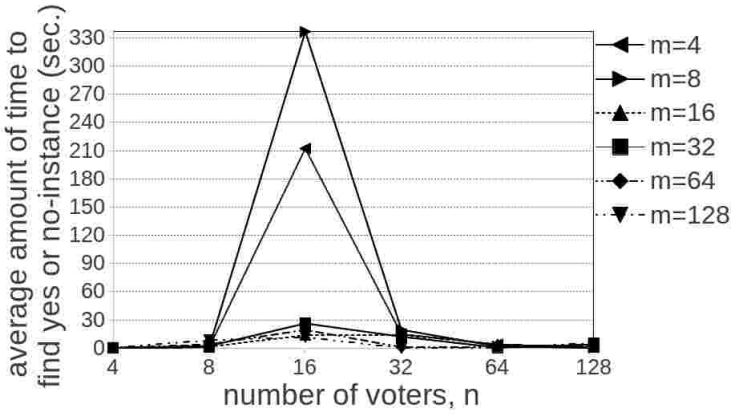


Figure 174: Average time the algorithm needs to give a definite output for constructive control by partition of voters in model TP in fallback elections in the TM model. The maximum is 336, 56 seconds.

A.18. Destructive Control by Partition of Voters in Model TP

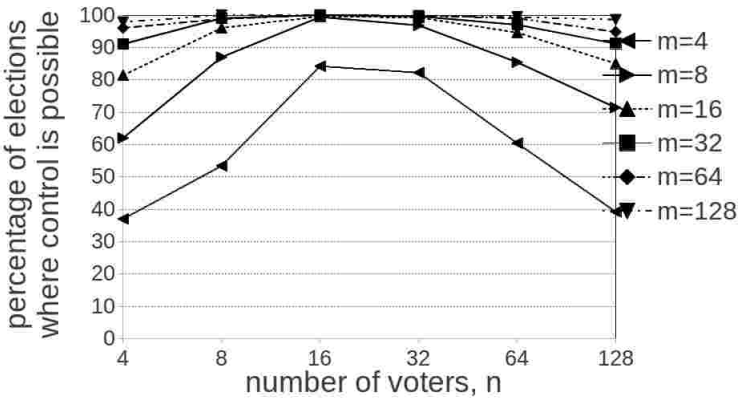


Figure 175: Results for fallback voting in the IC model for destructive control by partition of voters in model TP. Number of candidates is fixed.

	$m=4$						$m=8$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	185	267	421	411	302	196	310	435	497	484	427	357
# ci	315	233	79	0	0	0	190	65	3	0	0	0
# to	0	0	0	89	198	304	0	0	0	16	73	143
	$m=16$						$m=32$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	407	480	498	496	473	425	455	495	500	498	485	456
# ci	93	20	0	0	0	0	45	5	0	0	0	0
# to	0	0	2	4	27	75	0	0	0	2	15	44
	$m=64$						$m=128$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	480	494	500	499	495	474	489	500	500	499	497	493
# ci	20	6	0	0	0	0	11	0	0	0	0	0
# to	0	0	0	1	5	26	0	0	0	1	3	7

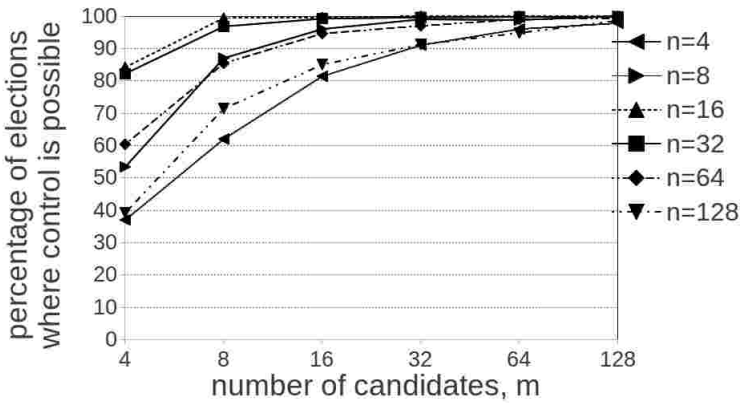


Figure 176: Results for fallback voting in the IC model for destructive control by partition of voters in model TP. Number of voters is fixed.

	$n=4$						$n=8$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	185	310	407	455	480	489	267	435	480	495	494	500
# ci	315	190	93	45	20	11	233	65	20	5	6	0
# to	0	0	0	0	0	0	0	0	0	0	0	0
	$n=16$						$n=32$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	421	497	498	500	500	500	411	484	496	498	499	499
# ci	79	3	0	0	0	0	0	0	0	0	0	0
# to	0	0	2	0	0	0	89	16	4	2	1	1
	$n=64$						$n=128$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	302	427	473	485	495	497	196	357	425	456	474	493
# ci	0	0	0	0	0	0	0	0	0	0	0	0
# to	198	73	27	15	5	3	304	143	75	44	26	7

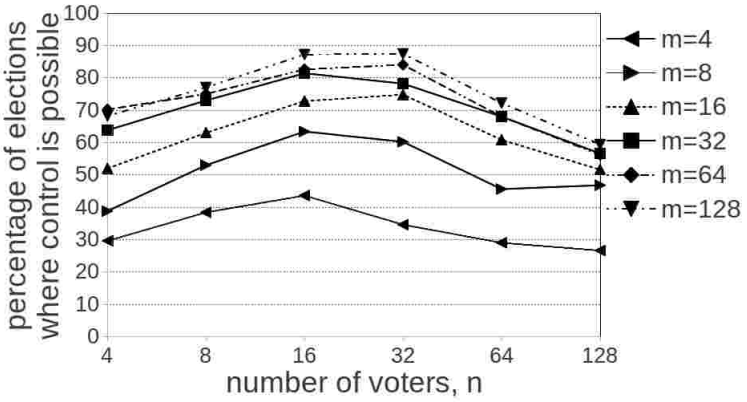


Figure 177: Results for fallback voting in the TM model for destructive control by partition of voters in model TP. Number of candidates is fixed.

	$m=4$						$m=8$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	148	192	218	173	145	133	194	265	317	301	228	234
# ci	352	308	282	132	95	79	306	235	182	86	64	49
# to	0	0	0	195	260	288	0	0	1	113	208	217

	$m=16$						$m=32$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	260	315	364	374	304	258	319	365	407	391	340	283
# ci	240	185	96	48	41	35	181	135	63	35	16	17
# to	0	0	40	78	155	207	0	0	30	74	144	200

	$m=64$						$m=128$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	351	375	413	420	340	281	341	385	436	437	361	297
# ci	149	125	64	23	10	11	159	115	46	31	3	5
# to	0	0	23	57	150	208	0	0	18	32	136	198

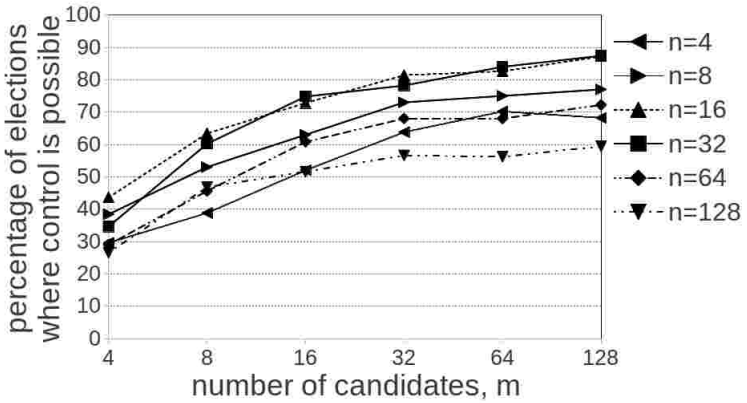


Figure 178: Results for fallback voting in the TM model for destructive control by partition of voters in model TP. Number of voters is fixed.

	$n=4$						$n=8$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	148	194	260	319	351	341	192	265	315	365	375	385
# ci	352	306	240	181	149	159	308	235	185	135	125	115
# to	0	0	0	0	0	0	0	0	0	0	0	0
	$n=16$						$n=32$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	218	317	364	407	413	436	173	301	374	391	420	437
# ci	282	182	96	63	64	46	132	86	48	35	23	31
# to	0	1	40	30	23	18	195	113	78	74	57	32
	$n=64$						$n=128$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	145	228	304	340	340	361	133	234	258	283	281	297
# ci	95	64	41	16	10	3	79	49	35	17	11	5
# to	260	208	155	144	150	136	288	217	207	200	208	198

A.18.1. Computational Costs

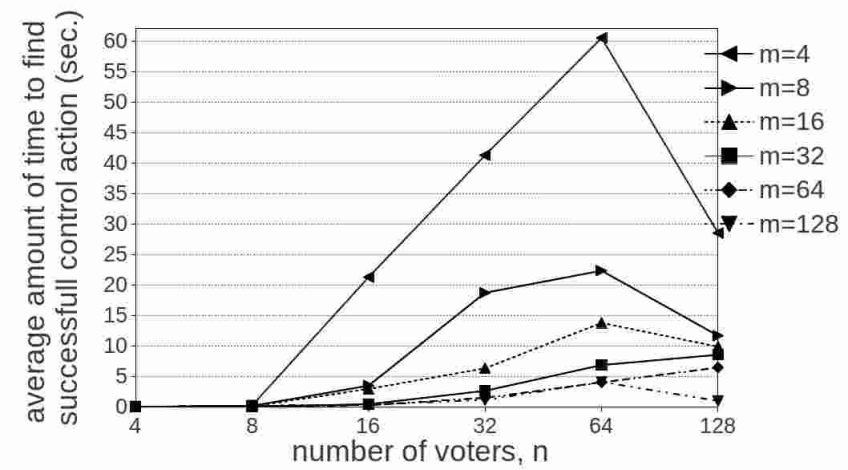


Figure 179: Average time the algorithm needs to find a successful control action for destructive control by partition of voters in model TP in fallback elections in the IC model. The maximum is $60,49$ seconds.

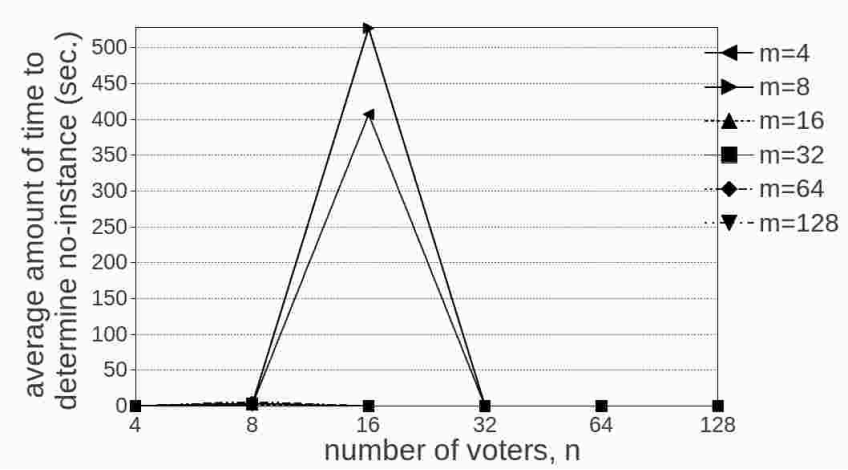


Figure 180: Average time the algorithm needs to determine no-instance of destructive control by partition of voters in model TP in fallback elections in the IC model. The maximum is $527,4$ seconds.

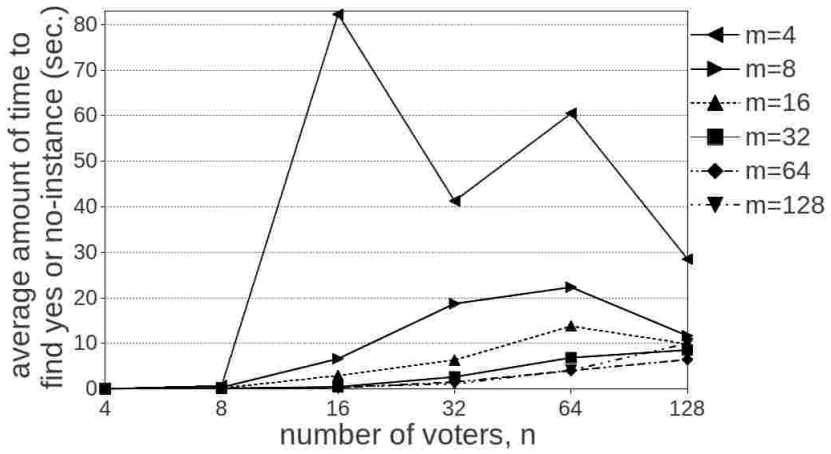


Figure 181: Average time the algorithm needs to give a definite output for destructive control by partition of voters in model TP in fallback elections in the IC model. The maximum is 82,22 seconds.

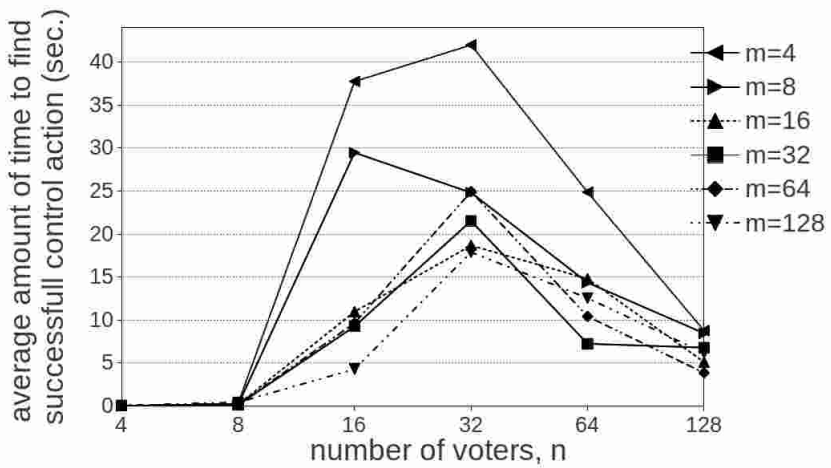


Figure 182: Average time the algorithm needs to find a successful control action for destructive control by partition of voters in model TP in fallback elections in the TM model. The maximum is 42 seconds.

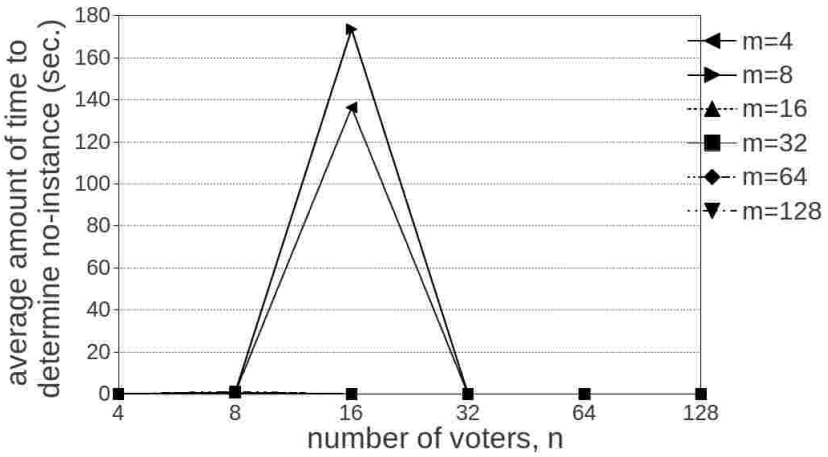


Figure 183: Average time the algorithm needs to determine no-instance of destructive control by partition of voters in model TP in fallback elections in the TM model. The maximum is 173,62 seconds.

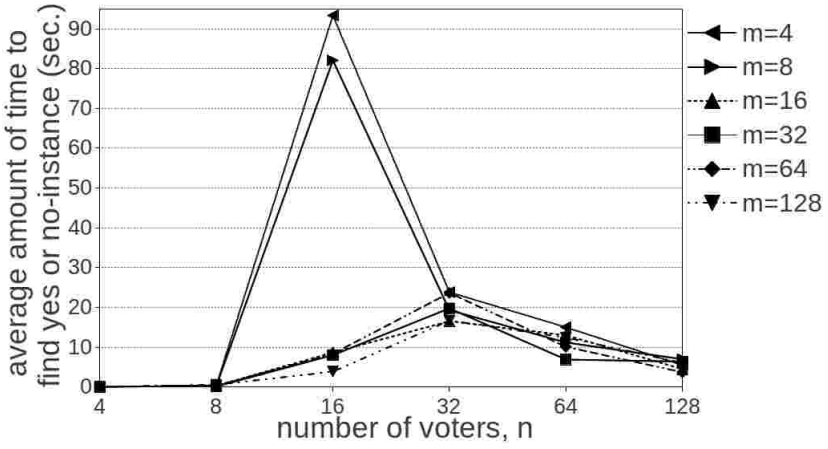


Figure 184: Average time the algorithm needs to give a definite output for destructive control by partition of voters in model TP in fallback elections in the TM model. The maximum is 93,34 seconds.

B. Bucklin Voting

B.1. Constructive Control by Adding Candidates

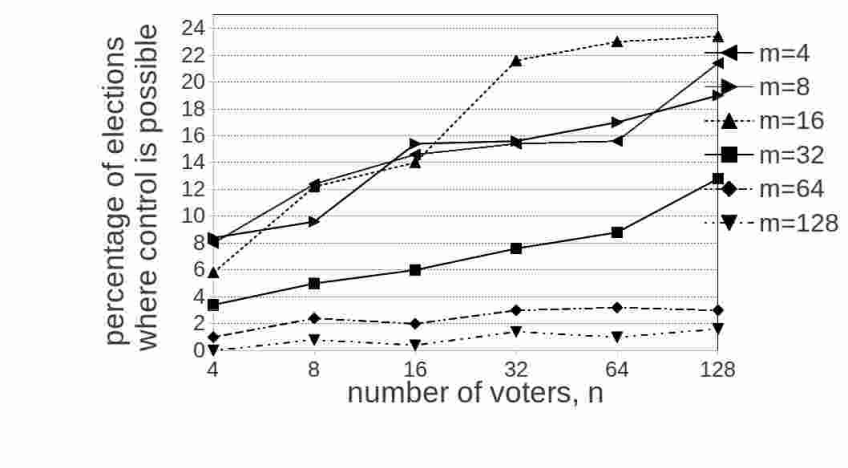


Figure 185: Results for Bucklin voting in the IC model for constructive control by adding candidates. Number of candidates is fixed.

	$m=4$						$m=8$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	40	62	73	77	78	107	42	48	77	78	85	95
# ci	460	438	427	423	422	393	458	452	423	422	415	405
# to	0	0	0	0	0	0	0	0	0	0	0	0
	$m=16$						$m=32$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	29	61	70	108	115	117	17	25	30	38	44	64
# ci	471	439	430	392	385	0	0	0	0	0	0	0
# to	0	0	0	0	0	383	483	475	470	462	456	436
	$m=64$						$m=128$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	5	12	10	15	16	15	0	4	2	7	5	8
# ci	0	0	0	0	0	0	0	0	0	0	0	0
# to	495	488	490	485	484	485	500	496	498	493	495	492

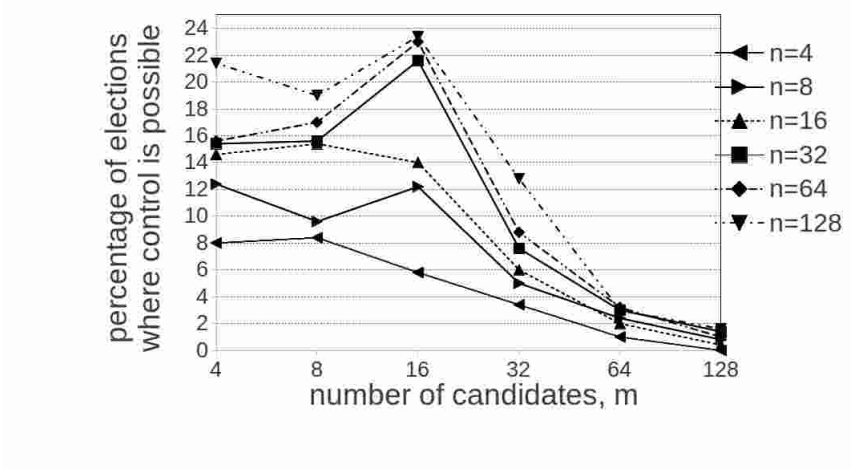


Figure 186: Results for Bucklin voting in the IC model for constructive control by adding candidates. Number of voters is fixed.

	$n=4$						$n=8$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	40	42	29	17	5	0	62	48	61	25	12	4
# ci	460	458	471	0	0	0	438	452	439	0	0	0
# to	0	0	0	483	495	500	0	0	0	475	488	496
	$n=16$						$n=32$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	73	77	70	30	10	2	77	78	108	38	15	7
# ci	427	423	430	0	0	0	423	422	392	0	0	0
# to	0	0	0	470	490	498	0	0	0	462	485	493
	$n=64$						$n=128$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	78	85	115	44	16	5	107	95	117	64	15	8
# ci	422	415	385	0	0	0	393	405	0	0	0	0
# to	0	0	0	456	484	495	0	0	383	436	485	492

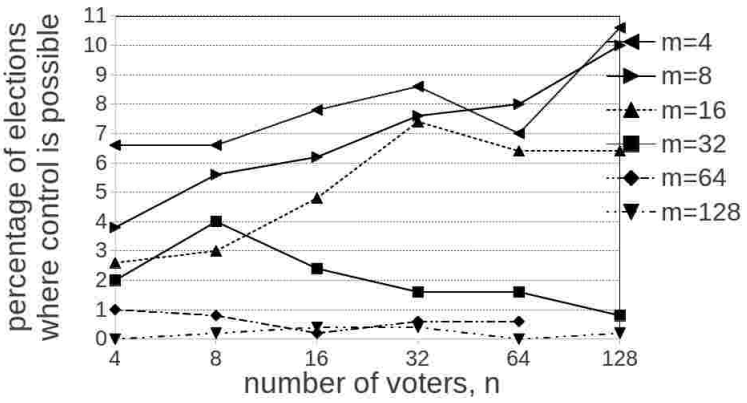


Figure 187: Results for Bucklin voting in the TM model for constructive control by adding candidates. Number of candidates is fixed.

	$m=4$						$m=8$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	33	33	39	43	35	53	19	28	31	38	40	50
# ci	467	467	461	457	465	447	481	472	469	462	460	450
# to	0	0	0	0	0	0	0	0	0	0	0	0
	$m=16$						$m=32$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	13	15	24	37	32	32	10	20	12	8	8	4
# ci	487	485	476	463	468	0	0	0	0	0	0	0
# to	0	0	0	0	0	468	490	480	488	492	492	496
	$m=64$						$m=128$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	5	4	1	3	3	1	0	1	2	2	0	1
# ci	0	0	0	0	0	0	0	0	0	0	0	0
# to	495	496	499	497	497	499	500	499	498	498	500	499

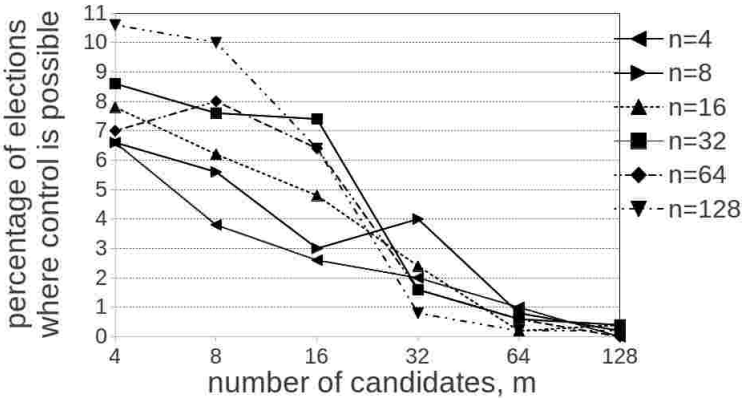


Figure 188: Results for Bucklin voting in the TM model for constructive control by adding candidates. Number of voters is fixed.

	$n=4$						$n=8$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	33	19	13	10	5	0	33	28	15	20	4	1
# ci	467	481	487	0	0	0	467	472	485	0	0	0
# to	0	0	0	490	495	500	0	0	0	480	496	499
	$n=16$						$n=32$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	39	31	24	12	1	2	43	38	37	8	3	2
# ci	461	469	476	0	0	0	457	462	463	0	0	0
# to	0	0	0	488	499	498	0	0	0	492	497	498
	$n=64$						$n=128$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	35	40	32	8	3	0	53	50	32	4	1	1
# ci	465	460	468	0	0	0	447	450	0	0	0	0
# to	0	0	0	492	497	500	0	0	468	496	499	499

B.1.1. Computational Costs

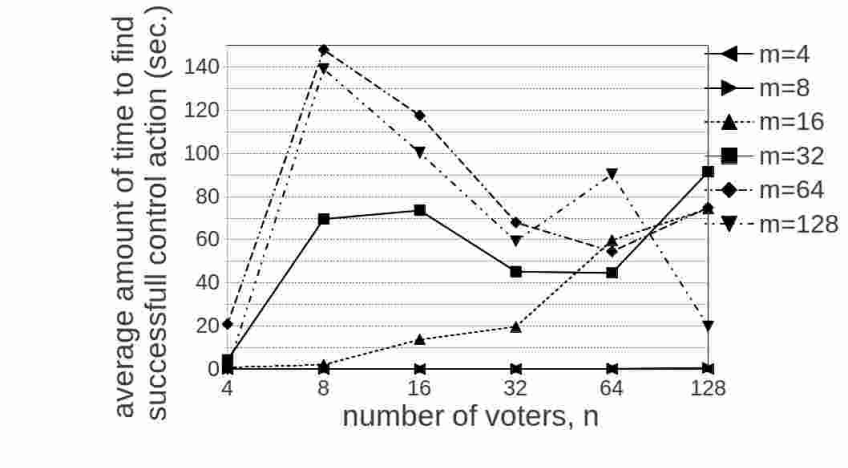


Figure 189: Average time the algorithm needs to find a successful control action for constructive control by adding candidates in Bucklin elections in the IC model. The maximum is 148 seconds.

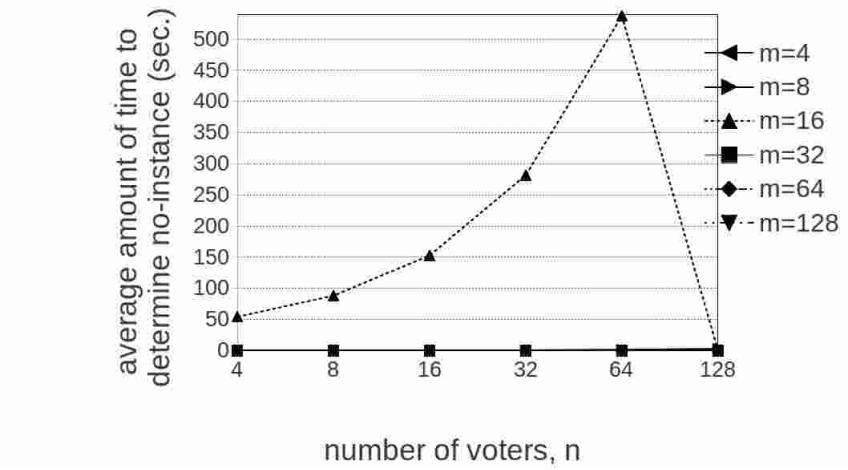


Figure 190: Average time the algorithm needs to determine no-instance of constructive control by adding candidates in Bucklin elections in the IC model. The maximum is $537,35$ seconds.

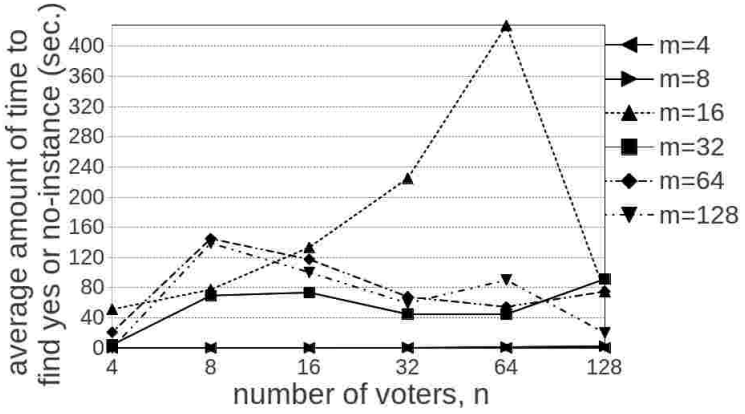


Figure 191: Average time the algorithm needs to give a definite output for constructive control by adding candidates in Bucklin elections in the IC model. The maximum is 427,51 seconds.

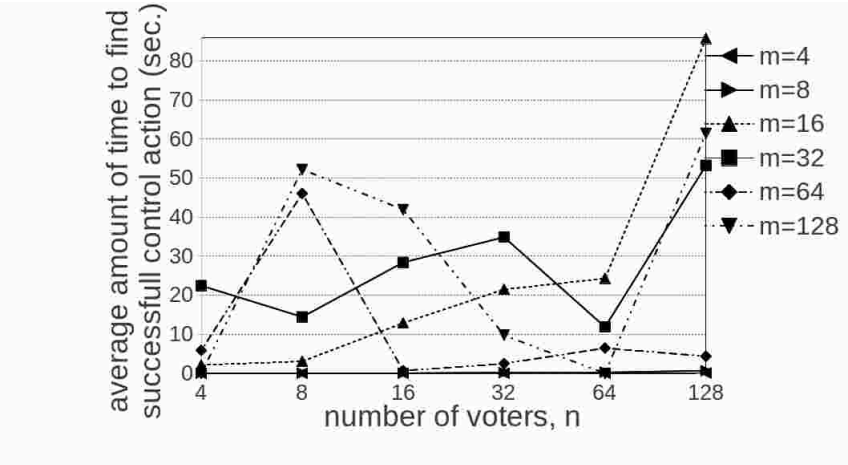


Figure 192: Average time the algorithm needs to find a successful control action for constructive control by adding candidates in Bucklin elections in the TM model. The maximum is 85,81 seconds.

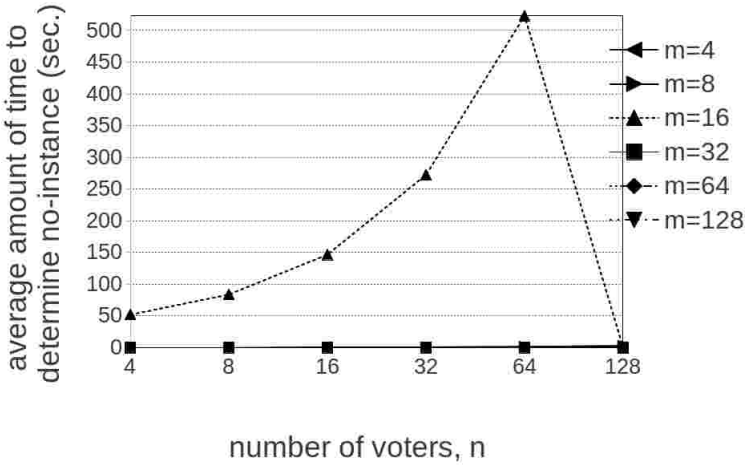


Figure 193: Average time the algorithm needs to determine no-instance of constructive control by adding candidates in Bucklin elections in the TM model. The maximum is 523,05 seconds.

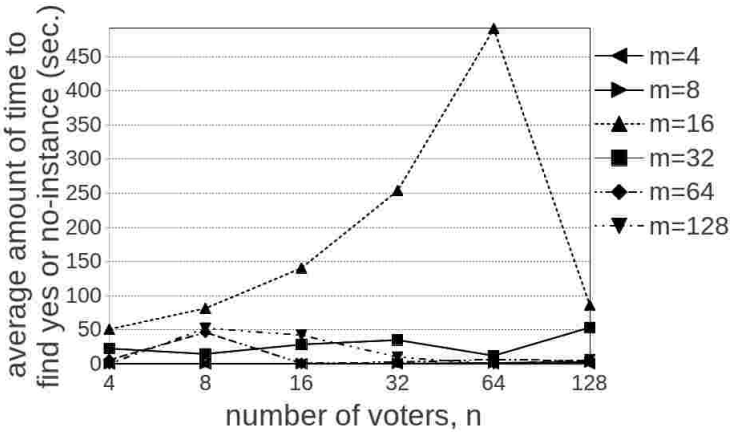


Figure 194: Average time the algorithm needs to give a definite output for constructive control by adding candidates in Bucklin elections in the TM model. The maximum is 491,13 seconds.

B.2. Destructive Control by Adding Candidates

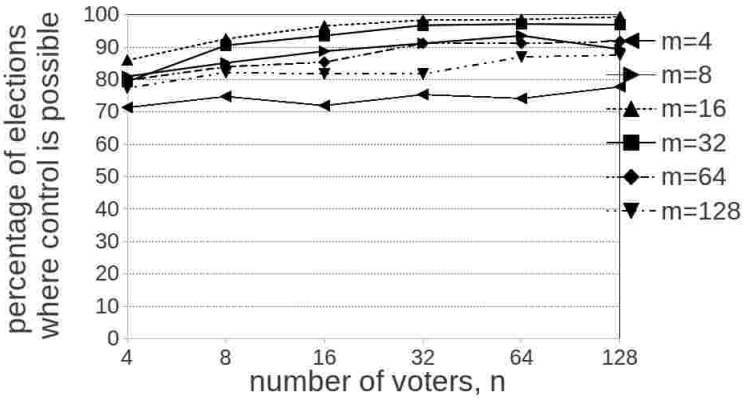


Figure 195: Results for Bucklin voting in the IC model for destructive control by adding candidates. Number of candidates is fixed.

	$m=4$						$m=8$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	357	374	360	377	371	389	405	426	444	456	468	447
# ci	143	126	140	123	129	111	95	74	56	44	32	53
# to	0	0	0	0	0	0	0	0	0	0	0	0
	$m=16$						$m=32$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	430	463	483	492	493	497	397	453	468	484	486	485
# ci	70	37	17	8	7	0	1	0	0	0	0	0
# to	0	0	0	0	0	3	102	47	32	16	14	15
	$m=64$						$m=128$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	399	420	427	456	456	459	387	411	409	409	435	438
# ci	0	0	0	0	0	0	0	0	0	0	0	0
# to	101	80	73	44	44	41	113	89	91	91	65	62

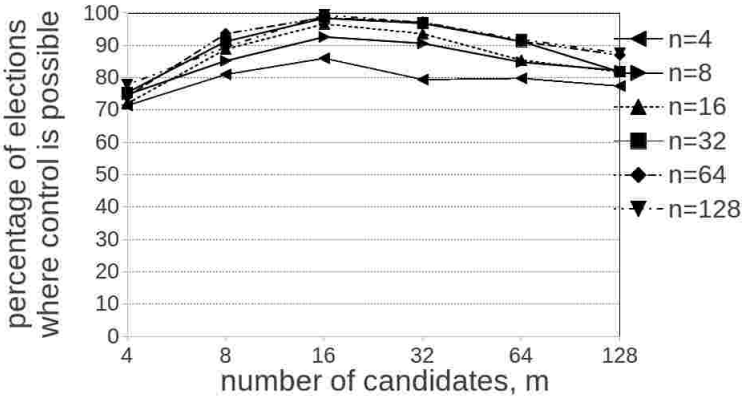


Figure 196: Results for Bucklin voting in the IC model for destructive control by adding candidates. Number of voters is fixed.

	$n=4$						$n=8$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	357	405	430	397	399	387	374	426	463	453	420	411
# ci	143	95	70	1	0	0	126	74	37	0	0	0
# to	0	0	0	102	101	113	0	0	0	47	80	89
	$n=16$						$n=32$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	360	444	483	468	427	409	377	456	492	484	456	409
# ci	140	56	17	0	0	0	123	44	8	0	0	0
# to	0	0	0	32	73	91	0	0	0	16	44	91
	$n=64$						$n=128$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	371	468	493	486	456	435	389	447	497	485	459	438
# ci	129	32	7	0	0	0	111	53	0	0	0	0
# to	0	0	0	14	44	65	0	0	3	15	41	62

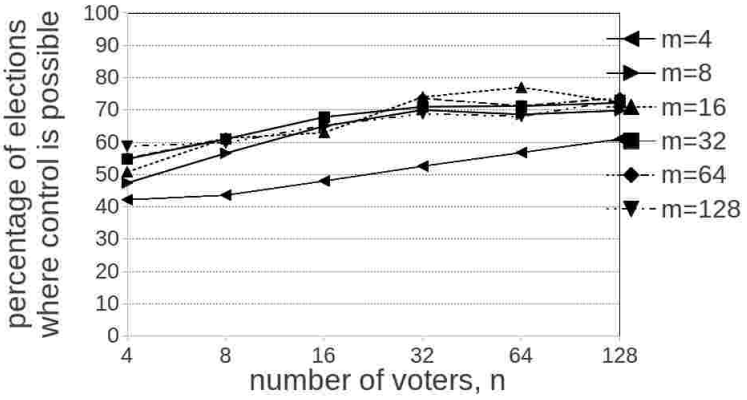


Figure 197: Results for Bucklin voting in the TM model for destructive control by adding candidates. Number of candidates is fixed.

	$m=4$						$m=8$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	211	218	240	263	284	305	237	283	325	350	343	349
# ci	289	282	260	237	216	195	263	217	175	150	157	151
# to	0	0	0	0	0	0	0	0	0	0	0	0
	$m=16$						$m=32$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	254	306	315	370	385	362	274	305	339	355	356	361
# ci	246	194	185	130	115	19	135	104	62	27	9	6
# to	0	0	0	0	0	119	91	91	99	118	135	133
	$m=64$						$m=128$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	275	306	321	368	356	369	294	299	326	344	340	365
# ci	124	105	61	24	6	8	109	94	64	22	7	1
# to	101	89	118	108	138	123	97	107	110	134	153	134

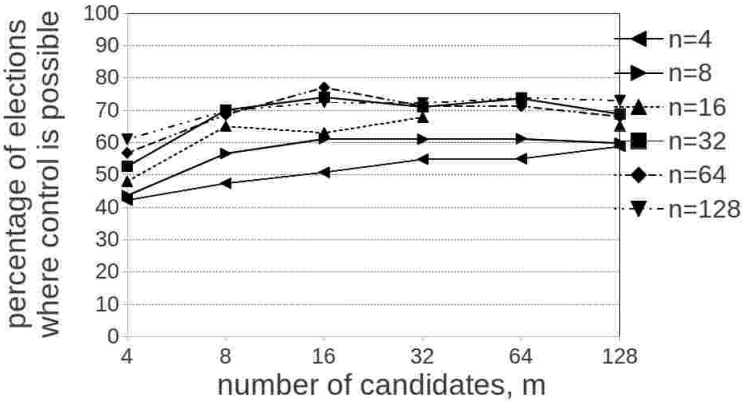


Figure 198: Results for Bucklin voting in the TM model for destructive control by adding candidates. Number of voters is fixed.

	$n=4$						$n=8$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	211	237	254	274	275	294	218	283	306	305	306	299
# ci	289	263	246	135	124	109	282	217	194	104	105	94
# to	0	0	0	91	101	97	0	0	0	91	89	107
	$n=16$						$n=32$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	240	325	315	339	321	326	263	350	370	355	368	344
# ci	26	175	185	62	61	64	237	150	130	27	24	22
# to	0	0	0	99	118	110	0	0	0	118	108	134
	$n=64$						$n=128$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	284	343	385	356	356	340	305	349	362	361	369	365
# ci	216	157	115	9	6	7	195	151	19	6	8	1
# to	0	0	0	135	138	153	0	0	119	133	123	134

B.2.1. Computational Costs

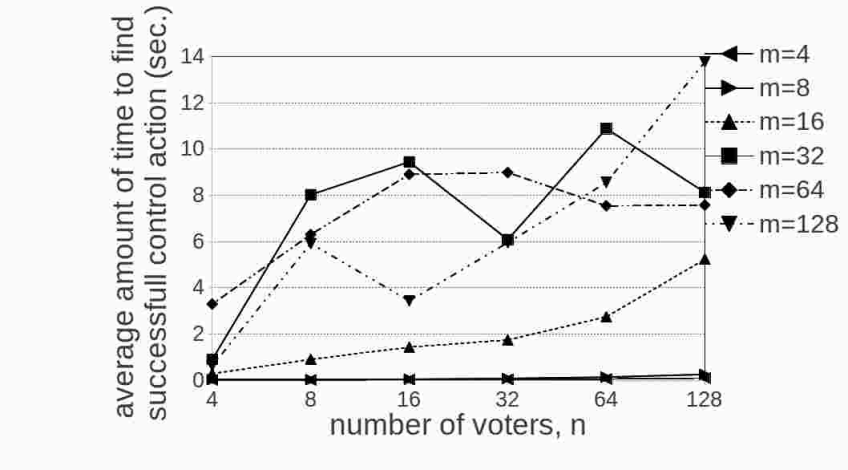


Figure 199: Average time the algorithm needs to find a successful control action for destructive control by adding candidates in Bucklin elections in the IC model. The maximum is $13,77$ seconds.

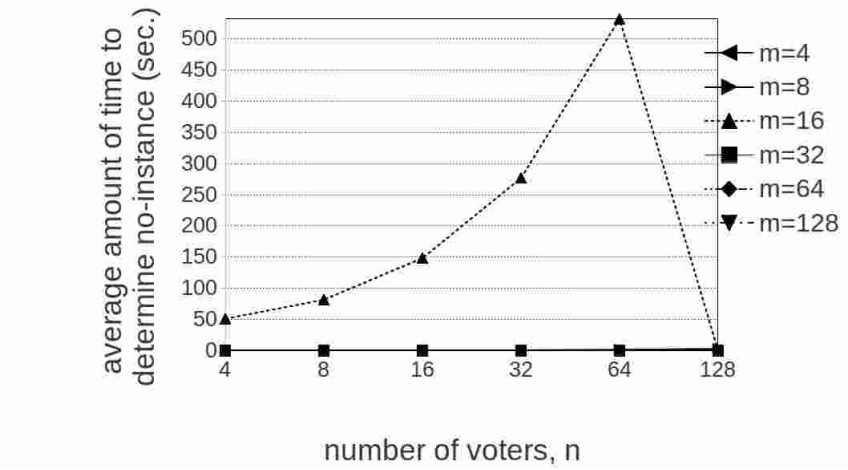


Figure 200: Average time the algorithm needs to determine no-instance of destructive control by adding candidates in Bucklin elections in the IC model. The maximum is $532,06$ seconds.

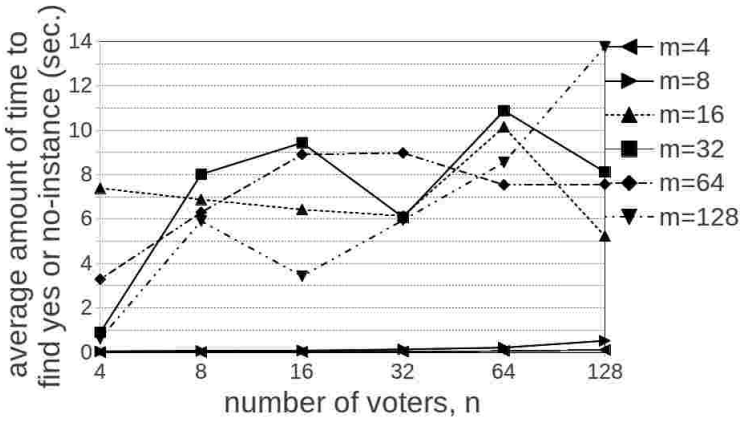


Figure 201: Average time the algorithm needs to give a definite output for destructive control by adding candidates in Bucklin elections in the IC model. The maximum is 13,77 seconds.

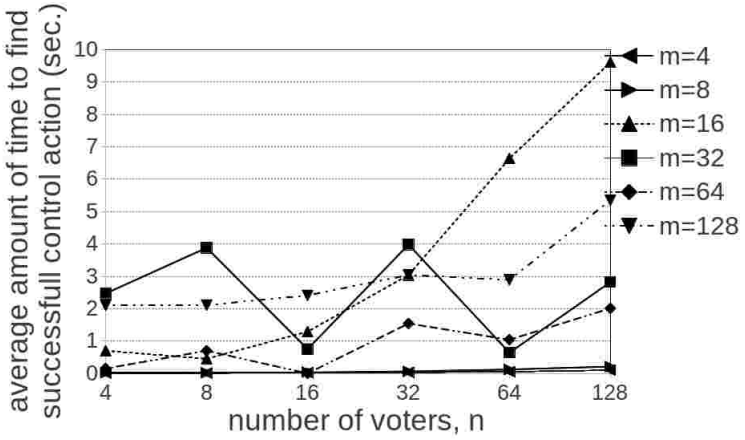


Figure 202: Average time the algorithm needs to find a successful control action for destructive control by adding candidates in Bucklin elections in the TM model. The maximum is 9,61 seconds.

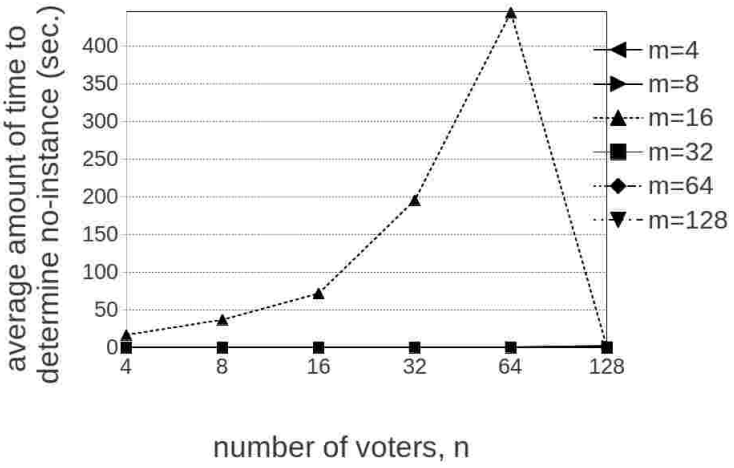


Figure 203: Average time the algorithm needs to determine no-instance of destructive control by adding candidates in Bucklin elections in the TM model. The maximum is 444,22 seconds.

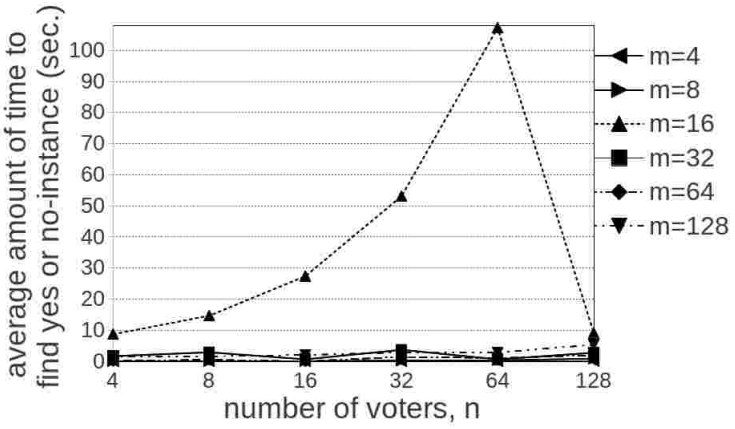


Figure 204: Average time the algorithm needs to give a definite output for destructive control by adding candidates in Bucklin elections in the TM model. The maximum is 107,28 seconds.

B.3. Constructive Control by Deleting Candidates

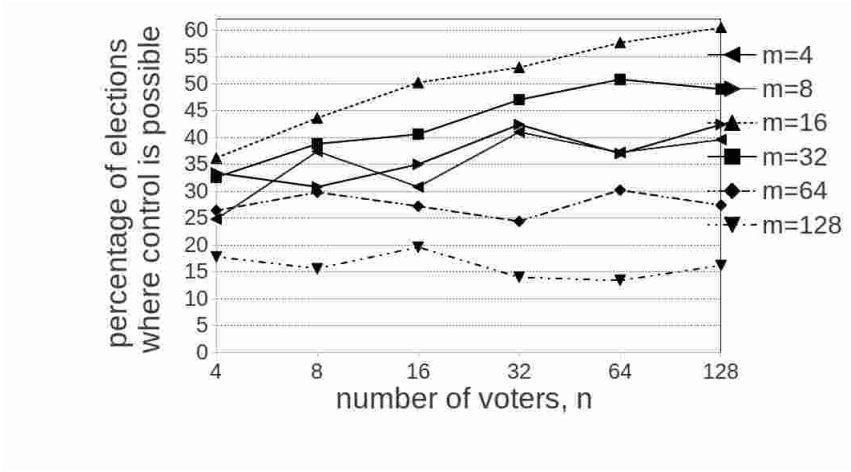


Figure 205: Results for Bucklin voting in the IC model for constructive control by deleting candidates. Number of candidates is fixed.

	$m=4$						$m=8$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	124	187	154	205	186	198	167	154	175	212	185	221
# ci	376	313	346	295	314	302	333	346	325	288	315	279
# to	0	0	0	0	0	0	0	0	0	0	0	0
	$m=16$						$m=32$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	181	218	251	265	288	302	163	194	203	235	254	245
# ci	319	282	249	235	212	198	0	0	0	0	0	0
# to	0	0	0	0	0	0	337	306	297	265	246	255
	$m=64$						$m=128$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	132	149	136	122	151	137	89	78	98	70	67	81
# ci	0	0	0	0	0	0	0	0	0	0	0	0
# to	368	351	364	378	349	363	411	422	402	430	433	419

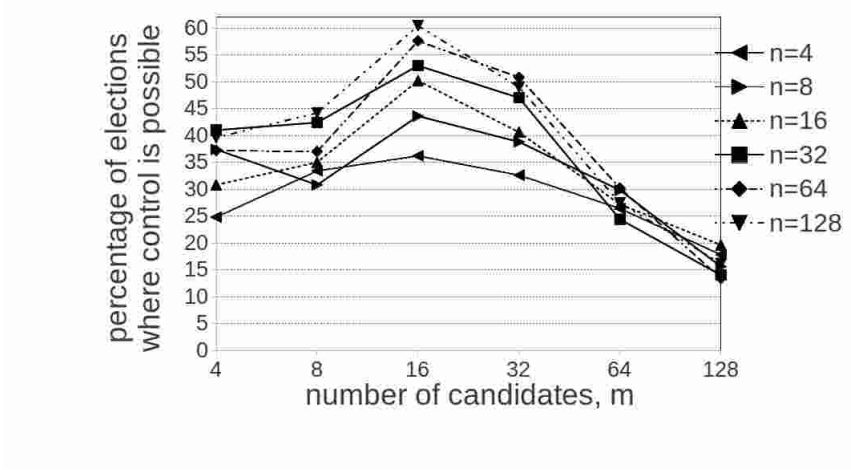


Figure 206: Results for Bucklin voting in the IC model for constructive control by deleting candidates. Number of voters is fixed.

	$n=4$						$n=8$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	124	167	181	163	132	89	187	154	218	194	149	78
# ci	376	333	319	0	0	0	313	346	282	0	0	0
# to	0	0	0	337	368	411	0	0	0	306	351	422
	$n=16$						$n=32$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	154	175	251	203	136	98	205	212	265	235	122	70
# ci	346	325	249	0	0	0	295	288	235	0	0	0
# to	0	0	0	297	364	402	0	0	0	265	378	430
	$n=64$						$n=128$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	186	185	288	254	151	67	198	221	302	245	137	81
# ci	314	315	212	0	0	0	302	279	198	0	0	0
# to	0	0	0	246	349	433	0	0	0	255	363	419

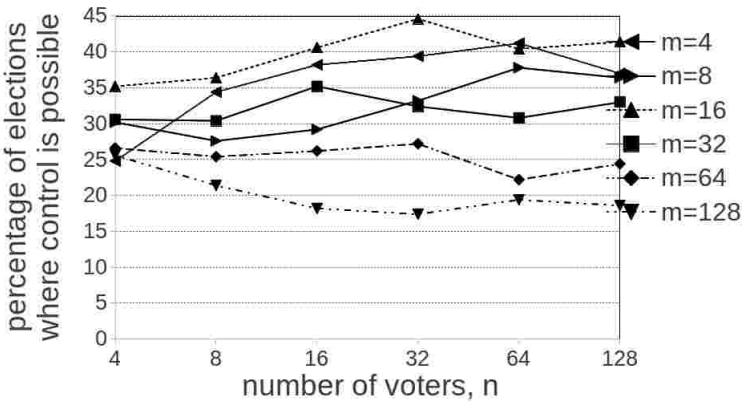


Figure 207: Results for Bucklin voting in the TM model for constructive control by deleting candidates. Number of candidates is fixed.

	$m=4$						$m=8$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	124	172	191	197	206	185	151	138	146	166	189	182
# ci	376	328	309	303	294	315	349	362	354	334	311	318
# to	0	0	0	0	0	0	0	0	0	0	0	0
	$m=16$						$m=32$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	176	182	203	223	202	207	153	152	176	162	154	165
# ci	324	318	297	277	298	293	0	0	0	0	0	0
# to	0	0	0	0	0	0	347	348	324	338	346	335
	$m=64$						$m=128$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	133	127	131	136	111	122	128	107	91	87	97	93
# ci	2	0	0	0	0	0	0	0	0	0	0	0
# to	365	373	369	364	389	378	372	393	409	413	403	407

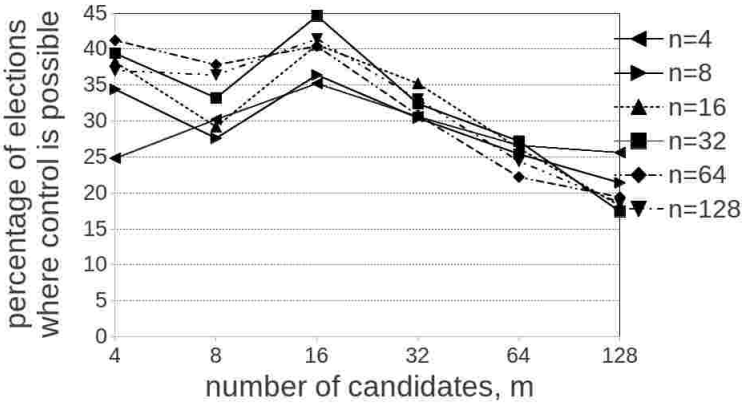


Figure 208: Results for Bucklin voting in the TM model for constructive control by deleting candidates. Number of voters is fixed.

	$n=4$						$n=8$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	124	151	176	153	133	128	172	138	182	152	127	107
# ci	376	349	324	0	2	0	328	362	318	0	0	0
# to	0	0	0	347	365	372	0	0	0	348	373	393
	$n=16$						$n=32$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	191	146	203	176	131	91	197	166	223	162	136	87
# ci	309	354	297	0	0	0	303	334	277	0	0	0
# to	0	0	0	324	369	409	0	0	0	338	364	413
	$n=64$						$n=128$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	206	189	202	154	111	97	185	182	207	165	122	93
# ci	294	311	298	0	0	0	315	318	293	0	0	0
# to	0	0	0	346	389	403	0	0	0	335	378	407

B.3.1. Computational Costs

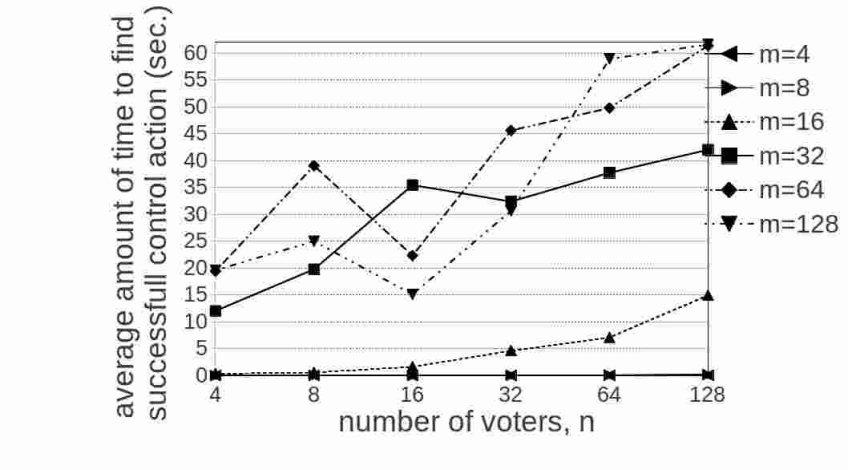


Figure 209: Average time the algorithm needs to find a successful control action for constructive control by deleting candidates in Bucklin elections in the IC model. The maximum is 61,64 seconds.

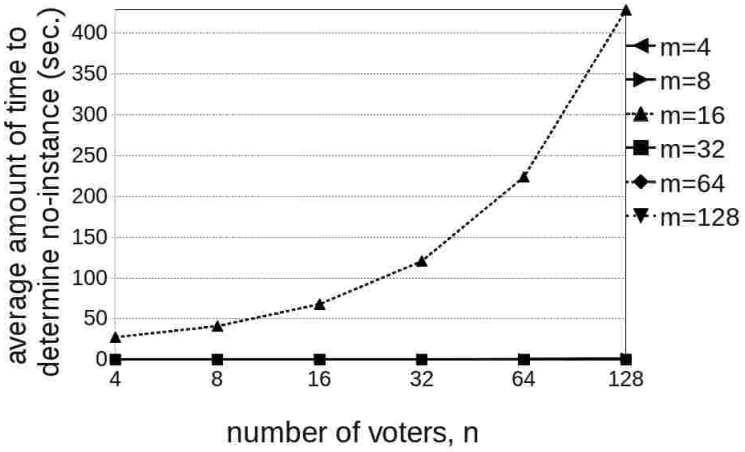


Figure 210: Average time the algorithm needs to determine no-instance of constructive control by deleting candidates in Bucklin elections in the IC model. The maximum is 428,06 seconds.

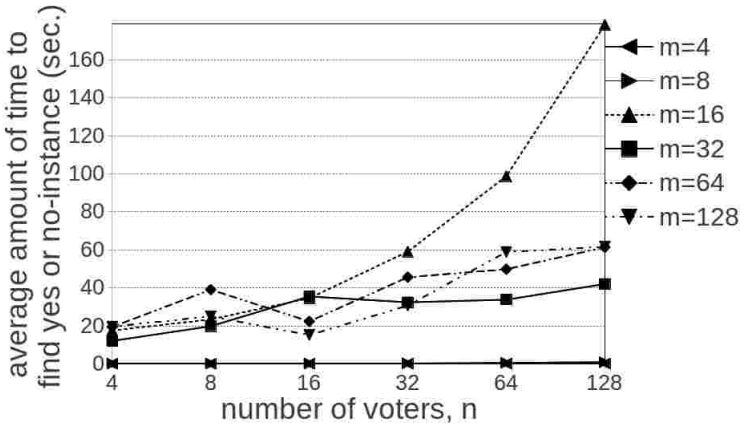


Figure 211: Average time the algorithm needs to give a definite output for constructive control by deleting candidates in Bucklin elections in the IC model. The maximum is 178,54 seconds.

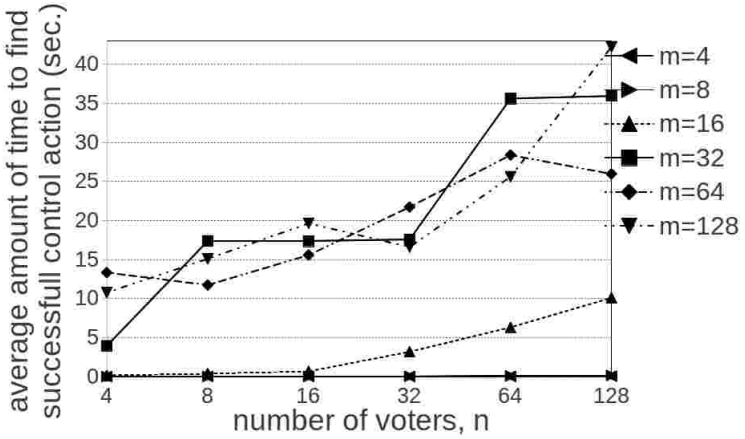


Figure 212: Average time the algorithm needs to find a successful control action for constructive control by deleting candidates in Bucklin elections in the TM model. The maximum is 42,25 seconds.

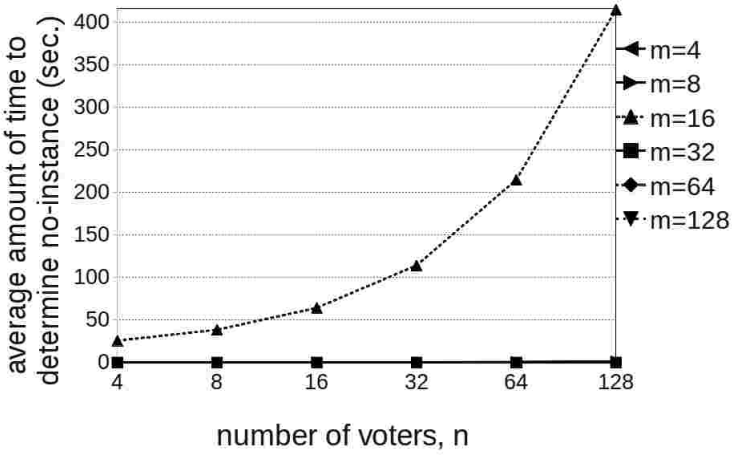


Figure 213: Average time the algorithm needs to determine no-instance of constructive control by deleting candidates in Bucklin elections in the TM model. The maximum is 415,02 seconds.

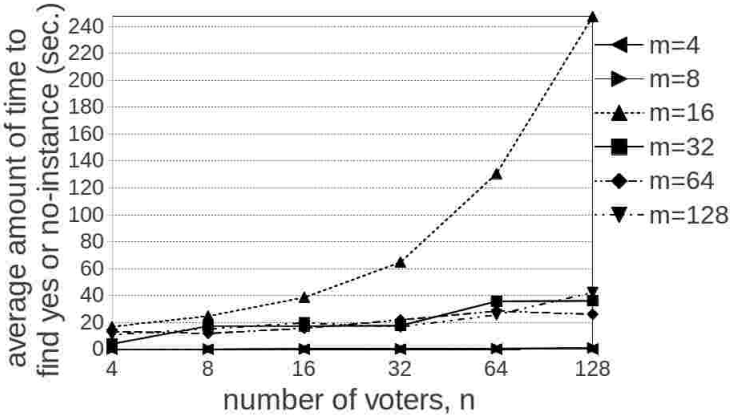


Figure 214: Average time the algorithm needs to give a definite output for constructive control by deleting candidates in Bucklin elections in the TM model. The maximum is 247,38 seconds.

B.4. Destructive Control by Deleting Candidates

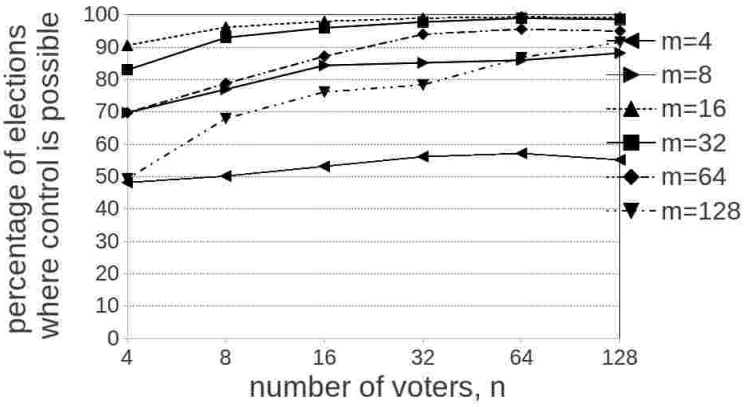


Figure 215: Results for Bucklin voting in the IC model for destructive control by deleting candidates. Number of candidates is fixed.

	$m=4$						$m=8$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	241	251	266	281	286	276	349	385	422	426	430	441
# ci	259	249	234	219	214	224	151	115	78	74	70	59
# to	0	0	0	0	0	0	0	0	0	0	0	0
	$m=16$						$m=32$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	453	481	490	495	497	496	415	465	480	489	495	493
# ci	47	19	10	5	3	4	1	0	0	0	0	0
# to	0	0	0	0	0	0	84	35	20	11	5	7
	$m=64$						$m=128$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	349	394	436	470	478	475	247	340	381	392	434	458
# ci	0	0	0	0	0	0	0	0	0	0	0	0
# to	151	106	64	30	22	25	253	160	119	108	66	42

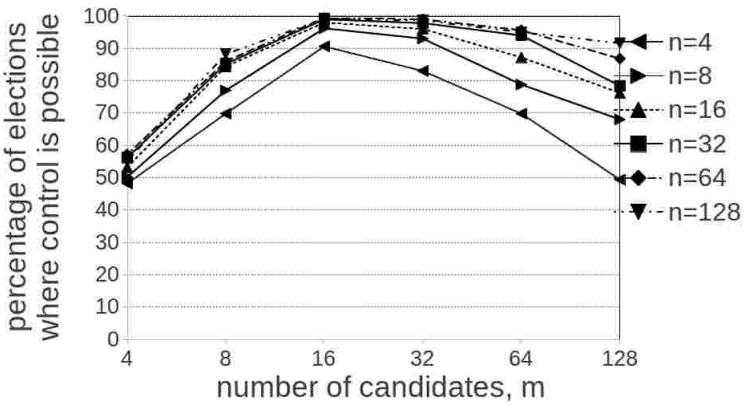


Figure 216: Results for Bucklin voting in the IC model for destructive control by deleting candidates. Number of voters is fixed.

	$n=4$						$n=8$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	241	349	453	415	349	247	251	385	481	465	394	340
# ci	259	151	47	1	0	0	249	115	19	0	0	0
# to	0	0	0	84	151	253	0	0	0	35	106	160
	$n=16$						$n=32$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	266	422	490	480	436	381	281	426	495	489	470	392
# ci	234	78	10	0	0	0	219	74	5	0	0	0
# to	0	0	0	20	64	119	0	0	0	11	30	108
	$n=64$						$n=128$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	286	430	497	495	478	434	276	441	496	493	475	458
# ci	214	70	3	0	0	0	224	59	4	0	0	0
# to	0	0	0	5	22	66	0	0	0	7	25	42

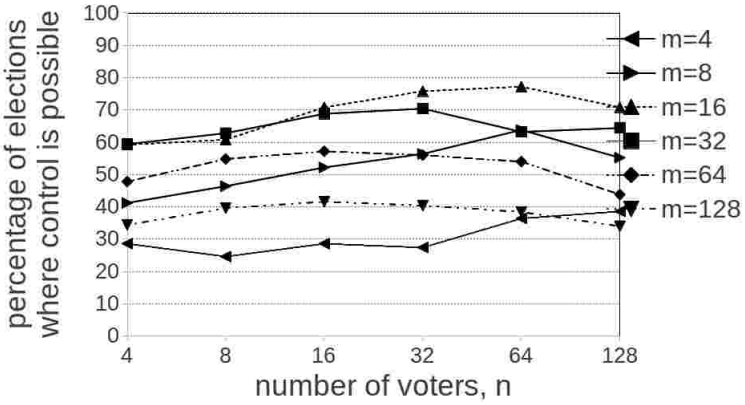


Figure 217: Results for Bucklin voting in the TM model for destructive control by deleting candidates. Number of candidates is fixed.

	$m=4$						$m=8$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	143	123	143	137	182	193	206	232	261	282	319	276
# ci	357	377	357	363	318	307	294	268	239	218	181	224
# to	0	0	0	0	0	0	0	0	0	0	0	0
	$m=16$						$m=32$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	296	304	354	379	386	354	297	314	344	352	316	322
# ci	204	196	146	121	114	146	146	129	78	46	18	14
# to	0	0	0	0	0	0	57	57	78	102	166	164
	$m=64$						$m=128$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	239	274	286	280	270	219	172	198	208	202	192	170
# ci	137	91	68	29	11	10	114	89	75	23	9	4
# to	124	135	146	191	219	271	214	213	217	275	299	326

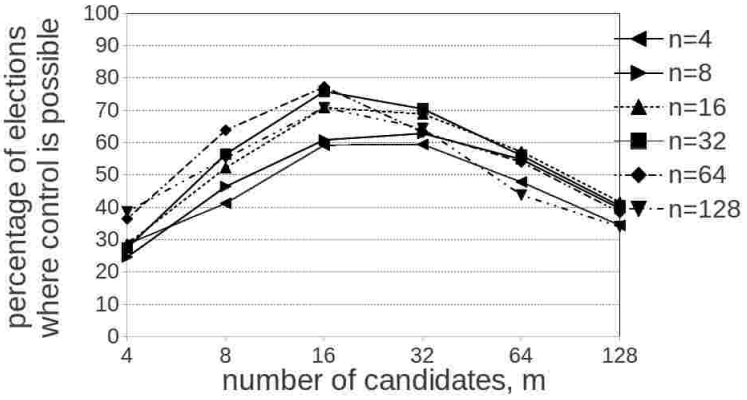


Figure 218: Results for Bucklin voting in the TM model for destructive control by deleting candidates. Number of voters is fixed.

	$n=4$						$n=8$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	143	206	296	297	239	172	123	232	304	314	274	198
# ci	357	294	204	146	137	114	377	268	196	129	91	89
# to	0	0	0	57	124	214	0	0	0	57	135	213
	$n=16$						$n=32$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	143	261	354	344	286	208	137	282	379	352	280	202
# ci	357	239	146	78	68	75	363	218	121	46	29	23
# to	0	0	0	78	146	217	0	0	0	102	191	275
	$n=64$						$n=128$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	182	319	386	316	270	192	193	276	354	322	219	170
# ci	318	181	114	18	11	9	307	224	146	14	10	4
# to	0	0	0	166	219	299	0	0	0	164	271	326

B.4.1. Computational Costs

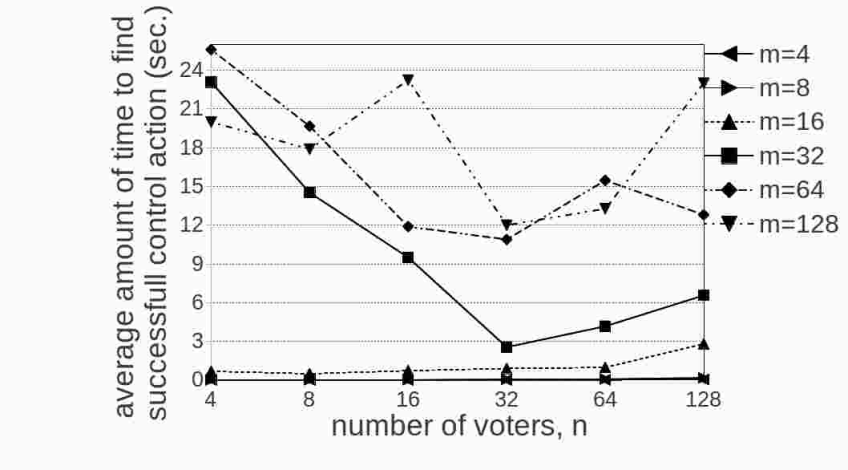


Figure 219: Average time the algorithm needs to find a successful control action for destructive control by deleting candidates in Bucklin elections in the IC model. The maximum is 25,59 seconds.

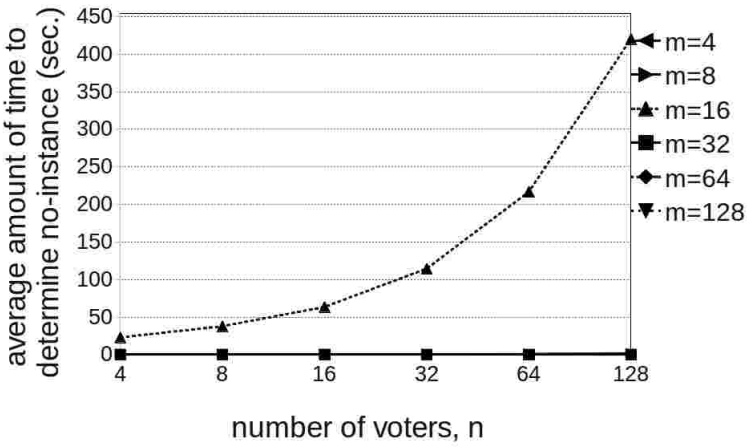


Figure 220: Average time the algorithm needs to determine no-instance of destructive control by deleting candidates in Bucklin elections in the IC model. The maximum is 420,05 seconds.

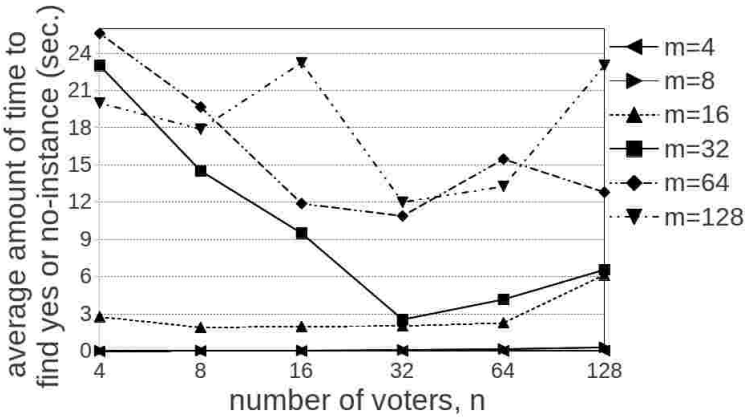


Figure 221: Average time the algorithm needs to give a definite output for destructive control by deleting candidates in Bucklin elections in the IC model. The maximum is 25,59 seconds.

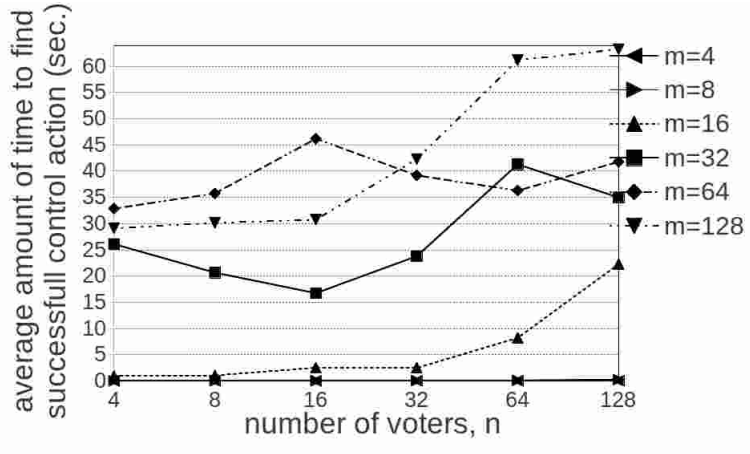


Figure 222: Average time the algorithm needs to find a successful control action for destructive control by deleting candidates in Bucklin elections in the TM model. The maximum is 63,26 seconds.

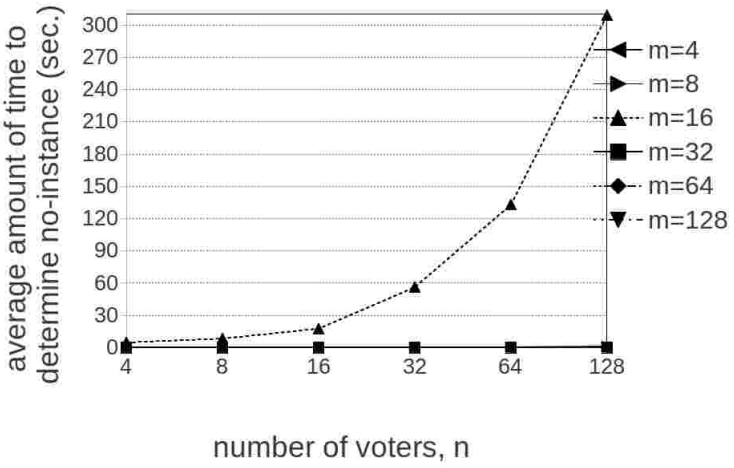


Figure 223: Average time the algorithm needs to determine no-instance of destructive control by deleting candidates in Bucklin elections in the TM model. The maximum is 309,1 seconds.

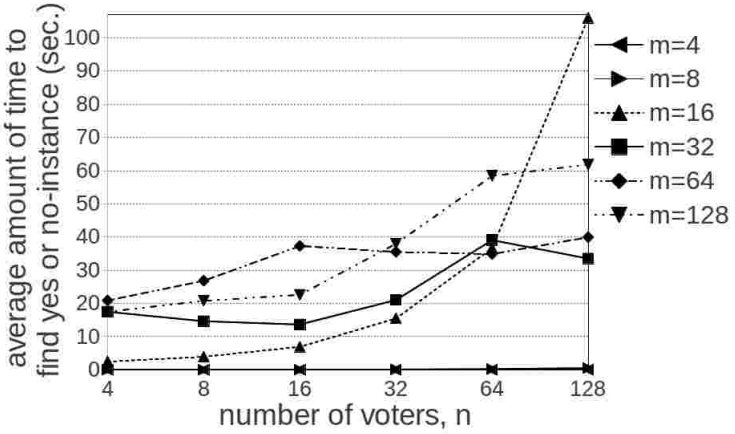


Figure 224: Average time the algorithm needs to give a definite output for destructive control by deleting candidates in Bucklin elections in the TM model. The maximum is 106,02 seconds.

B.5. Constructive Control by Partition of Candidates in Model TE

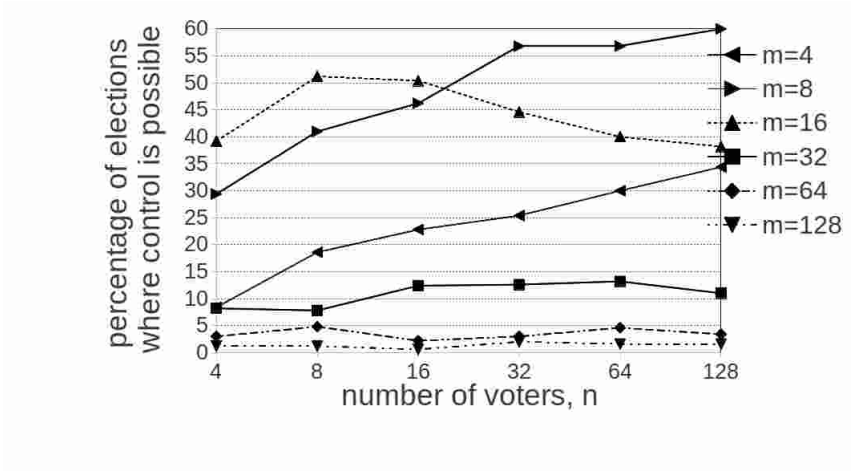


Figure 225: Results for Bucklin voting in the IC model for constructive control by partition of candidates in model TE. Number of voters is fixed.

	$m=4$						$m=8$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	42	93	114	127	150	172	147	205	231	284	284	300
# ci	458	407	386	373	350	328	353	295	269	216	216	200
# to	0	0	0	0	0	0	0	0	0	0	0	0
	$m=16$						$m=32$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	196	256	252	223	200	191	41	39	62	63	66	55
# ci	0	0	0	0	0	0	0	0	0	0	0	0
# to	304	244	248	277	300	309	459	461	438	437	434	445
	$m=64$						$m=128$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	15	24	11	15	23	17	6	6	3	10	8	8
# ci	0	0	0	0	0	0	0	0	0	0	0	0
# to	485	476	489	485	477	483	494	494	497	490	492	492

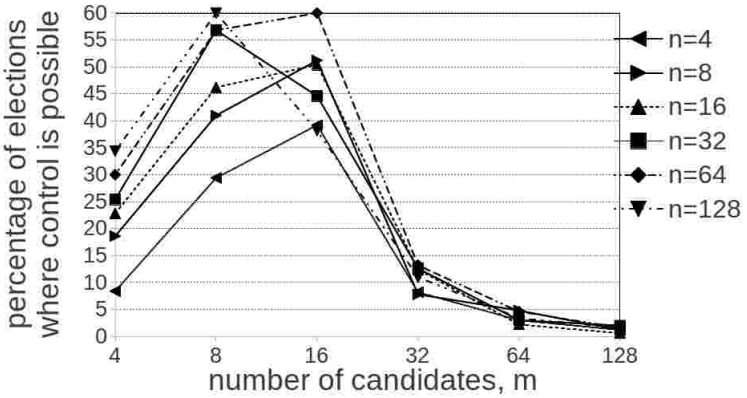


Figure 226: Results for Bucklin voting in the IC model for constructive control by partition of candidates in model TE. Number of voters is fixed.

	$n=4$						$n=8$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	42	147	196	41	15	6	93	205	256	39	24	6
# ci	458	353	0	0	0	0	407	295	0	0	0	0
# to	0	0	304	459	485	494	0	0	244	461	476	494
	$n=16$						$n=32$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	114	231	252	62	11	3	127	284	223	63	15	10
# ci	386	269	0	0	0	0	373	216	0	0	0	0
# to	0	0	248	438	489	497	0	0	277	437	485	490
	$n=64$						$n=128$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	150	284	200	66	23	8	172	300	191	55	17	8
# ci	350	216	0	0	0	0	328	200	0	0	0	0
# to	0	0	300	434	477	492	0	0	309	445	483	492

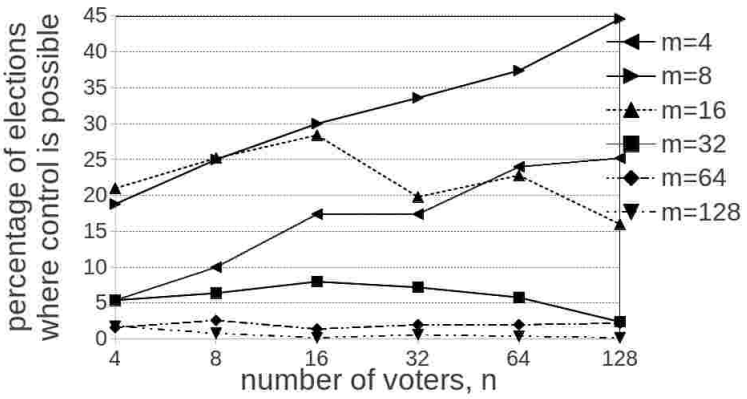


Figure 227: Results for Bucklin voting in the TM model for constructive control by partition of candidates in model TE. Number of candidates is fixed.

	$m=4$						$m=8$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	27	50	87	87	120	126	94	125	150	168	187	223
# ci	473	450	413	413	380	374	406	375	350	332	313	277
# to	0	0	0	0	0	0	0	0	0	0	0	0
	$m=16$						$m=32$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	105	126	142	99	114	80	27	32	40	36	29	120
# ci	0	0	0	0	0	0	0	0	0	0	0	0
# to	395	374	358	401	386	420	473	468	460	464	471	488
	$m=64$						$m=128$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	8	13	7	10	10	11	9	4	1	3	2	1
# ci	0	0	0	0	0	0	0	0	0	0	0	0
# to	492	487	493	490	490	489	491	496	499	497	498	499

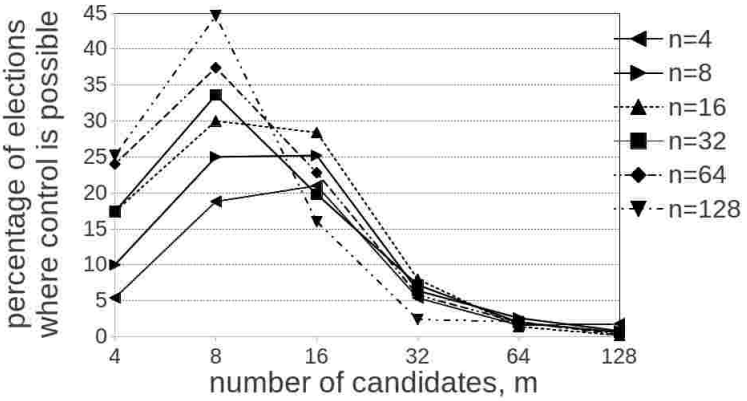


Figure 228: Results for Bucklin voting in the TM model for constructive control by partition of candidates in model TE. Number of voters is fixed.

	$n=4$						$n=8$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	27	94	105	27	8	9	50	125	126	32	13	4
# ci	473	406	0	0	0	0	450	375	0	0	0	0
# to	0	0	305	473	492	491	0	0	374	468	487	496
	$n=16$						$n=32$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	87	150	142	40	7	1	87	168	99	36	10	30
# ci	413	350	0	0	0	0	413	332	0	0	0	0
# to	0	0	358	460	493	499	0	0	401	464	490	497
	$n=64$						$n=128$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	120	187	114	29	10	2	126	223	80	12	11	1
# ci	380	313	0	0	0	0	374	277	0	0	0	0
# to	0	0	386	471	490	498	0	0	420	488	489	499

B.5.1. Computational Costs

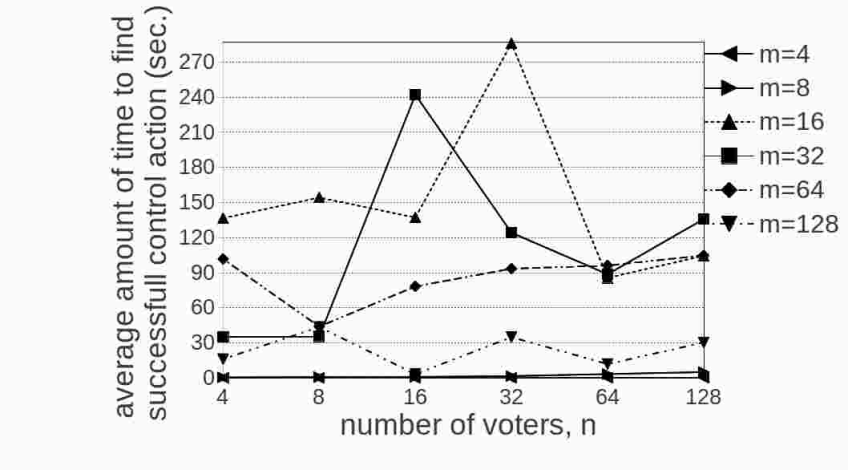


Figure 229: Average time the algorithm needs to find a successful control action for constructive control by partition of candidates in model TE in Bucklin elections in the IC model. The maximum is 286,05 seconds.

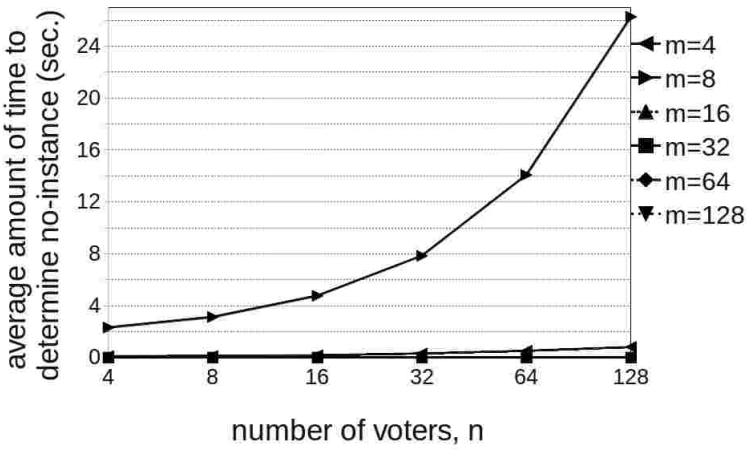


Figure 230: Average time the algorithm needs to determine no-instance of constructive control by partition of candidates in model TE in Bucklin elections in the IC model. The maximum is 26,26 seconds.

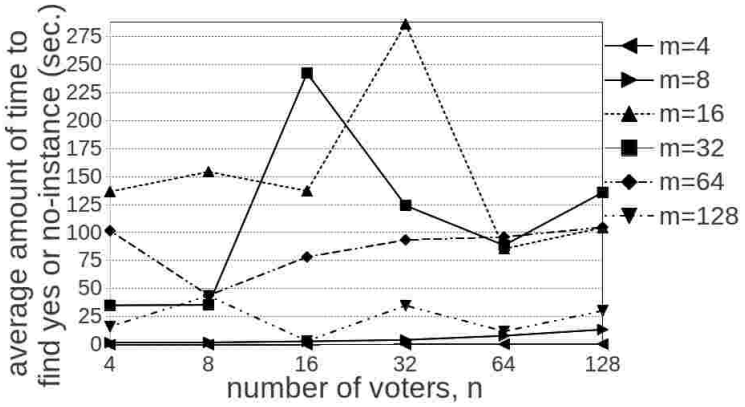


Figure 231: Average time the algorithm needs to give a definite output for constructive control by partition of candidates in model TE in Bucklin elections in the IC model. The maximum is 286,05 seconds.

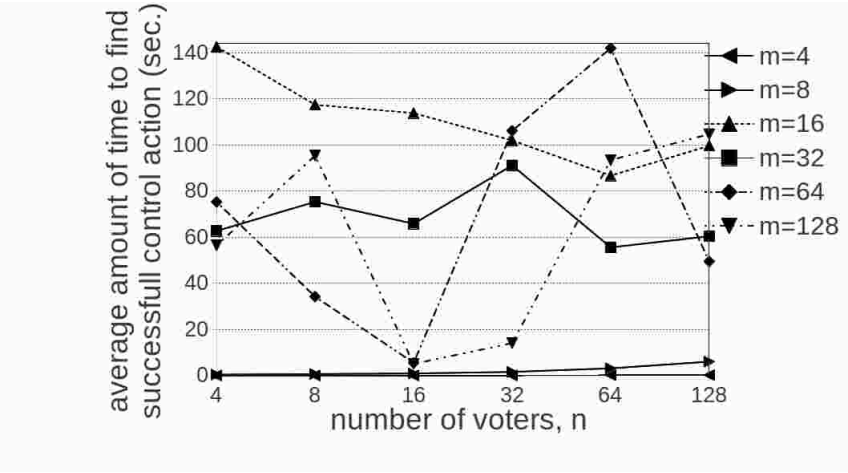


Figure 232: Average time the algorithm needs to find a successful control action for constructive control by partition of candidates in model TE in Bucklin elections in the TM model. The maximum is 142,58 seconds.

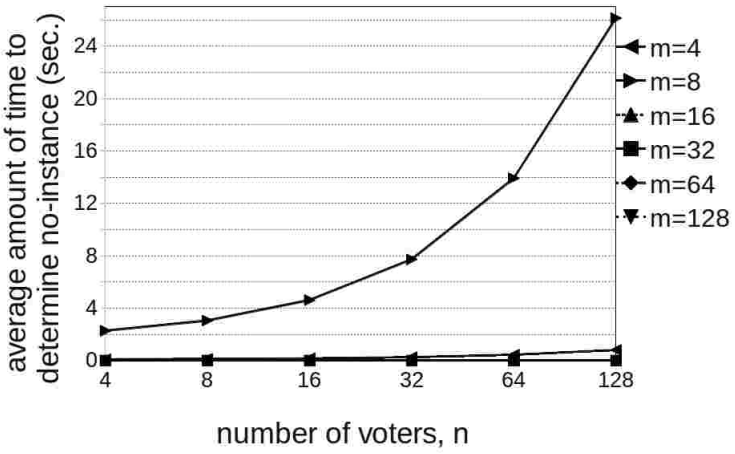


Figure 233: Average time the algorithm needs to determine no-instance of constructive control by partition of candidates in model TE in Bucklin elections in the TM model. The maximum is $26,14$ seconds.

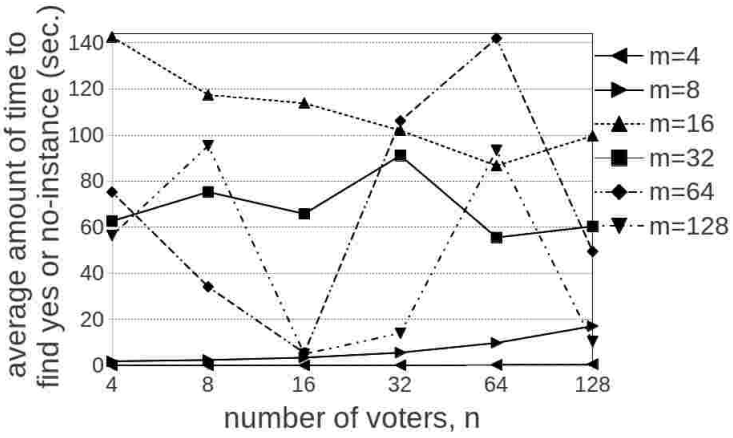


Figure 234: Average time the algorithm needs to give a definite output for constructive control by partition of candidates in model TE in Bucklin elections in the TM model. The maximum is $142,58$ seconds.

B.6. Destructive Control by Partition of Candidates in Model TE

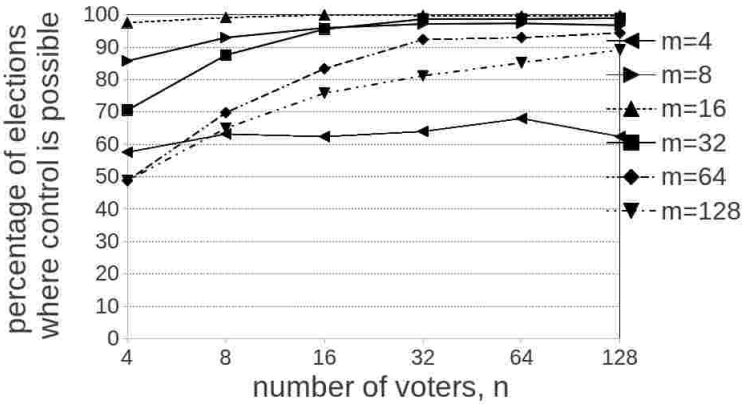


Figure 235: Results for Bucklin voting in the IC model for destructive control by partition of candidates in model TE. Number of candidates is fixed.

	$m=4$						$m=8$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	288	316	312	320	340	312	429	465	480	486	487	484
# ci	212	184	188	180	160	188	71	35	20	14	13	16
# to	0	0	0	0	0	0	0	0	0	0	0	0
	$m=16$						$m=32$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	488	496	500	499	498	499	353	438	478	494	494	495
# ci	4	0	0	0	0	0	1	0	0	0	0	0
# to	8	4	0	1	2	1	146	62	22	6	6	5
	$m=64$						$m=128$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	244	349	417	462	465	472	244	325	379	406	426	446
# ci	0	0	0	0	0	0	0	0	0	0	0	0
# to	356	151	83	38	35	28	256	175	121	94	74	54

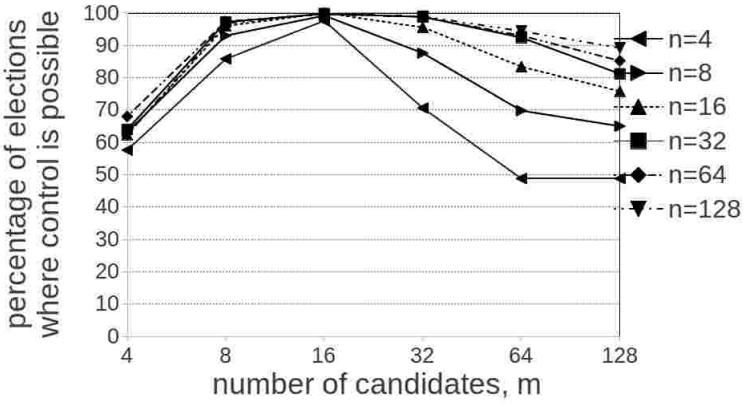


Figure 236: Results for Bucklin voting in the IC model for destructive control by partition of candidates in model TE. Number of voters is fixed.

	$n=4$						$n=8$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	288	429	488	353	244	244	316	465	496	438	349	325
# ci	212	71	4	1	0	0	184	35	0	0	0	0
# to	0	0	8	146	256	256	0	0	4	62	151	175
	$n=16$						$n=32$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	312	480	500	478	417	379	320	486	499	494	462	406
# ci	188	20	0	0	0	0	180	14	0	0	0	0
# to	0	0	0	22	83	121	0	0	1	6	38	94
	$n=64$						$n=128$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	340	487	498	494	465	426	312	484	499	495	472	446
# ci	160	13	0	0	0	0	188	16	0	0	0	0
# to	0	0	2	6	35	74	0	0	1	5	28	54

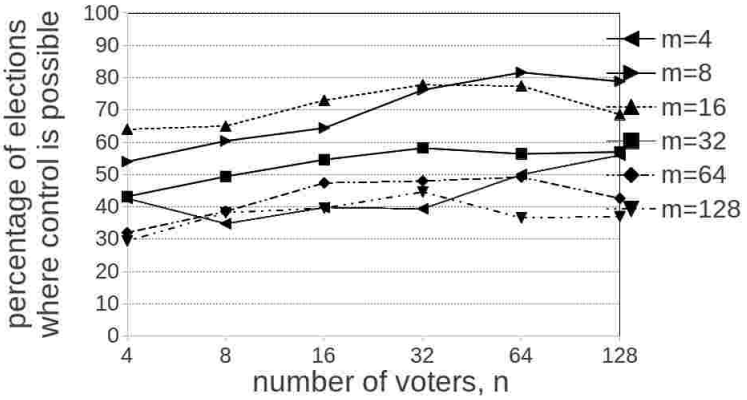


Figure 237: Results for Bucklin voting in the TM model for destructive control by partition of candidates in model TE. Number of candidates is fixed.

	$m=4$						$m=8$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	213	174	199	197	250	280	270	302	322	381	408	394
# ci	287	326	301	303	250	220	230	198	178	119	92	106
# to	0	0	0	0	0	0	0	0	0	0	0	0
	$m=16$						$m=32$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	320	325	365	389	387	343	216	247	273	291	282	285
# ci	165	152	105	61	43	37	146	129	78	46	18	14
# to	15	23	3	50	70	120	138	124	149	163	200	201
	$m=64$						$m=128$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	160	193	237	240	246	213	147	191	198	223	183	185
# ci	137	91	68	29	11	10	114	89	75	23	9	4
# to	203	216	195	231	243	277	239	220	227	254	308	311

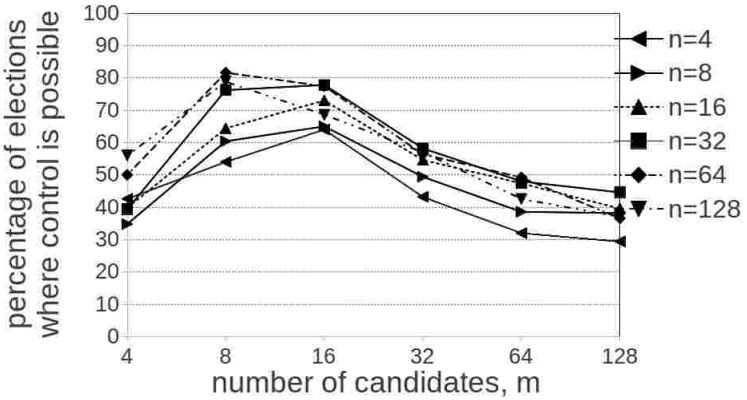


Figure 238: Results for Bucklin voting in the TM model for destructive control by partition of candidates in model TE. Number of voters is fixed.

	$n=4$						$n=8$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	213	270	320	216	160	147	174	302	325	247	193	191
# ci	287	230	165	146	114	114	326	198	152	129	91	89
# to	0	0	15	138	203	239	0	0	23	124	216	220
	$n=16$						$n=32$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	199	322	365	273	237	198	197	381	389	291	240	223
# ci	301	178	105	78	68	75	303	119	61	46	29	23
# to	0	0	30	149	195	227	0	0	50	163	231	254
	$n=64$						$n=128$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	250	408	387	282	246	183	280	394	343	285	213	185
# ci	250	92	43	18	11	9	220	106	37	14	10	4
# to	0	0	70	200	243	308	0	0	120	201	277	311

B.6.1. Computational Costs

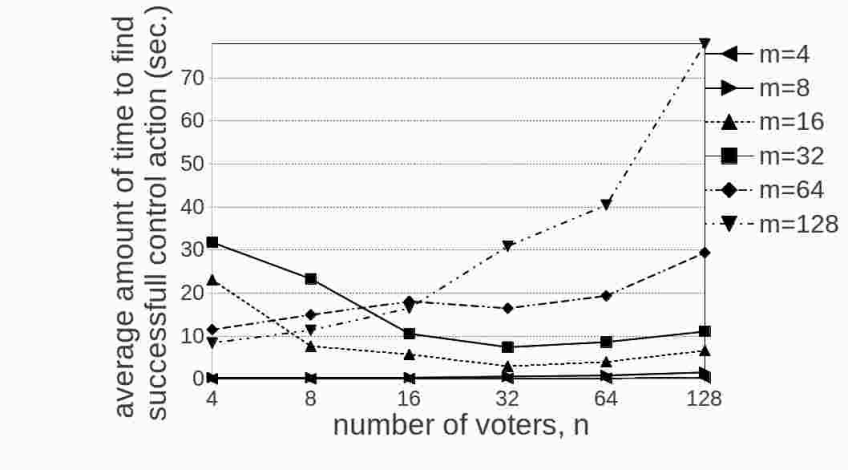


Figure 239: Average time the algorithm needs to find a successful control action for destructive control by partition of candidates in model TE in Bucklin elections in the IC model. The maximum is 36,79 seconds.

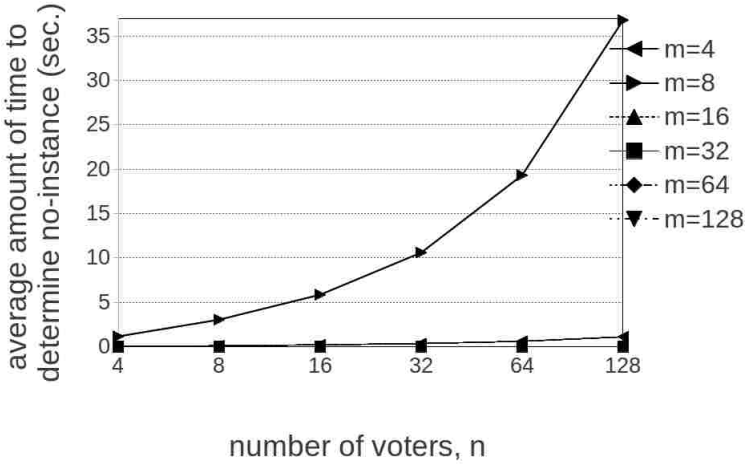


Figure 240: Average time the algorithm needs to determine no-instance of destructive control by partition of candidates in model TE in Bucklin elections in the IC model. The maximum is 77,9 seconds.

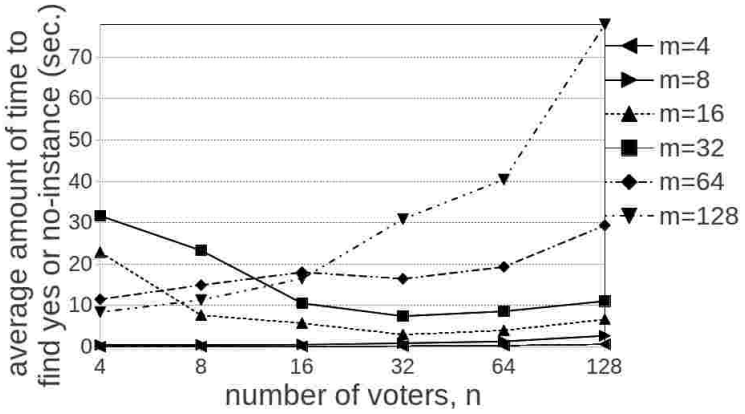


Figure 241: Average time the algorithm needs to give a definite output for destructive control by partition of candidates in model TE in Bucklin elections in the IC model. The maximum is $77,9$ seconds.

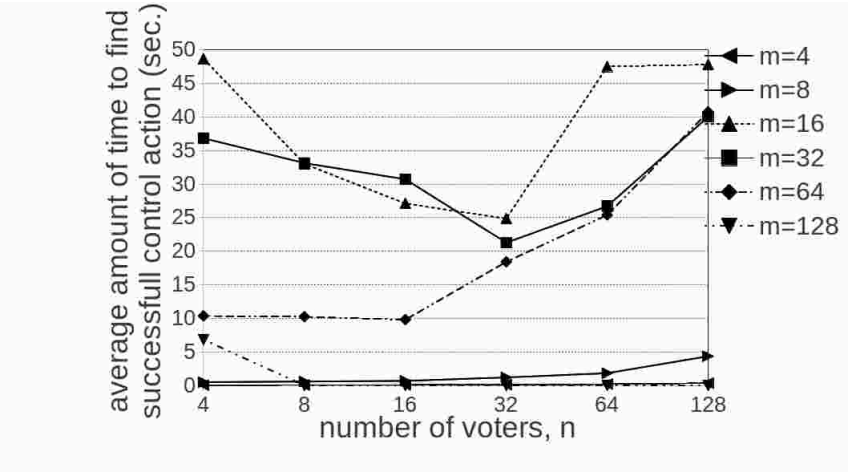


Figure 242: Average time the algorithm needs to find a successful control action for destructive control by partition of candidates in model TE in Bucklin elections in the TM model. The maximum is $48,67$ seconds.

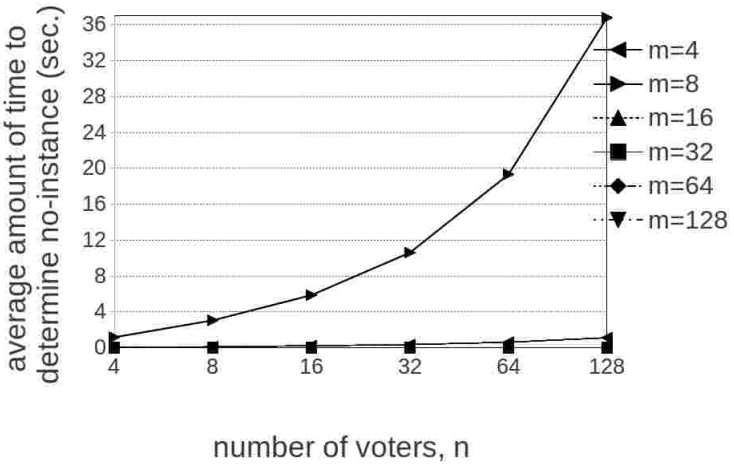


Figure 243: Average time the algorithm needs to determine no-instance of destructive control by partition of candidates in model TE in Bucklin elections in the TM model. The maximum is 36,79 seconds.

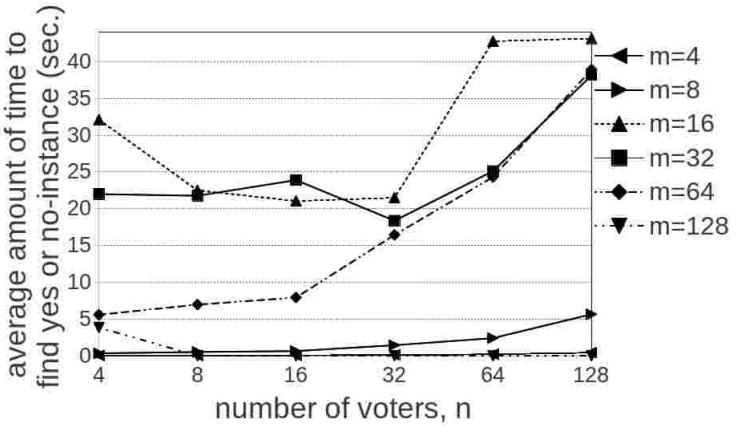


Figure 244: Average time the algorithm needs to give a definite output for destructive control by partition of candidates in model TE in Bucklin elections in the TM model. The maximum is 43,14 seconds.

B.7. Constructive Control by Partition of Candidates in Model TP

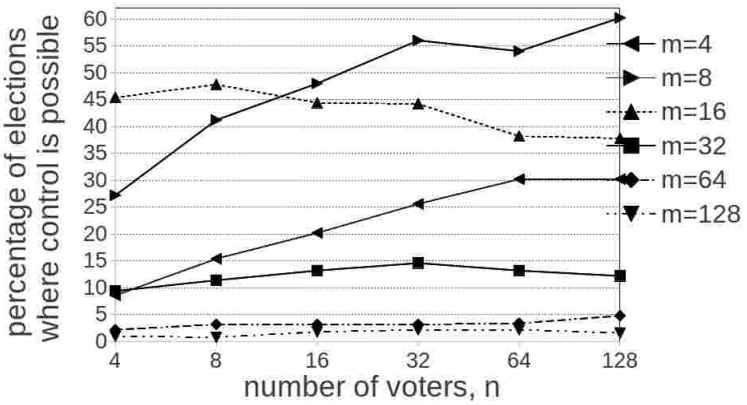


Figure 245: Results for Bucklin voting in the IC model for constructive control by partition of candidates in model TP. Number of candidates is fixed.

	$m=4$						$m=8$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	43	77	101	128	151	151	136	206	240	280	270	301
# ci	457	423	399	372	349	349	364	294	260	220	230	199
# to	0	0	0	0	0	0	0	0	0	0	0	0
	$m=16$						$m=32$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	227	239	222	221	191	189	47	57	66	73	66	61
# ci	0	0	0	0	0	0	0	0	0	0	0	0
# to	273	261	278	279	309	311	453	443	434	427	434	439
	$m=64$						$m=128$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	11	16	16	16	17	24	5	4	9	11	11	8
# ci	0	0	0	0	0	0	0	0	0	0	0	0
# to	489	484	484	484	483	476	495	496	491	489	489	492

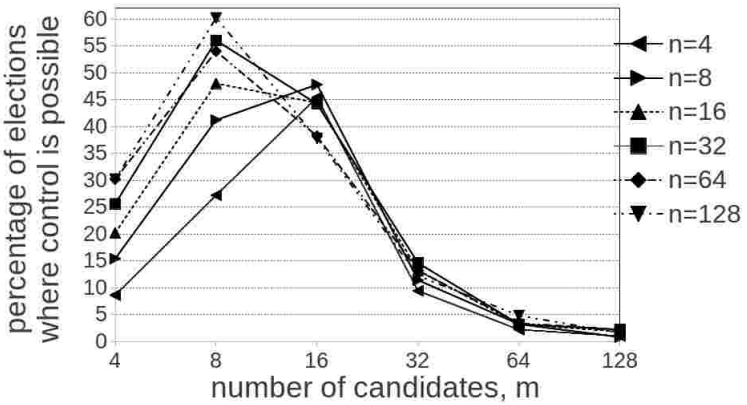


Figure 246: Results for Bucklin voting in the IC model for constructive control by partition of candidates in model TP. Number of voters is fixed.

	$n=4$						$n=8$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	43	136	227	47	11	5	77	206	239	57	16	4
# ci	457	364	0	0	0	0	423	294	0	0	0	0
# to	0	0	273	453	489	495	0	0	261	443	484	496
	$n=16$						$n=32$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	101	240	222	66	16	9	128	280	221	73	16	11
# ci	399	260	0	0	0	0	372	220	0	0	0	0
# to	0	0	278	434	484	491	0	0	279	427	484	489
	$n=64$						$n=128$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	151	270	191	66	17	11	151	301	189	61	24	8
# ci	349	230	0	0	0	0	349	199	0	0	0	0
# to	0	0	309	434	483	489	0	0	311	439	476	492

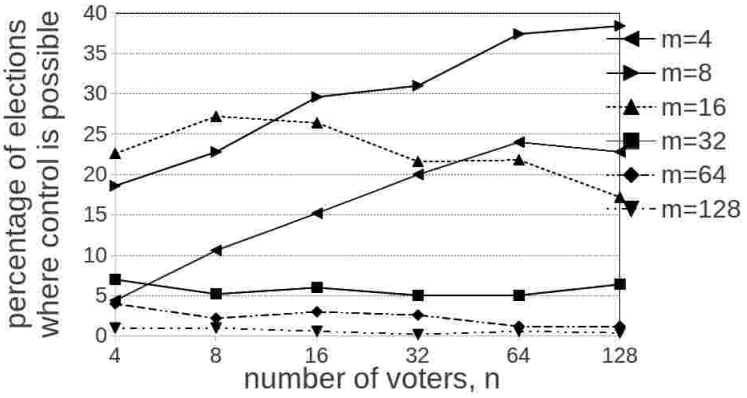


Figure 247: Results for Bucklin voting in the TM model for constructive control by partition of candidates in model TP. Number of candidates is fixed.

	$m=4$						$m=8$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	22	53	76	100	120	114	93	114	148	155	187	192
# ci	478	447	424	400	380	386	407	386	352	345	313	308
# to	0	0	0	0	0	0	0	0	0	0	0	0
	$m=16$						$m=32$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	113	136	132	108	109	86	35	26	30	25	25	32
# ci	0	0	0	0	0	0	0	0	0	0	0	0
# to	387	364	368	392	391	414	465	474	470	475	475	468
	$m=64$						$m=128$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	20	11	15	13	6	6	5	5	3	1	3	2
# ci	0	0	0	0	0	0	0	0	0	0	0	0
# to	480	489	485	487	494	494	495	495	497	499	497	498

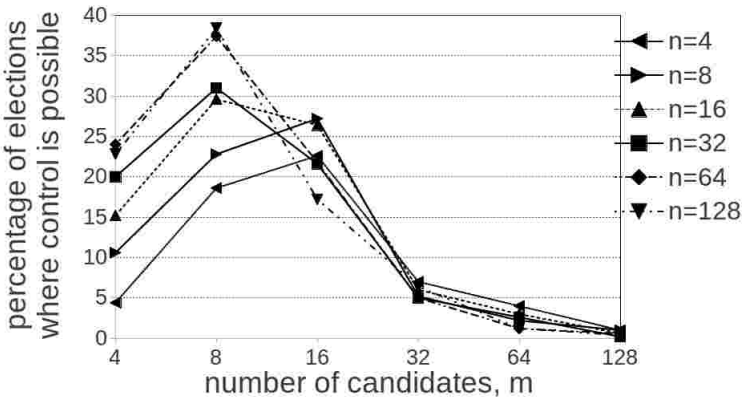


Figure 248: Results for Bucklin voting in the TM model for constructive control by partition of candidates in model TP. Number of voters is fixed.

	$n=4$						$n=8$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	22	93	113	35	20	5	53	114	136	26	11	5
# ci	478	407	0	0	0	0	447	386	0	0	0	0
# to	0	0	387	465	480	495	0	0	364	474	489	495
	$n=16$						$n=32$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	76	148	132	30	15	3	100	155	108	25	13	1
# ci	424	352	0	0	0	0	400	345	0	0	0	0
# to	0	0	368	470	485	497	0	0	392	475	487	499
	$n=64$						$n=128$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	120	187	109	25	6	3	114	192	86	32	6	2
# ci	38	313	0	0	0	0	386	308	0	0	0	0
# to	0	0	391	475	494	497	0	0	414	468	494	498

B.7.1. Computational Costs

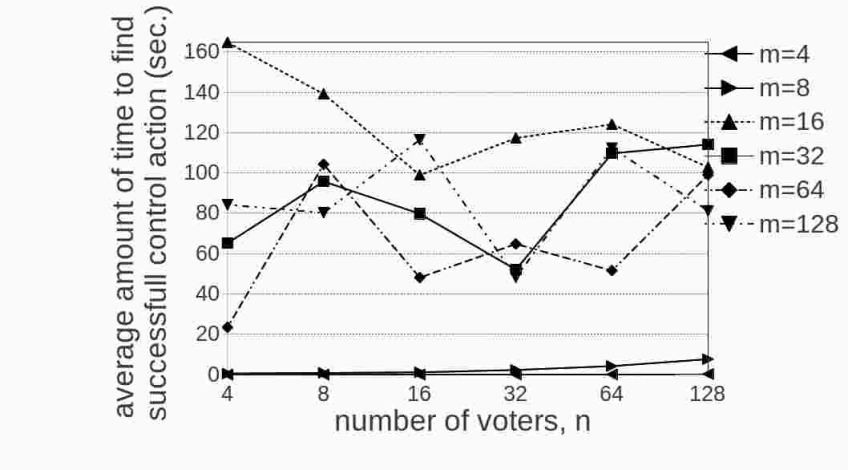


Figure 249: Average time the algorithm needs to find a successful control action for constructive control by partition of candidates in model TP in Bucklin elections in the IC model. The maximum is 164,65 seconds.

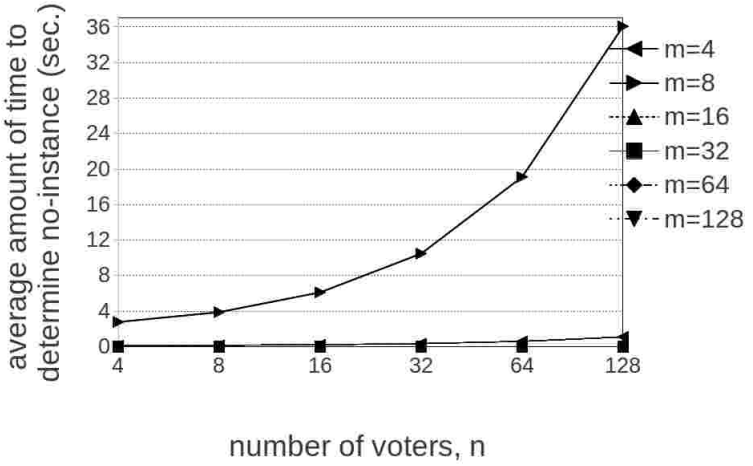


Figure 250: Average time the algorithm needs to determine no-instance of constructive control by partition of candidates in model TP in Bucklin elections in the IC model. The maximum is 36,09 seconds.

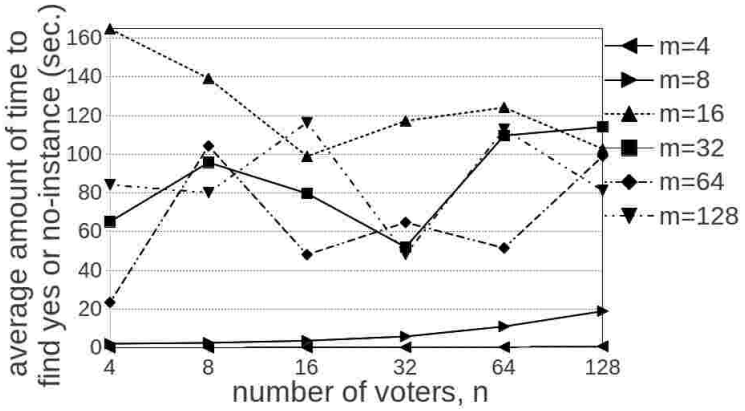


Figure 251: Average time the algorithm needs to give a definite output for constructive control by partition of candidates in model TP in Bucklin elections in the IC model. The maximum is 164,65 seconds.

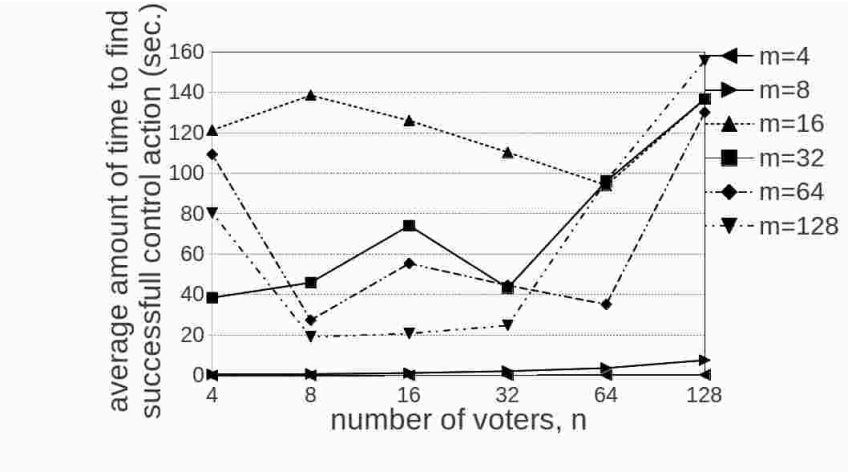


Figure 252: Average time the algorithm needs to find a successful control action for constructive control by partition of candidates in model TP in Bucklin elections in the TM model. The maximum is 155,73 seconds.

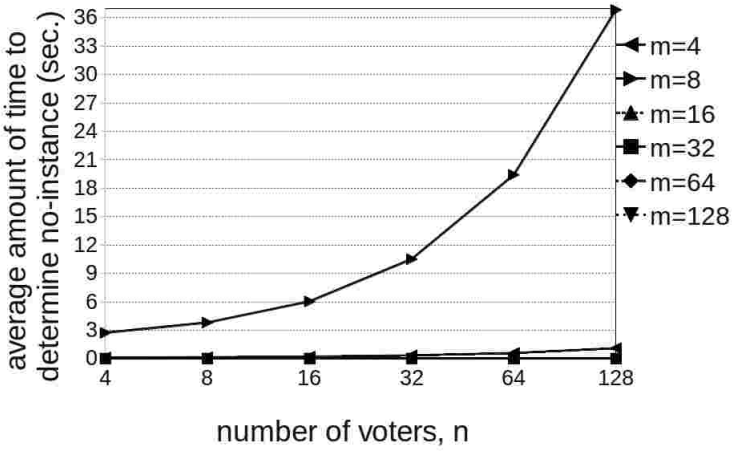


Figure 253: Average time the algorithm needs to determine no-instance of constructive control by partition of candidates in model TP in Bucklin elections in the TM model. The maximum is $36,83$ seconds.

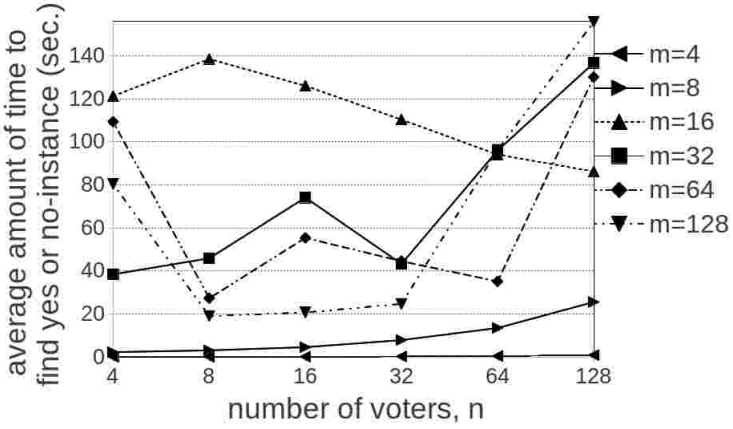


Figure 254: Average time the algorithm needs to give a definite output for constructive control by partition of candidates in model TP in Bucklin elections in the TM model. The maximum is $155,73$ seconds.

B.8. Destructive Control by Partition of Candidates in Model TP

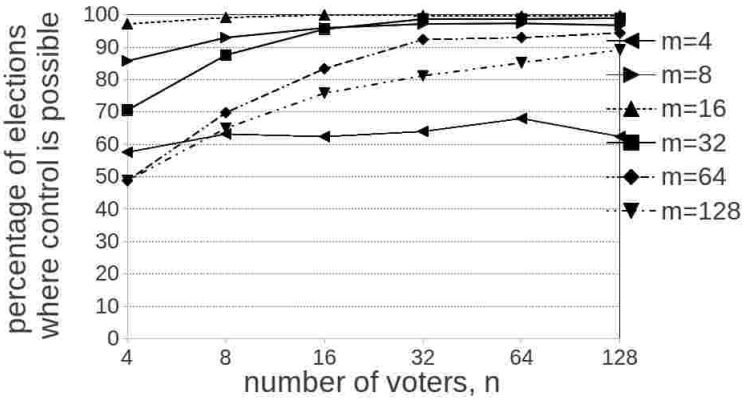


Figure 255: Results for Bucklin voting in the IC model for destructive control by partition of candidates in model TP. Number of candidates is fixed.

	$m=4$						$m=8$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	288	316	312	320	340	312	429	465	480	486	487	484
# ci	212	184	188	180	160	188	71	35	20	14	13	16
# to	0	0	0	0	0	0	0	0	0	0	0	0
	$m=16$						$m=32$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	486	496	500	499	498	499	353	438	478	494	494	495
# ci	4	0	0	0	0	0	1	0	0	0	0	0
# to	10	4	0	1	2	1	146	62	22	6	6	5
	$m=64$						$m=128$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	244	349	417	462	465	472	244	325	379	406	426	446
# ci	0	0	0	0	0	0	0	0	0	0	0	0
# to	256	151	83	38	35	28	256	175	121	94	74	54

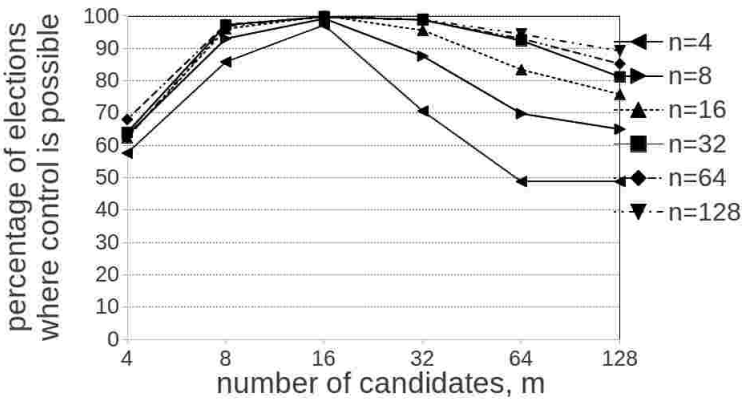


Figure 256: Results for Bucklin voting in the IC model for destructive control by partition of candidates in model TP. Number of voters is fixed.

	$n=4$						$n=8$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	288	429	486	353	244	244	316	465	496	438	349	325
# ci	212	71	4	1	0	0	184	35	0	0	0	0
# to	0	0	10	146	256	256	0	0	4	62	151	175
	$n=16$						$n=32$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	312	480	500	478	417	379	320	486	499	494	462	406
# ci	188	20	0	0	0	0	180	14	0	0	0	0
# to	0	0	0	22	83	121	0	0	1	6	38	94
	$n=64$						$n=128$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	340	487	498	494	465	426	312	484	499	495	472	446
# ci	160	13	0	0	0	0	188	16	0	0	0	0
# to	0	0	2	6	35	74	0	0	1	5	28	54

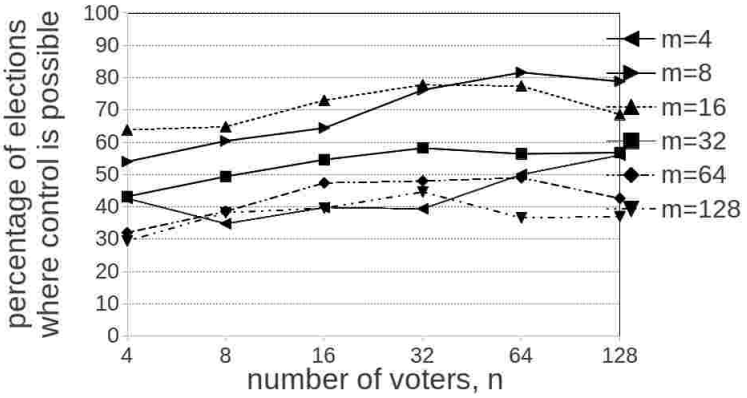


Figure 257: Results for Bucklin voting in the TM model for destructive control by partition of candidates in model TP. Number of candidates is fixed.

	$m=4$						$m=8$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	213	174	199	197	250	280	270	302	322	381	408	394
# ci	287	326	301	303	250	220	230	198	178	119	92	106
# to	0	0	0	0	0	0	0	0	0	0	0	0
	$m=16$						$m=32$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	319	324	365	389	387	343	216	247	273	291	282	284
# ci	165	152	105	61	43	37	146	129	78	46	18	14
# to	16	24	30	50	70	120	138	124	149	163	200	202
	$m=64$						$m=128$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	160	193	237	240	245	213	147	191	198	223	183	185
# ci	137	91	68	29	11	10	114	89	75	23	9	4
# to	203	216	195	231	244	277	239	220	227	254	308	311

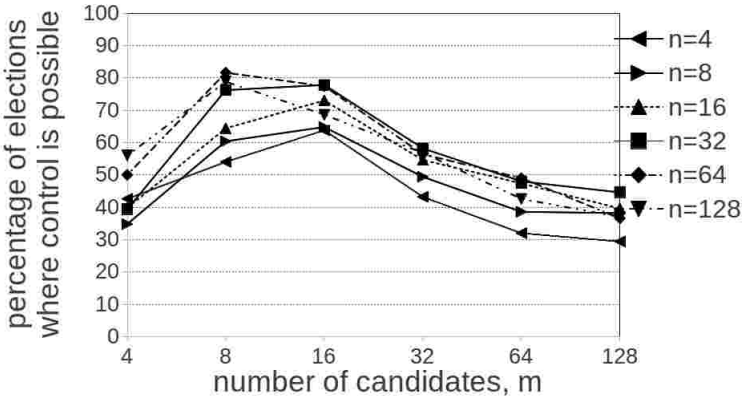


Figure 258: Results for Bucklin voting in the TM model for destructive control by partition of candidates in model TP. Number of voters is fixed.

	$n=4$						$n=8$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	213	270	319	216	160	147	174	302	324	247	193	191
# ci	287	230	165	146	137	114	326	198	152	129	91	89
# to	0	0	16	138	203	239	0	0	24	124	216	220
	$n=16$						$n=32$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	199	322	365	273	237	198	197	381	389	291	240	223
# ci	301	178	105	78	68	75	303	119	61	46	29	23
# to	0	0	30	149	195	227	0	0	50	163	231	254
	$n=64$						$n=128$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	250	408	387	282	245	183	280	394	343	284	213	185
# ci	250	92	43	18	11	9	220	106	37	14	10	4
# to	0	0	70	200	244	308	0	0	120	202	277	311

B.8.1. Computational Costs

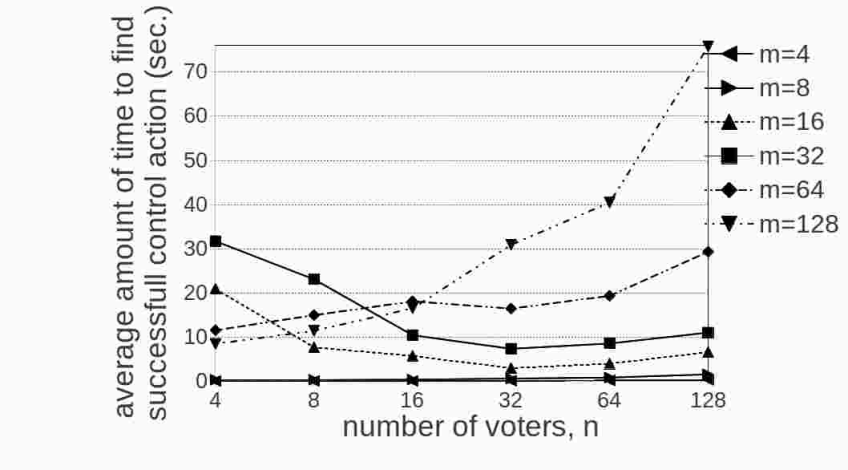


Figure 259: Average time the algorithm needs to find a successful control action for destructive control by partition of candidates in model TP in Bucklin elections in the IC model. The maximum is $75,81$ seconds.

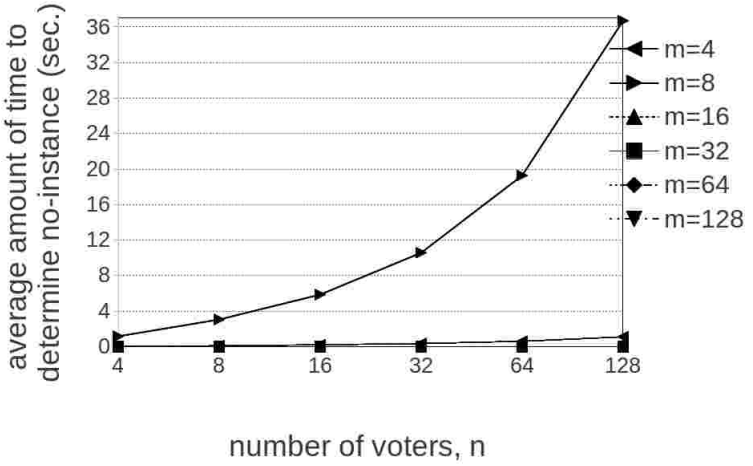


Figure 260: Average time the algorithm needs to determine no-instance of destructive control by partition of candidates in model TP in Bucklin elections in the IC model. The maximum is $36,71$ seconds.

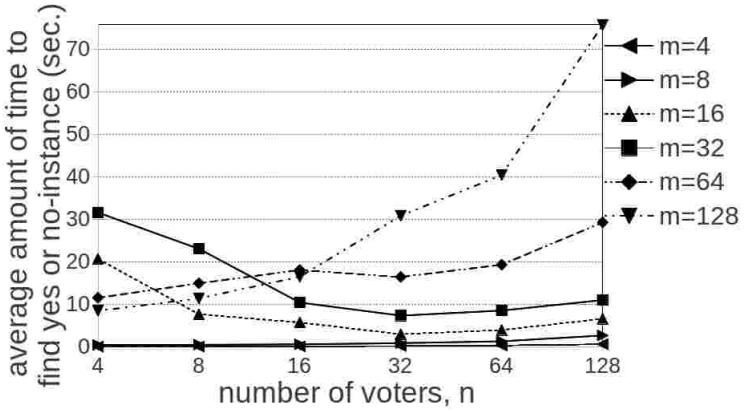


Figure 261: Average time the algorithm needs to give a definite output for destructive control by partition of candidates in model TP in Bucklin elections in the IC model. The maximum is $75,81$ seconds.

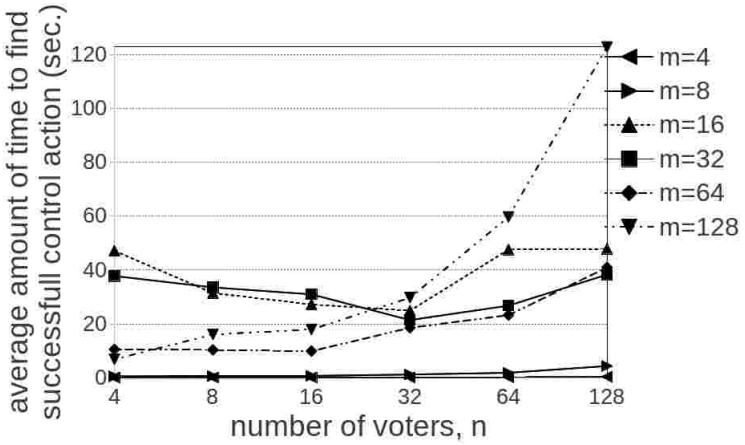


Figure 262: Average time the algorithm needs to find a successful control action for destructive control by partition of candidates in model TP in Bucklin elections in the TM model. The maximum is $122,89$ seconds.

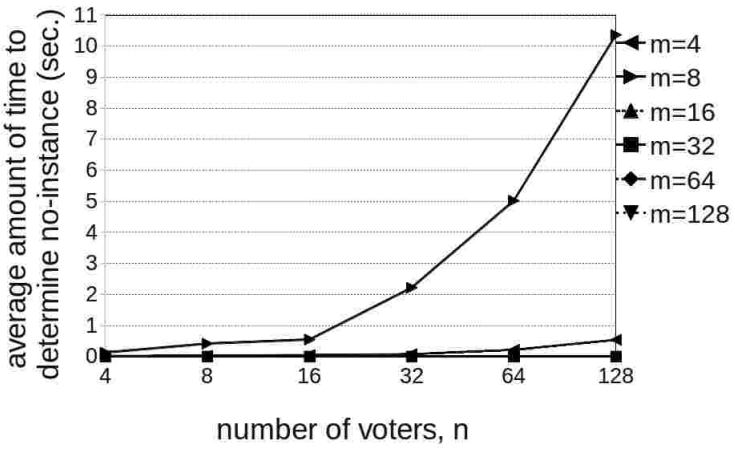


Figure 263: Average time the algorithm needs to determine no-instance of destructive control by partition of candidates in model TP in Bucklin elections in the TM model. The maximum is $10,36$ seconds.

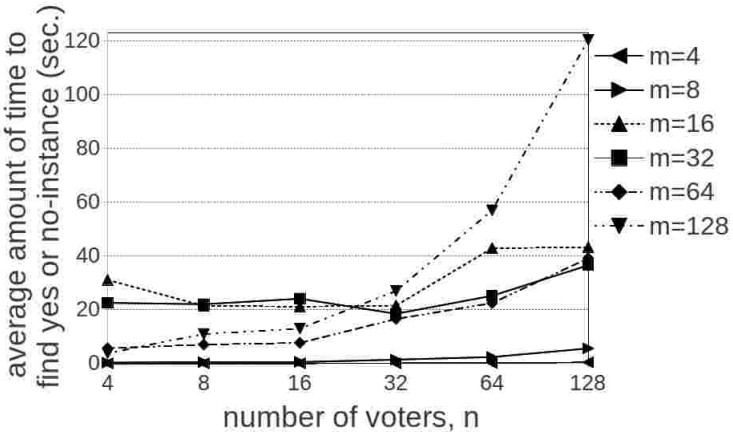


Figure 264: Average time the algorithm needs to give a definite output for destructive control by partition of candidates in model TP in Bucklin elections in the TM model. The maximum is $120,28$ seconds.

B.9. Constructive Control by Runoff Partition of Candidates in Model TE

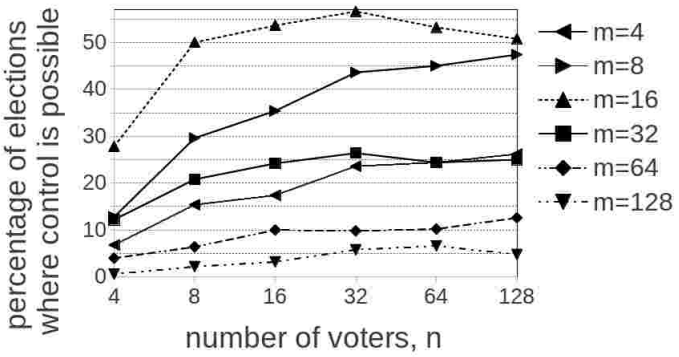


Figure 265: Results for Bucklin voting in the IC model for constructive control by runoff-partition of candidates in model TE. Number of candidates is fixed.

	$m=4$						$m=8$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	34	77	87	118	122	131	64	148	177	218	225	237
# ci	466	423	413	382	378	369	436	352	323	282	275	263
# to	0	0	0	0	0	0	0	0	0	0	0	0
	$m=16$						$m=32$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	139	250	268	283	266	254	61	104	121	132	122	125
# ci	0	0	0	0	0	0	0	0	0	0	0	0
# to	361	250	232	217	234	246	439	396	379	368	378	375
	$m=64$						$m=128$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	20	32	50	49	51	63	3	11	16	29	33	24
# ci	0	0	0	0	0	0	0	0	0	0	0	0
# to	480	468	450	451	449	437	497	489	484	471	467	476

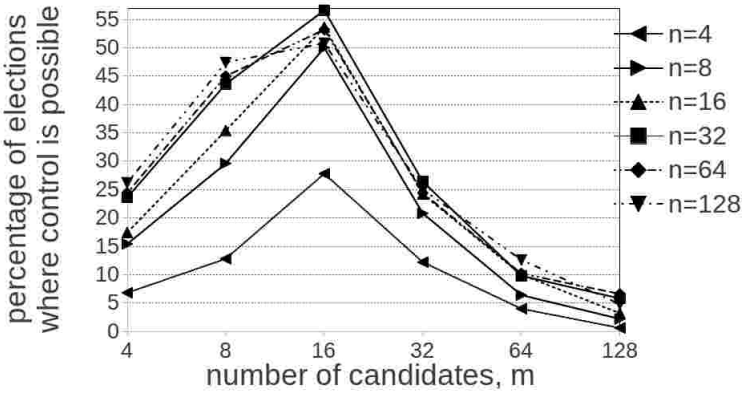


Figure 266: Results for Bucklin voting in the IC model for constructive control by runoff-partition of candidates in model TE. Number of voters is fixed.

	$n=4$						$n=8$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	34	64	139	61	20	3	77	148	250	104	32	11
# ci	466	436	0	0	0	0	423	352	0	0	0	0
# to	0	0	361	439	480	497	0	0	250	396	468	489
	$n=16$						$n=32$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	87	177	268	121	50	16	118	218	283	132	49	29
# ci	413	323	0	0	0	0	382	282	0	0	0	0
# to	0	0	232	379	450	484	0	0	217	368	451	471
	$n=64$						$n=128$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	122	225	266	122	51	33	131	237	254	125	63	24
# ci	378	275	0	0	0	0	369	263	0	0	0	0
# to	0	0	234	378	449	467	0	0	246	375	437	476

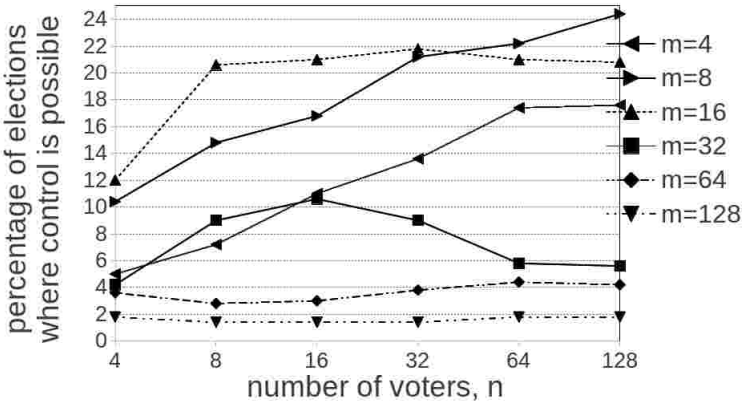


Figure 267: Results for Bucklin voting in the TM model for constructive control by runoff-partition of candidates in model TE. Number of candidates is fixed.

	$m=4$						$m=8$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	25	36	55	68	87	88	52	74	84	106	111	122
# ci	475	464	445	432	413	412	448	426	416	394	389	378
# to	0	0	0	0	0	0	0	0	0	0	0	0
	$m=16$						$m=32$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	60	103	105	109	105	104	21	45	53	45	29	28
# ci	0	0	0	0	0	0	0	0	0	0	0	0
# to	440	397	395	391	395	396	479	455	447	455	471	472
	$m=64$						$m=128$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	18	14	15	19	22	21	9	7	7	7	9	9
# ci	0	0	0	0	0	0	0	0	0	0	0	0
# to	482	486	485	481	478	479	491	493	493	493	491	491

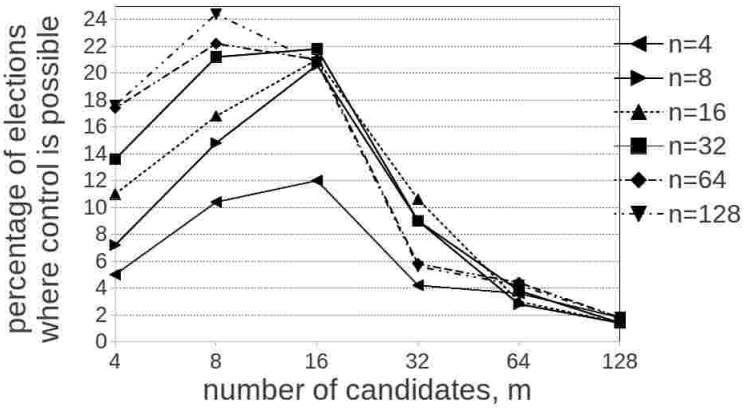


Figure 268: Results for Bucklin voting in the TM model for constructive control by runoff-partition of candidates in model TE. Number of voters is fixed.

	$n=4$						$n=8$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	25	52	60	21	18	9	36	74	103	45	14	7
# ci	475	448	0	0	0	0	464	426	0	0	0	0
# to	0	0	440	479	482	491	0	0	397	455	486	493
	$n=16$						$n=32$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	55	84	105	53	15	7	68	106	109	45	19	7
# ci	445	416	0	0	0	0	432	394	0	0	0	0
# to	0	0	395	447	485	493	0	0	391	455	481	493
	$n=64$						$n=128$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	87	111	105	29	22	9	88	122	104	28	21	9
# ci	413	389	0	0	0	0	412	378	0	0	0	0
# to	0	0	395	471	478	491	0	0	396	472	479	491

B.9.1. Computational Costs

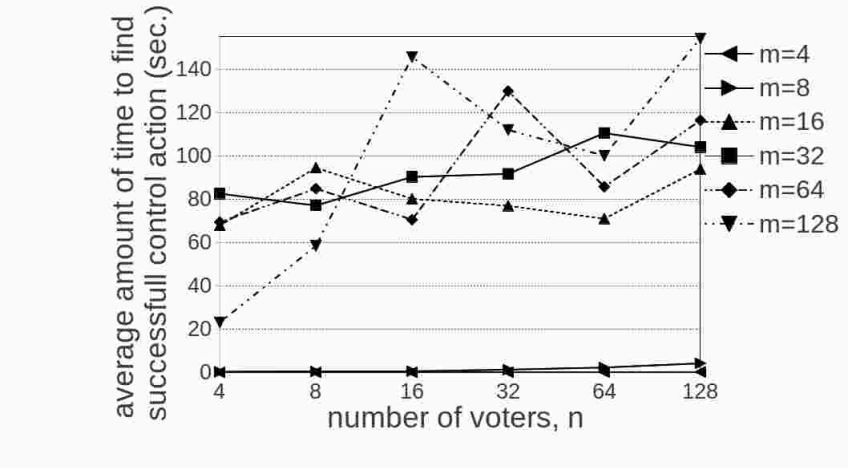


Figure 269: Average time the algorithm needs to find a successful control action for constructive control by runoff-partition of candidates in model TE in Bucklin elections in the IC model. The maximum is $154,23$ seconds.

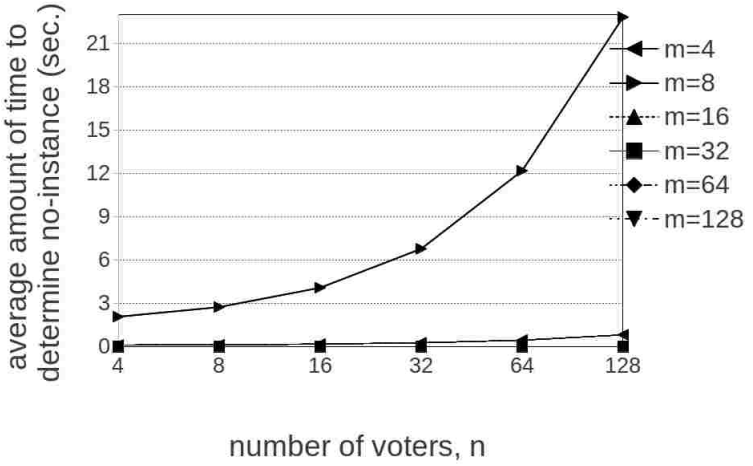


Figure 270: Average time the algorithm needs to determine no-instance of constructive control by runoff-partition of candidates in model TE in Bucklin elections in the IC model. The maximum is $22,8$ seconds.

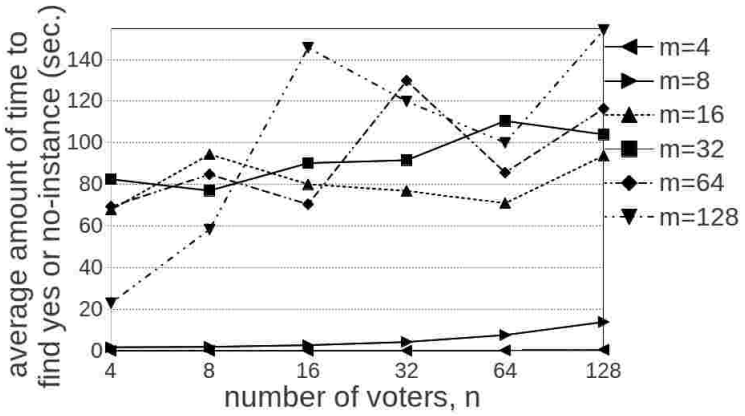


Figure 271: Average time the algorithm needs to give a definite output for constructive control by runoff-partition of candidates in model TE in Bucklin elections in the IC model. The maximum is $154,23$ seconds.

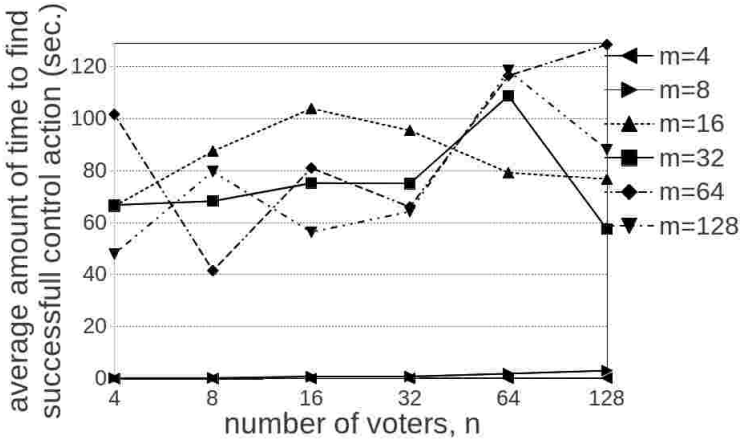


Figure 272: Average time the algorithm needs to find a successful control action for constructive control by runoff-partition of candidates in model TE in Bucklin elections in the TM model. The maximum is $128,41$ seconds.

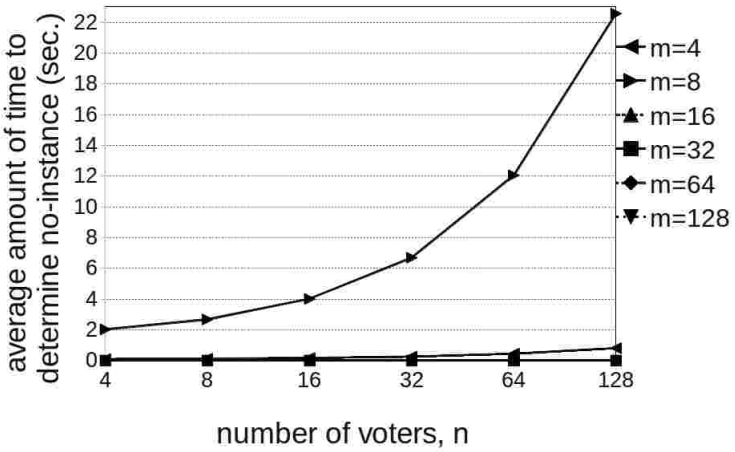


Figure 273: Average time the algorithm needs to determine no-instance of constructive control by runoff-partition of candidates in model TE in Bucklin elections in the TM model. The maximum is $22,56$ seconds.

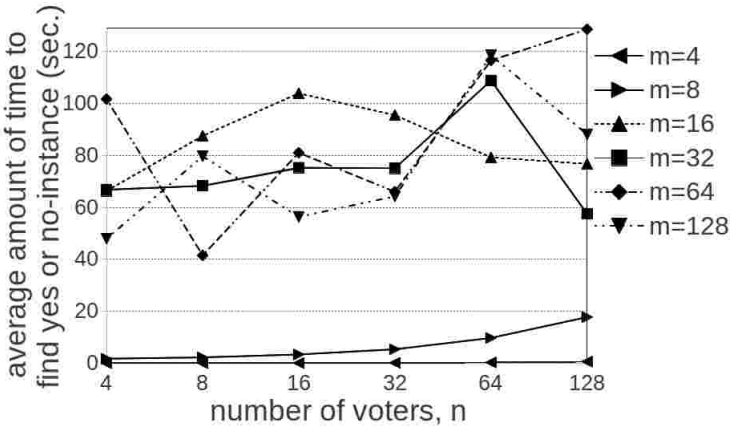


Figure 274: Average time the algorithm needs to give a definite output for constructive control by runoff-partition of candidates in model TE in Bucklin elections in the TM model. The maximum is $128,41$ seconds.

B.10. Destructive Control by Runoff Partition of Candidates in Model TE

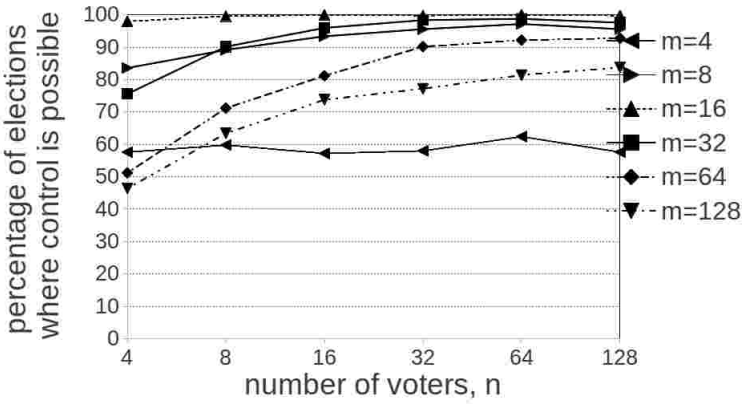


Figure 275: Results for Bucklin voting in the IC model for destructive control by runoff-partition of candidates in model TE. Number of candidates is fixed.

	$m=4$						$m=8$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	288	299	286	290	312	288	418	446	467	478	486	478
# ci	212	201	214	210	188	212	82	54	33	22	14	22
# to	0	0	0	0	0	0	0	0	0	0	0	0
	$m=16$						$m=32$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	490	498	500	499	500	499	378	451	480	492	494	488
# ci	4	0	0	0	0	0	1	0	0	0	0	0
# to	6	2	0	1	0	1	121	49	20	8	6	12
	$m=64$						$m=128$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	256	356	406	451	461	464	232	317	369	386	407	419
# ci	0	0	0	0	0	0	0	0	0	0	0	0
# to	244	144	94	49	39	36	268	183	131	114	93	81

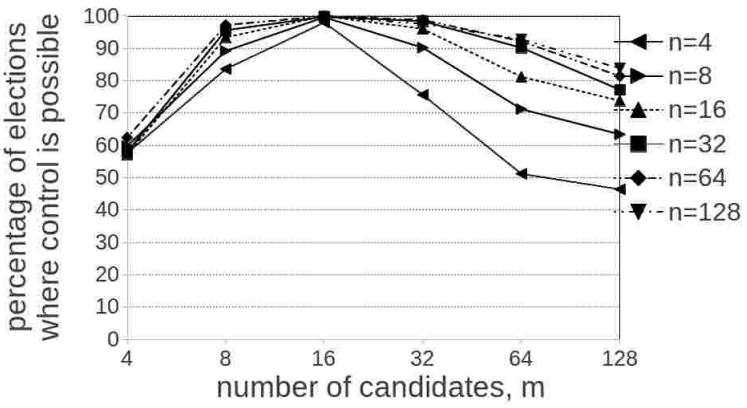


Figure 276: Results for Bucklin voting in the IC model for destructive control by runoff-partition of candidates in model TE. Number of voters is fixed.

	$n=4$						$n=8$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	288	418	490	378	256	232	299	446	498	451	356	317
# ci	212	82	4	1	0	0	201	54	0	0	0	0
# to	0	0	6	121	244	268	0	0	2	49	144	183
	$n=16$						$n=32$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	286	467	500	480	406	369	290	478	499	492	451	386
# ci	214	33	0	0	0	0	210	22	0	0	0	0
# to	0	0	0	20	94	131	0	0	1	8	49	114
	$n=64$						$n=128$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	312	486	500	494	461	407	288	478	499	488	464	419
# ci	188	14	0	0	0	0	212	22	0	0	0	0
# to	0	0	0	6	39	93	0	0	1	12	36	81

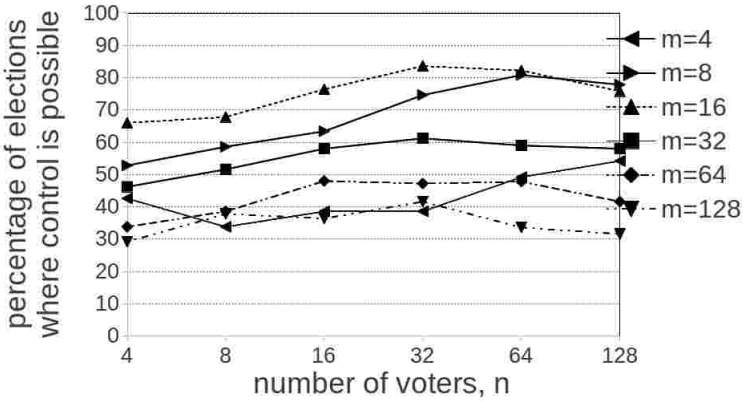


Figure 277: Results for Bucklin voting in the TM model for destructive control by runoff-partition of candidates in model TE. Number of candidates is fixed.

	$m=4$						$m=8$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	213	169	193	193	246	271	264	293	317	373	404	389
# ci	287	331	307	307	254	229	236	207	183	127	96	111
# to	0	0	0	0	0	0	0	0	0	0	0	0
	$m=16$						$m=32$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	330	339	382	418	411	379	231	258	290	306	295	290
# ci	165	152	105	61	43	37	146	129	78	46	18	14
# to	5	9	13	21	46	84	123	113	132	148	187	196
	$m=64$						$m=128$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	169	193	240	236	239	208	146	179	182	208	168	158
# ci	137	91	68	29	11	10	114	89	75	23	9	4
# to	194	216	192	250	250	282	240	232	243	269	323	338

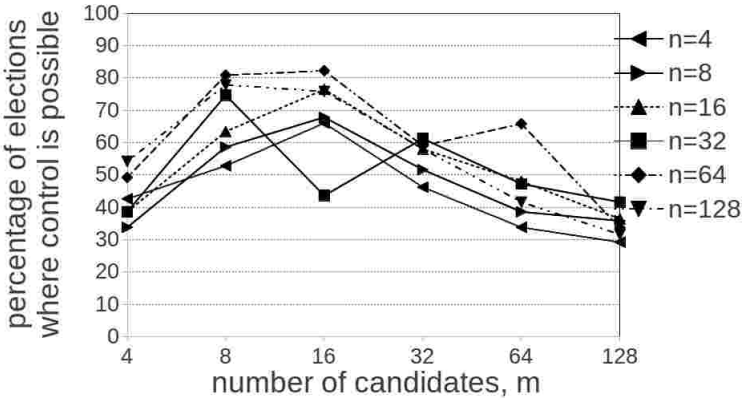


Figure 278: Results for Bucklin voting in the TM model for destructive control by runoff-partition of candidates in model TE. Number of voters is fixed.

	$n=4$						$n=8$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	213	264	330	231	169	146	169	293	339	258	193	179
# ci	287	236	165	146	137	114	331	207	152	129	91	89
# to	0	0	5	123	194	240	0	0	9	113	216	232
	$n=16$						$n=32$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	193	317	382	290	240	182	193	373	418	306	236	208
# ci	307	183	105	78	68	75	307	127	61	46	29	23
# to	0	0	13	132	192	243	0	0	21	148	235	269
	$n=64$						$n=128$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	246	404	411	295	239	168	271	389	379	290	208	158
# ci	254	96	43	18	11	9	229	111	37	14	10	4
# to	0	0	46	187	250	323	0	0	84	196	282	338

B.10.1. Computational Costs

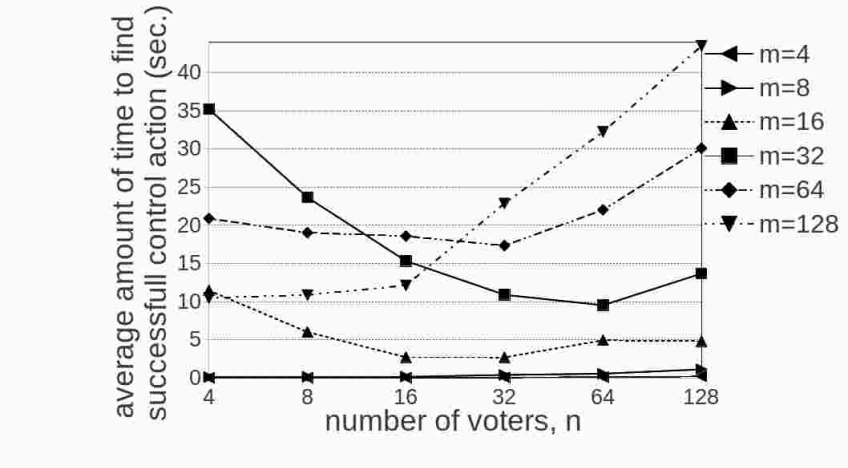


Figure 279: Average time the algorithm needs to find a successful control action for destructive control by runoff-partition of candidates in model TE in Bucklin elections in the IC model. The maximum is $43,52$ seconds.

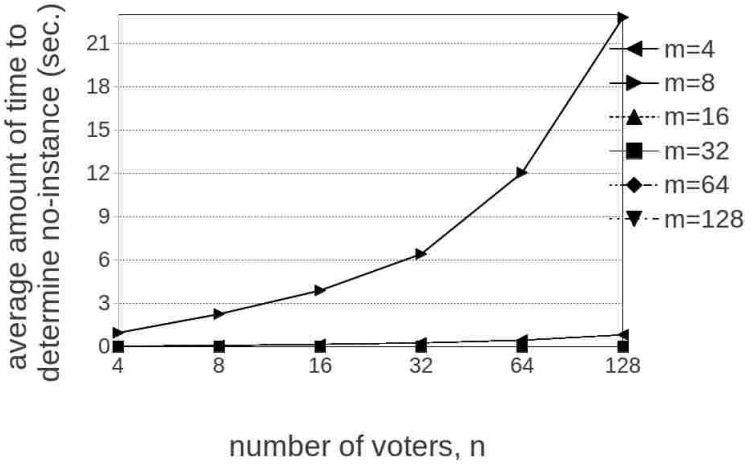


Figure 280: Average time the algorithm needs to determine no-instance of destructive control by runoff-partition of candidates in model TE in Bucklin elections in the IC model. The maximum is $22,78$ seconds.

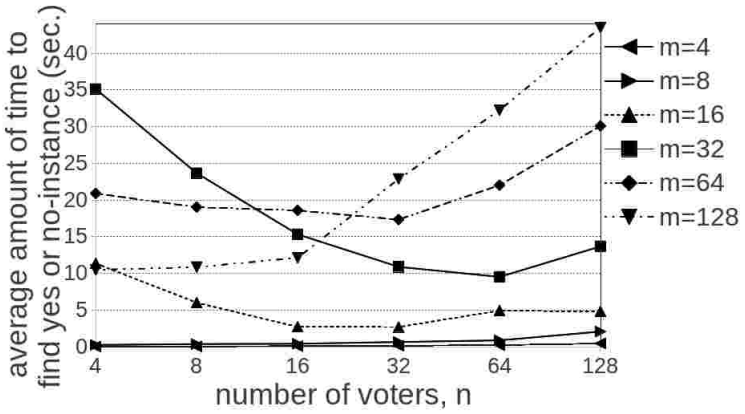


Figure 281: Average time the algorithm needs to give a definite output for destructive control by runoff-partition of candidates in model TE in Bucklin elections in the IC model. The maximum is $43,52$ seconds.

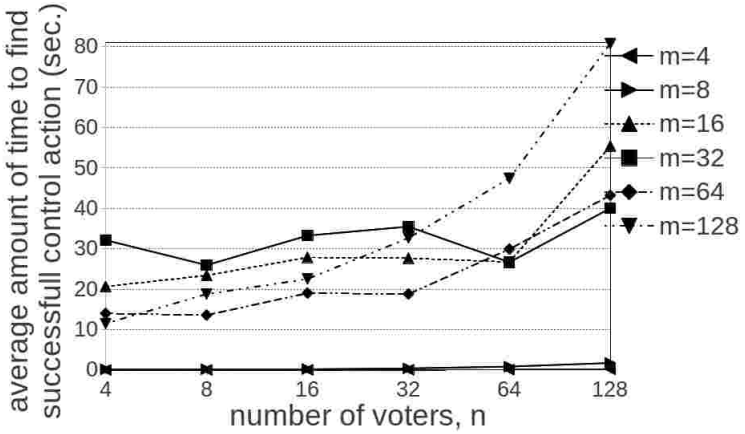


Figure 282: Average time the algorithm needs to find a successful control action for destructive control by runoff-partition of candidates in model TE in Bucklin elections in the TM model. The maximum is $80,81$ seconds.

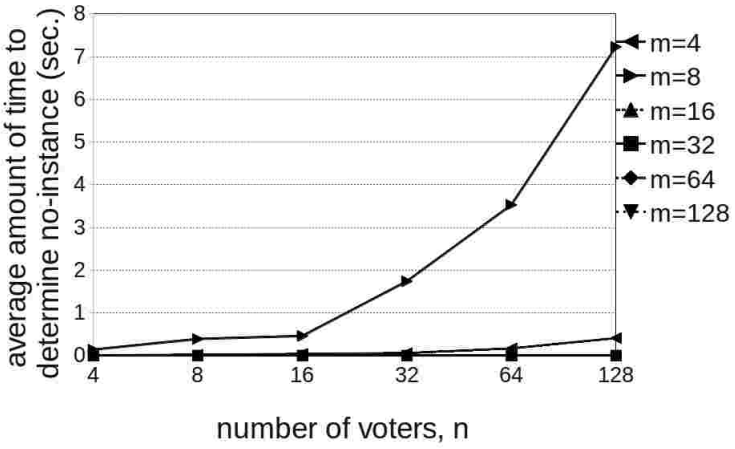


Figure 283: Average time the algorithm needs to determine no-instance of destructive control by runoff-partition of candidates in model TE in Bucklin elections in the TM model. The maximum is $7,23$ seconds.

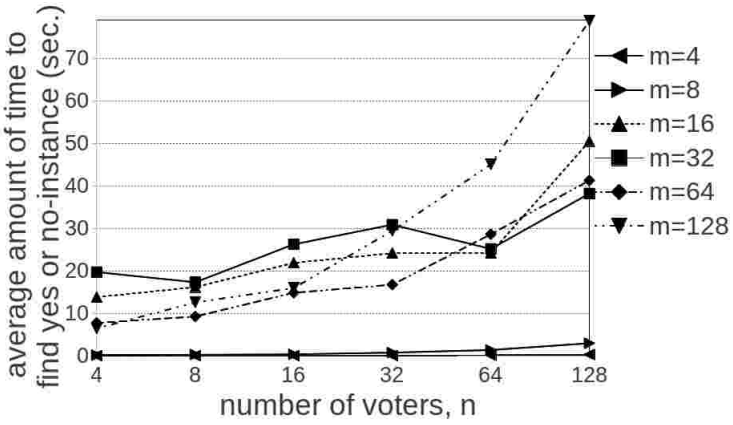


Figure 284: Average time the algorithm needs to give a definite output for destructive control by runoff-partition of candidates in model TE in Bucklin elections in the TM model. The maximum is $78,82$ seconds.

B.11. Constructive Control by Runoff Partition of Candidates in Model TP

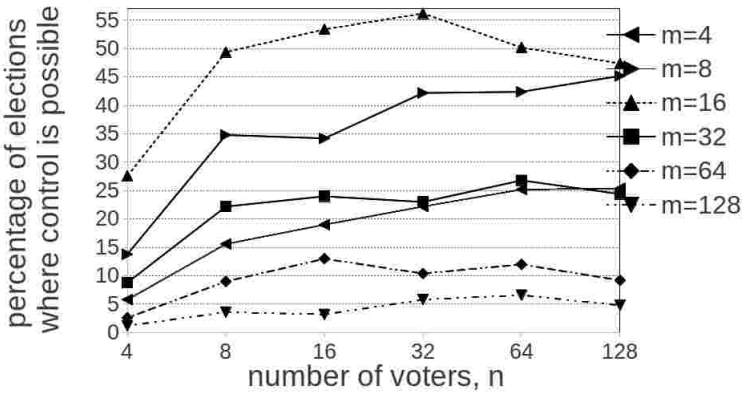


Figure 285: Results for Bucklin voting in the IC model for constructive control by runoff-partition of candidates in model TP. Number of candidates is fixed.

	$m=4$						$m=8$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	29	78	95	111	126	127	69	174	171	211	212	226
# ci	471	422	405	389	374	373	431	326	329	289	288	274
# to	0	0	0	0	0	0	0	0	0	0	0	0
	$m=16$						$m=32$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	138	247	267	281	251	237	44	111	120	115	134	122
# ci	0	0	0	0	0	0	0	0	0	0	0	0
# to	362	253	233	219	249	263	456	389	380	385	366	378
	$m=64$						$m=128$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	13	45	65	52	60	46	6	18	16	29	33	24
# ci	0	0	0	0	0	0	0	0	0	0	0	0
# to	487	455	435	448	440	454	494	482	484	471	467	476

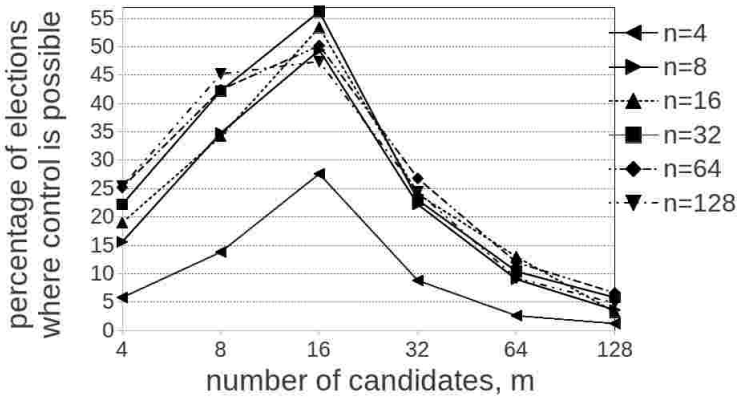


Figure 286: Results for Bucklin voting in the IC model for constructive control by runoff-partition of candidates in model TP. Number of voters is fixed.

	$n=4$						$n=8$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	29	69	138	44	13	6	78	174	247	111	45	18
# ci	471	431	0	0	0	0	422	326	0	0	0	0
# to	0	0	362	456	487	494	0	0	253	389	455	482
	$n=16$						$n=32$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	95	171	267	120	65	16	111	211	281	115	52	29
# ci	405	329	0	0	0	0	389	289	0	0	0	0
# to	0	0	233	380	435	484	0	0	219	385	448	471
	$n=64$						$n=128$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	126	212	251	134	60	33	127	226	237	122	46	24
# ci	374	288	0	0	0	0	373	274	0	0	0	0
# to	0	0	249	366	440	467	0	0	263	378	454	476

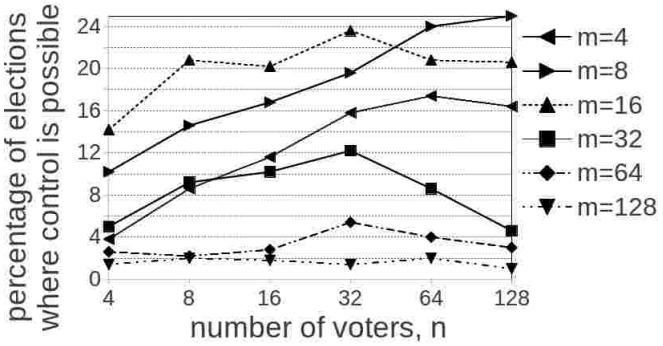


Figure 287: Results for Bucklin voting in the TM model for constructive control by runoff-partition of candidates in model TP. Number of candidates is fixed.

	$m=4$						$m=8$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	19	43	58	79	87	82	51	73	84	98	120	125
# ci	481	457	442	421	413	418	449	427	416	402	380	375
# to	0	0	0	0	0	0	0	0	0	0	0	0
	$m=16$						$m=32$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	71	104	101	118	104	103	25	46	51	61	43	23
# ci	0	0	0	0	0	0	0	0	0	0	0	0
# to	429	396	399	382	396	397	475	454	449	439	457	477
	$m=64$						$m=128$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	13	11	14	27	20	15	7	10	9	7	10	5
# ci	0	0	0	0	0	0	0	0	0	0	0	0
# to	487	489	486	473	480	485	493	490	491	493	490	495

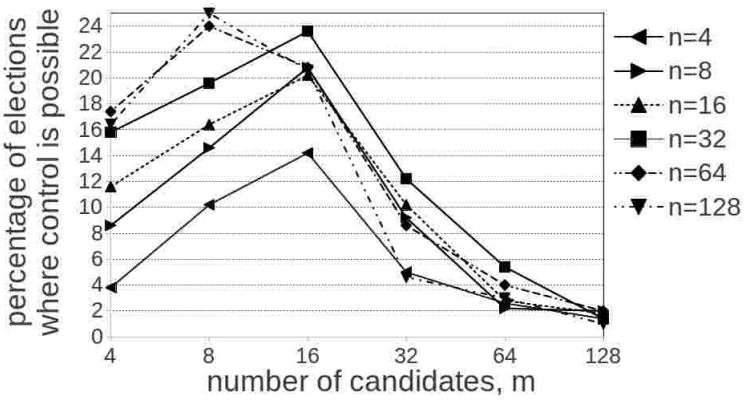


Figure 288: Results for Bucklin voting in the TM model for constructive control by runoff-partition of candidates in model TP. Number of voters is fixed.

	$n=4$						$n=8$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	19	51	71	25	13	7	43	73	104	46	11	10
# ci	481	449	0	0	0	0	457	427	0	0	0	0
# to	0	0	429	475	487	493	0	0	396	454	489	490
	$n=16$						$n=32$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	58	84	101	51	14	9	79	98	118	61	27	7
# ci	442	416	0	0	0	0	421	402	0	0	0	0
# to	0	0	399	449	486	491	0	0	382	439	473	493
	$n=64$						$n=128$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	87	120	104	43	20	10	82	125	103	23	15	5
# ci	413	380	0	0	0	0	418	375	0	0	0	0
# to	0	0	396	457	480	490	0	0	397	477	485	495

B.11.1. Computational Costs

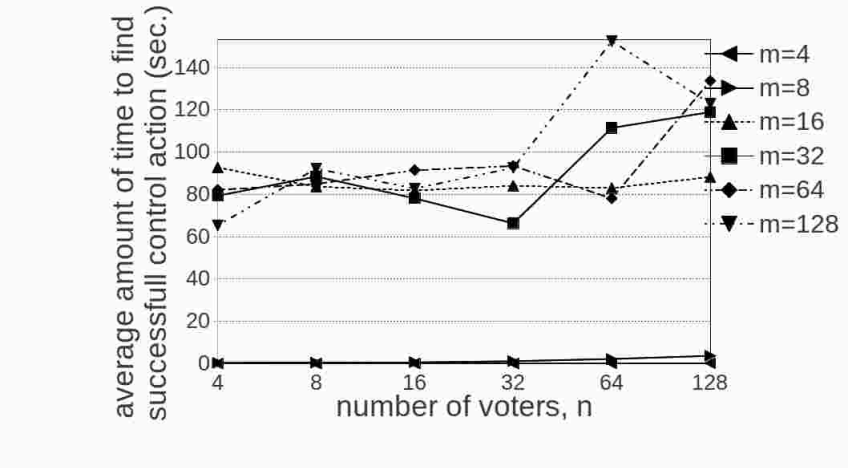


Figure 289: Average time the algorithm needs to find a successful control action for constructive control by runoff-partition of candidates in model TP in Bucklin elections in the IC model. The maximum is 152,45 seconds.

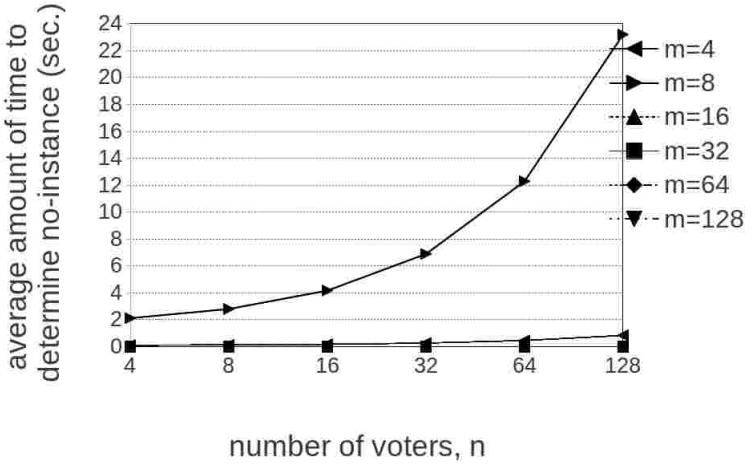


Figure 290: Average time the algorithm needs to determine no-instance of constructive control by runoff-partition of candidates in model TP in Bucklin elections in the IC model. The maximum is 23,19 seconds.

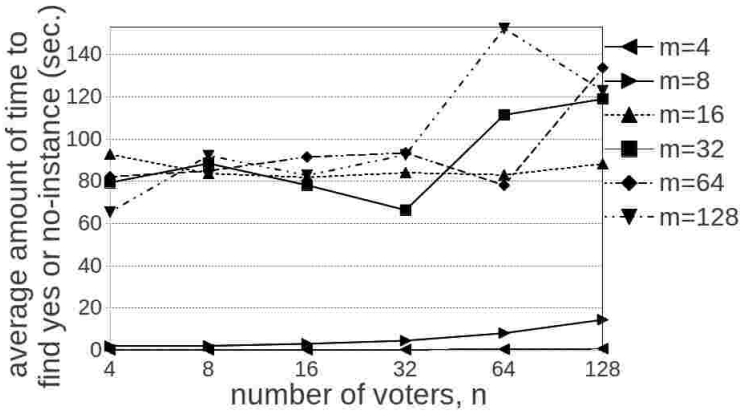


Figure 291: Average time the algorithm needs to give a definite output for constructive control by runoff-partition of candidates in model TP in Bucklin elections in the IC model. The maximum is 152,45 seconds.

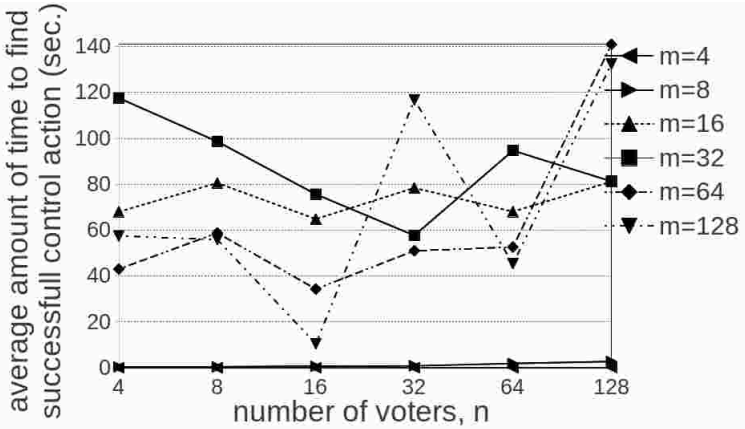


Figure 292: Average time the algorithm needs to find a successful control action for constructive control by runoff-partition of candidates in model TP in Bucklin elections in the TM model. The maximum is 140,93 seconds.

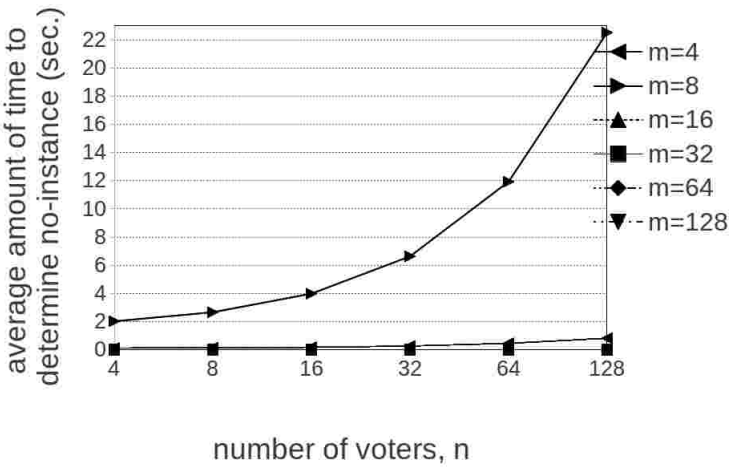


Figure 293: Average time the algorithm needs to determine no-instance of constructive control by runoff-partition of candidates in model TP in Bucklin elections in the TM model. The maximum is 22,53 seconds.

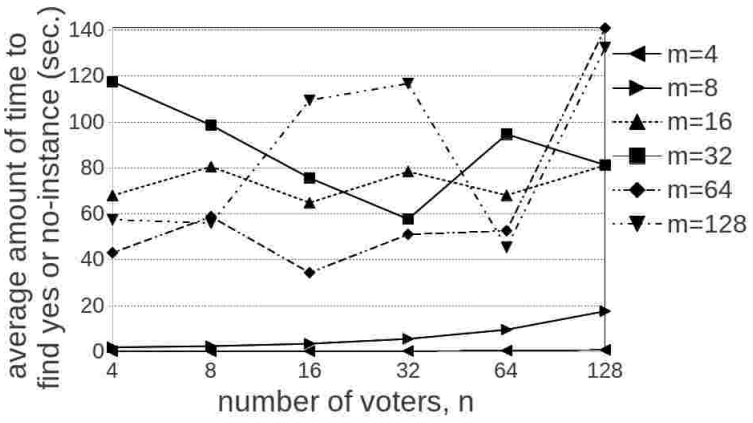


Figure 294: Average time the algorithm needs to give a definite output for constructive control by runoff-partition of candidates in model TP in Bucklin elections in the TM model. The maximum is 140,93 seconds.

B.12. Destructive Control by Runoff Partition of Candidates in Model TP

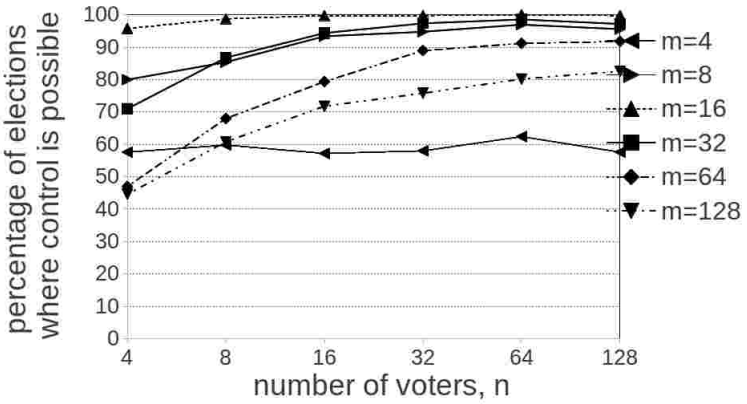


Figure 295: Results for Bucklin voting in the IC model for destructive control by runoff-partition of candidates in model TP. Number of candidates is fixed.

	$m=4$						$m=8$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	288	299	286	290	312	288	400	427	467	474	485	478
# ci	212	201	214	210	188	212	100	73	33	26	15	22
# to	0	0	0	0	0	0	0	0	0	0	0	0
	$m=16$						$m=32$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	479	494	499	499	500	499	355	434	472	487	493	486
# ci	4	0	0	0	0	0	1	0	0	0	0	0
# to	17	6	1	1	0	1	144	66	28	13	7	14
	$m=64$						$m=128$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	235	340	397	445	456	459	223	304	359	379	401	413
# ci	0	0	0	0	0	0	0	0	0	0	0	0
# to	265	160	103	55	44	41	277	196	141	121	99	87

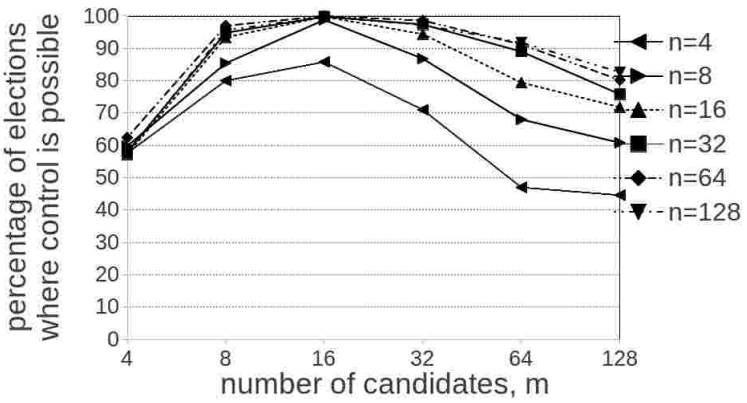


Figure 296: Results for Bucklin voting in the IC model for destructive control by runoff-partition of candidates in model TP. Number of voters is fixed.

	$n=4$						$n=8$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	288	400	479	355	235	223	299	427	494	434	340	304
# ci	212	10	4	1	0	0	201	73	0	0	0	0
# to	0	0	17	144	265	277	0	0	6	66	160	196
	$n=16$						$n=32$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	286	467	499	472	397	359	290	474	499	487	445	379
# ci	214	33	0	0	0	0	210	26	0	0	0	0
# to	0	0	1	28	103	141	0	0	1	13	55	121
	$n=64$						$n=128$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	312	485	500	493	456	401	288	478	499	486	459	413
# ci	188	15	0	0	0	0	212	22	0	0	0	0
# to	0	0	0	7	44	99	0	0	1	14	41	87

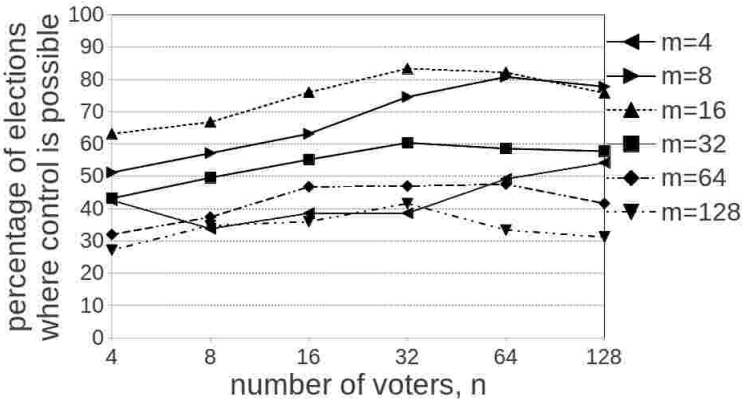


Figure 297: Results for Bucklin voting in the TM model for destructive control by runoff-partition of candidates in model TP. Number of candidates is fixed.

	$m=4$						$m=8$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	213	169	193	193	246	271	256	286	316	373	404	389
# ci	287	331	307	307	254	229	244	214	184	127	96	111
# to	0	0	0	0	0	0	0	0	0	0	0	0
	$m=16$						$m=32$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	316	334	380	417	411	379	216	248	276	302	293	289
# ci	165	152	105	61	43	37	146	129	78	46	18	14
# to	19	14	15	22	46	84	138	123	146	152	189	197
	$m=64$						$m=128$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	160	187	234	235	238	208	136	174	180	208	167	156
# ci	137	91	68	29	11	10	114	89	75	23	9	4
# to	203	222	198	236	251	282	250	237	245	269	324	340

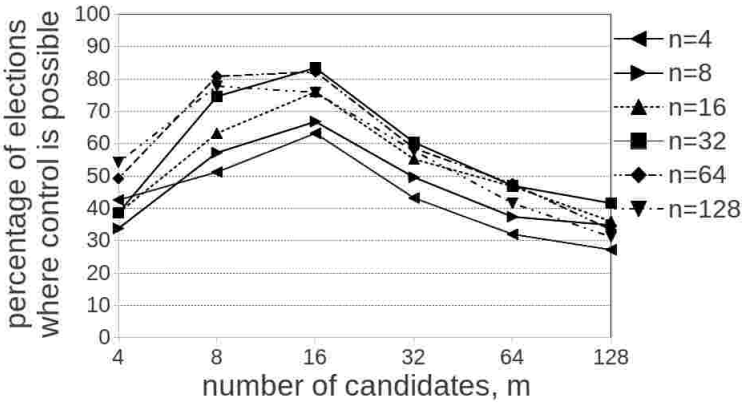


Figure 298: Results for Bucklin voting in the TM model for destructive control by runoff-partition of candidates in model TP. Number of voters is fixed.

	$n=4$						$n=8$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	213	256	316	216	160	136	169	286	334	248	187	174
# ci	287	244	165	146	137	114	331	214	152	129	91	89
# to	0	0	19	138	203	250	0	0	14	123	222	237
	$n=16$						$n=32$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	193	316	380	276	234	180	193	373	417	302	235	208
# ci	307	184	105	78	68	75	307	127	61	46	29	23
# to	0	0	15	146	198	245	0	0	22	152	236	269
	$n=64$						$n=128$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	246	404	411	293	238	167	271	389	379	289	208	156
# ci	254	96	43	18	11	9	229	111	37	14	10	4
# to	0	0	46	189	251	324	0	0	84	197	282	340

B.12.1. Computational Costs

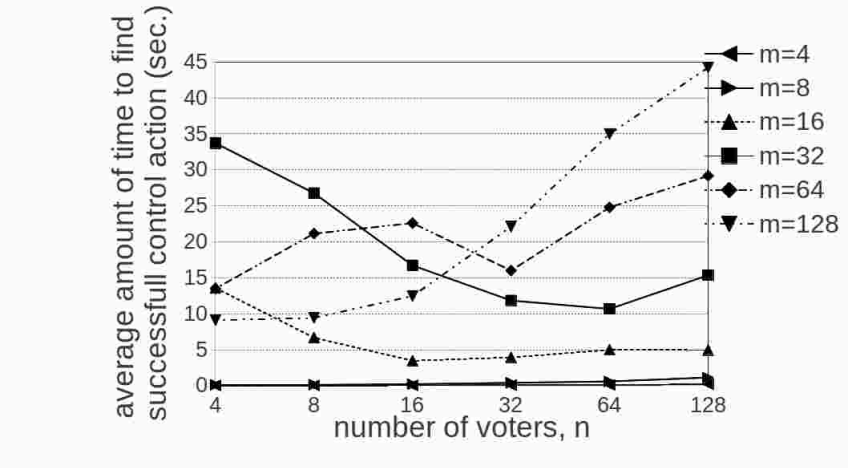


Figure 299: Average time the algorithm needs to find a successful control action for destructive control by runoff-partition of candidates in model TP in Bucklin elections in the IC model. The maximum is 44,23 seconds.

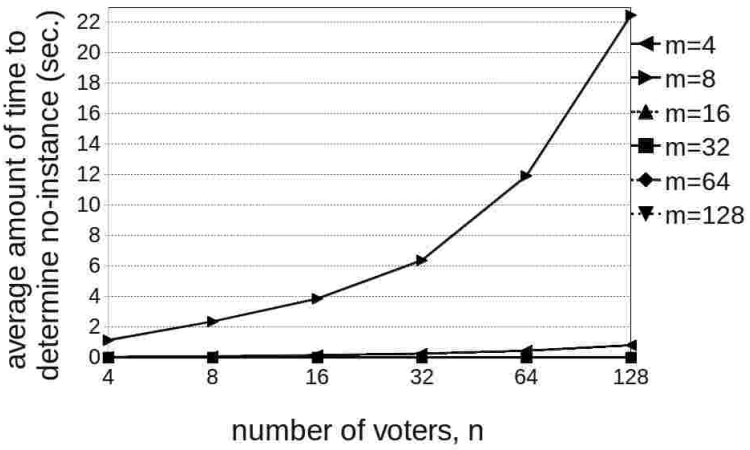


Figure 300: Average time the algorithm needs to determine no-instance of destructive control by runoff-partition of candidates in model TP in Bucklin elections in the IC model. The maximum is 22,47 seconds.

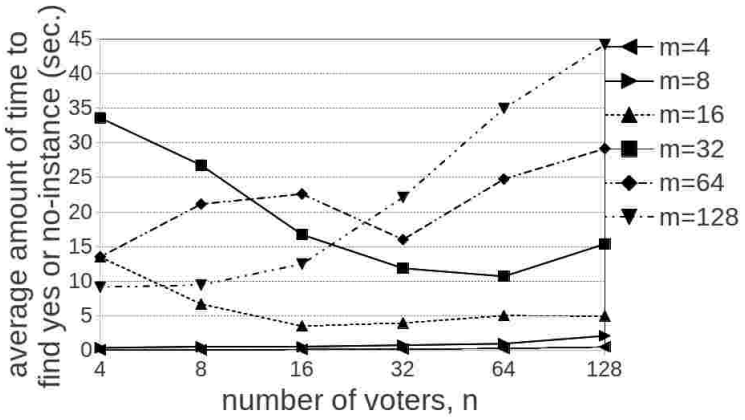


Figure 301: Average time the algorithm needs to give a definite output for destructive control by runoff-partition of candidates in model TP in Bucklin elections in the IC model. The maximum is $44,23$ seconds.

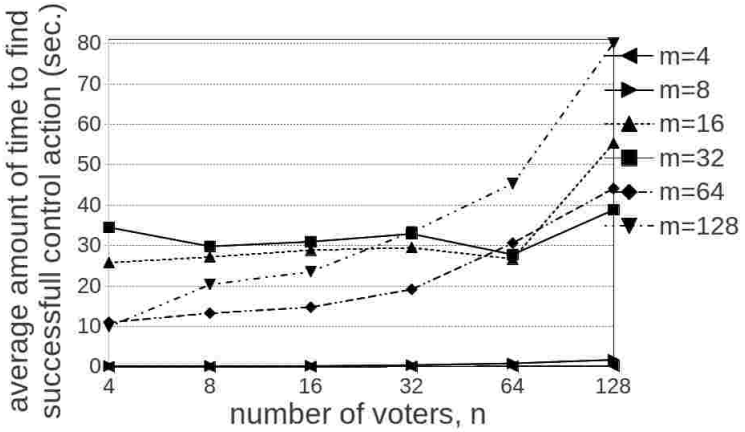


Figure 302: Average time the algorithm needs to find a successful control action for destructive control by runoff-partition of candidates in model TP in Bucklin elections in the TM model. The maximum is $80,1$ seconds.

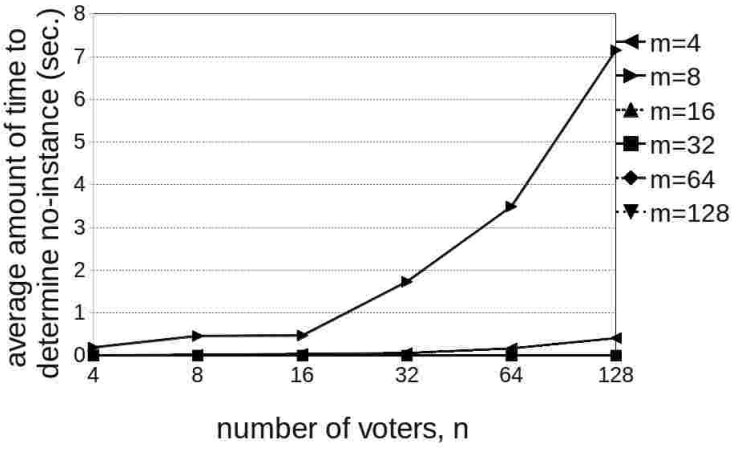


Figure 303: Average time the algorithm needs to determine no-instance of destructive control by runoff-partition of candidates in model TP in Bucklin elections in the TM model. The maximum is $7,15$ seconds.

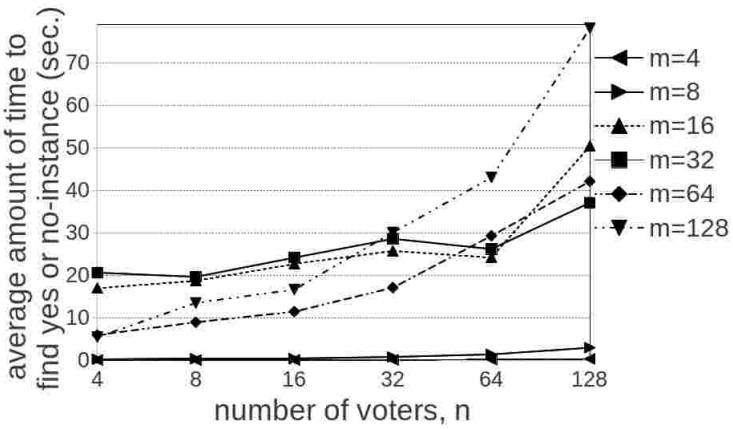


Figure 304: Average time the algorithm needs to give a definite output for destructive control by runoff-partition of candidates in model TP in Bucklin elections in the TM model. The maximum is $78,09$ seconds.

B.13. Constructive Control by Adding Voters

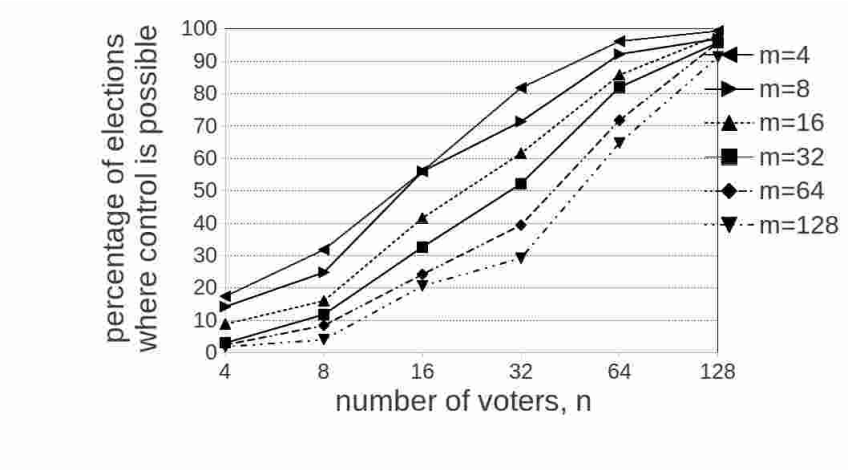


Figure 305: Results for Bucklin voting in the IC model for constructive control by adding voters. Number of candidates is fixed.

	$m=4$						$m=8$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	87	159	280	409	481	497	71	124	280	357	461	485
# ci	413	341	220	7	0	0	429	376	220	6	0	0
# to	0	0	0	84	19	3	0	0	0	137	39	15
	$m=16$						$m=32$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	44	80	208	308	429	490	15	59	163	261	410	479
# ci	456	420	292	21	0	0	485	441	337	35	0	0
# to	0	0	0	171	71	10	0	0	0	204	90	21
	$m=64$						$m=128$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	12	42	121	197	359	479	9	20	103	146	324	457
# ci	488	458	377	72	1	0	491	480	232	94	2	0
# to	0	0	2	231	140	21	0	0	165	260	174	43

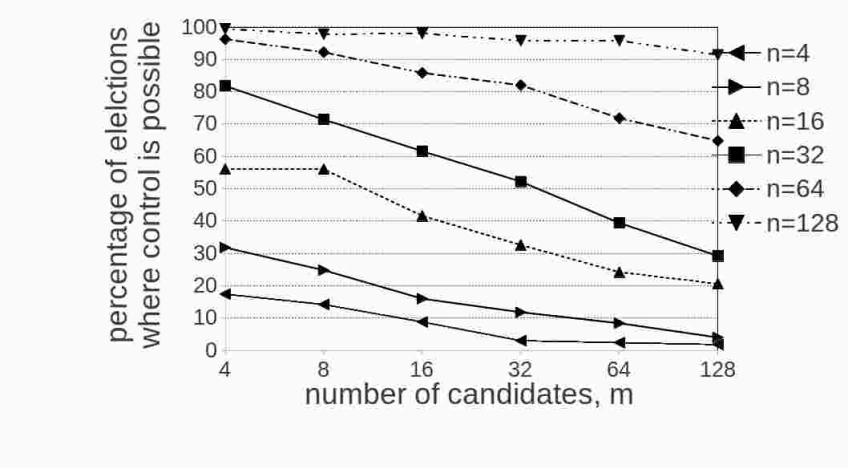


Figure 306: Results for Bucklin voting in the IC model for constructive control by adding voters. Number of voters is fixed.

	$n=4$						$n=8$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	87	71	44	15	12	9	159	124	80	59	42	20
# ci	413	429	456	485	488	491	341	376	420	441	458	480
# to	0	0	0	0	0	0	0	0	0	0	0	0
	$n=16$						$n=32$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	280	280	208	163	121	103	409	357	308	261	197	146
# ci	220	220	292	337	377	232	7	6	21	35	72	94
# to	0	0	0	0	2	165	84	137	171	204	231	260
	$n=64$						$n=128$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	481	461	429	410	359	324	497	489	490	479	479	457
# ci	0	0	0	0	1	2	0	0	0	0	0	0
# to	19	39	71	90	140	174	3	11	10	21	21	43

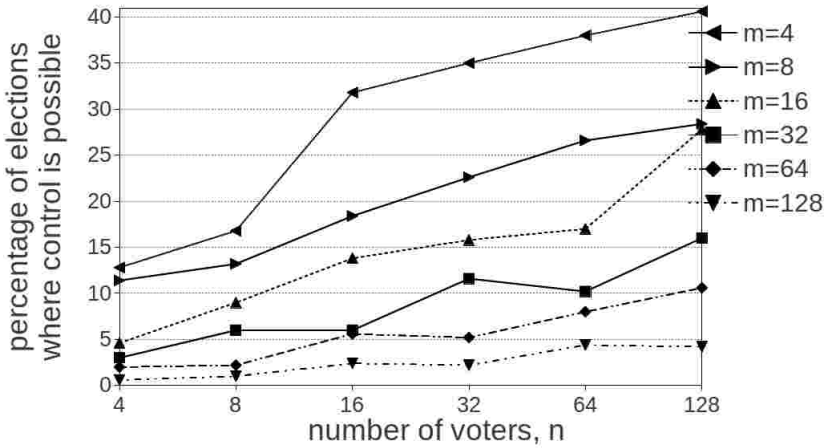


Figure 307: Results for Bucklin voting in the TM model for constructive control by adding voters. Number of candidates is fixed.

	$m=4$						$m=8$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	64	84	159	175	190	203	57	66	92	113	133	142
# ci	436	416	341	203	231	229	443	434	408	302	296	298
# to	0	0	0	122	79	68	0	0	0	85	71	60
	$m=16$						$m=32$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	23	45	69	79	85	139	15	30	30	58	51	80
# ci	477	455	431	357	352	314	485	470	470	390	391	376
# to	0	0	0	64	63	47	0	0	0	52	58	44
	$m=64$						$m=128$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	10	11	28	26	40	53	3	5	12	11	22	21
# ci	490	489	472	422	403	406	497	495	442	438	442	442
# to	0	0	0	52	57	41	0	0	46	51	36	37

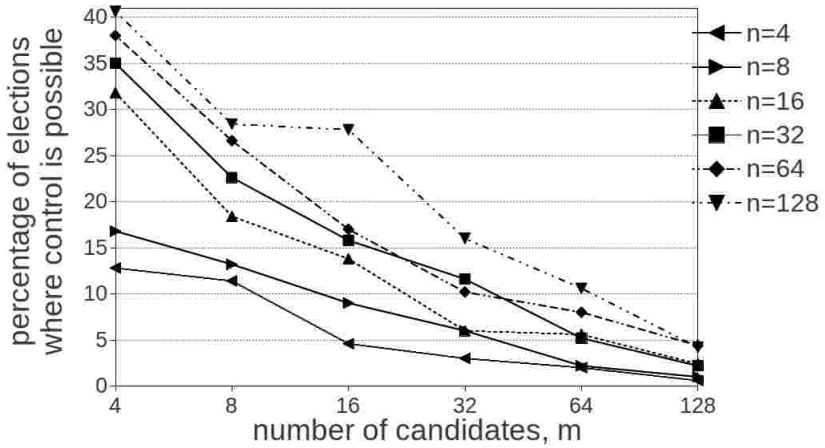


Figure 308: Results for Bucklin voting in the TM model for constructive control by adding voters. Number of voters is fixed.

	$n=4$						$n=8$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	64	57	23	15	10	3	84	66	45	30	11	5
# ci	436	443	477	485	490	497	416	434	455	470	489	495
# to	0	0	0	0	0	0	0	0	0	0	0	0
	$n=16$						$n=32$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	159	92	69	30	28	12	175	113	79	58	26	11
# ci	341	408	431	470	472	442	203	302	357	390	422	438
# to	0	0	0	0	0	46	122	85	64	52	52	51
	$n=64$						$n=128$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	190	133	85	51	40	22	203	142	139	80	53	21
# ci	231	296	352	391	403	442	229	298	314	376	406	442
# to	79	71	63	58	57	36	68	60	47	44	41	37

B.13.1. Computational Costs

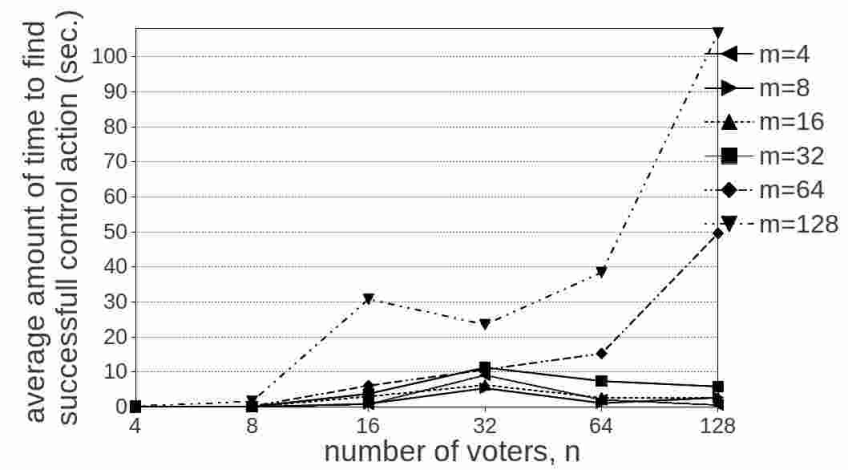


Figure 309: Average time the algorithm needs to find a successful control action for constructive control by adding voters in Bucklin elections in the IC model. The maximum is 106,7 seconds.

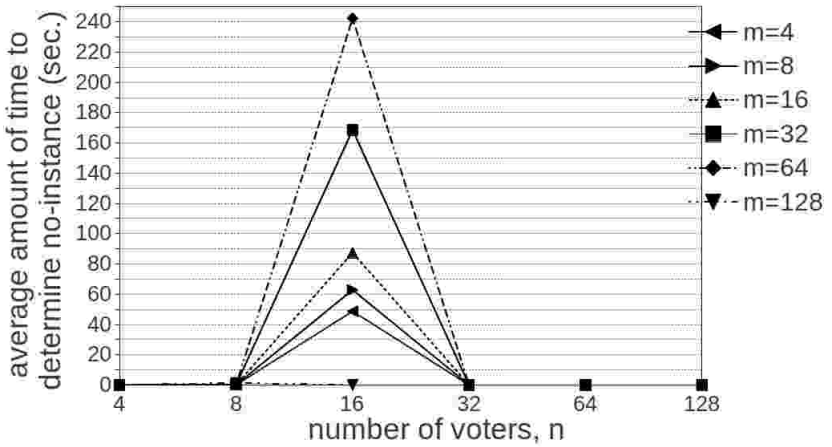


Figure 310: Average time the algorithm needs to determine no-instance of constructive control by adding voters in Bucklin elections in the IC model. The maximum is 242,32 seconds.

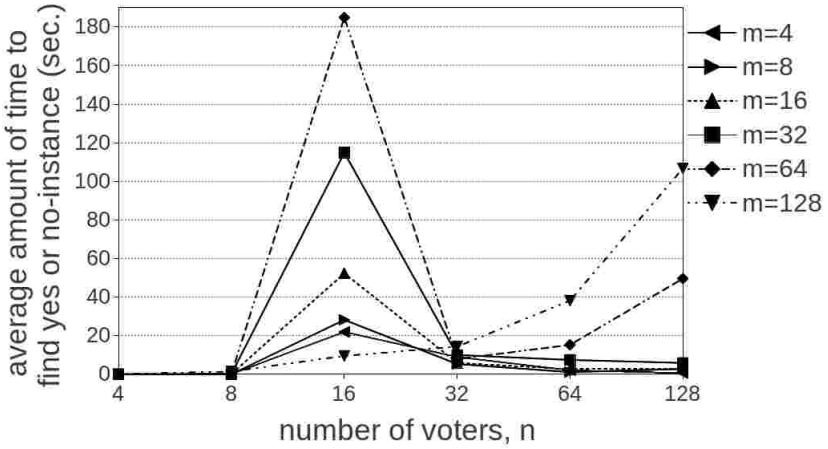


Figure 311: Average time the algorithm needs to give a definite output for constructive control by adding voters in Bucklin elections in the IC model. The maximum is 184,92 seconds.

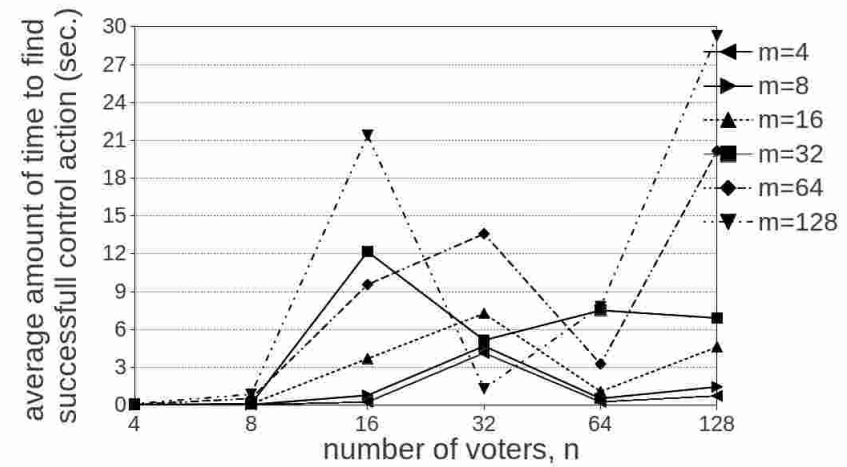


Figure 312: Average time the algorithm needs to find a successful control action for constructive control by adding voters in Bucklin elections in the TM model. The maximum is 29,3 seconds.

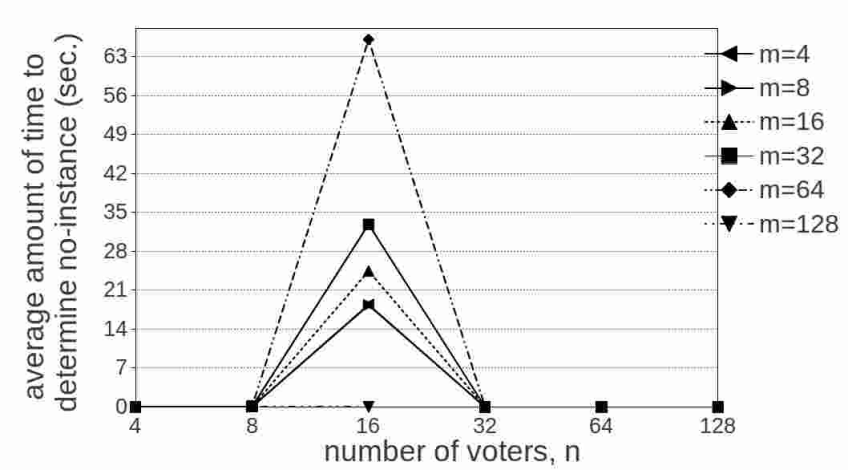


Figure 313: Average time the algorithm needs to determine no-instance of constructive control by adding voters in Bucklin elections in the TM model. The maximum is 66,06 seconds.

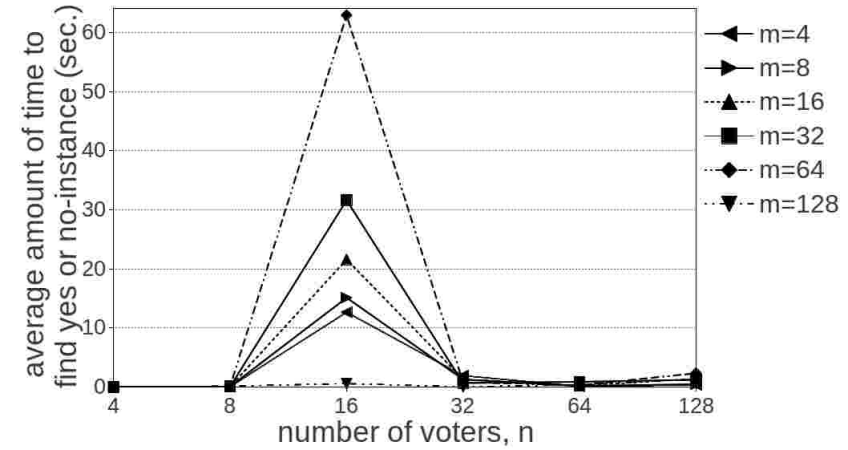


Figure 314: Average time the algorithm needs to give a definite output for constructive control by adding voters in Bucklin elections in the TM model. The maximum is 62,9 seconds.

B.14. Constructive Control by Deleting Voters

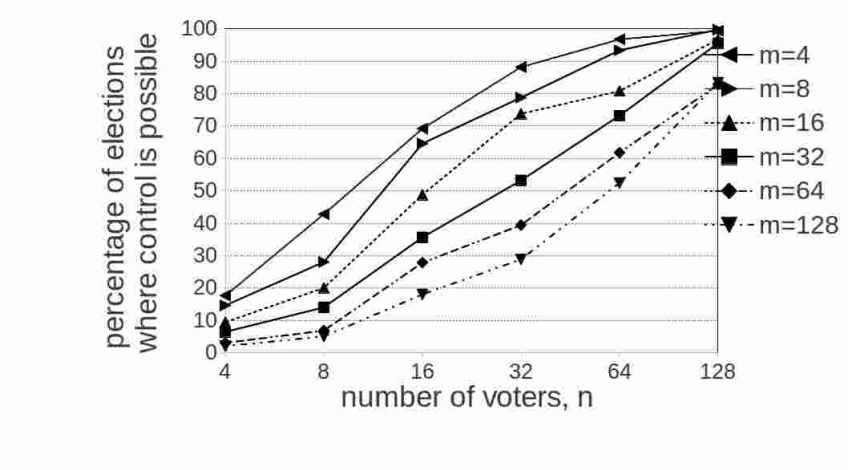


Figure 315: Results for Bucklin voting in the IC model for constructive control by deleting voters. Number of candidates is fixed.

	$m=4$						$m=8$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	88	214	346	441	484	497	73	140	323	394	467	499
# ci	412	286	154	10	0	0	427	360	177	7	0	0
# to	0	0	0	49	16	3	0	0	0	99	33	1
	$m=16$						$m=32$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	47	100	244	369	404	484	32	70	178	266	366	478
# ci	453	400	256	14	0	0	468	430	322	40	0	0
# to	0	0	0	117	96	16	0	0	0	194	134	22
	$m=64$						$m=128$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	15	34	139	197	309	414	10	25	90	144	262	417
# ci	485	466	357	58	2	0	490	475	253	93	2	0
# to	0	0	4	245	189	86	0	0	157	263	236	83

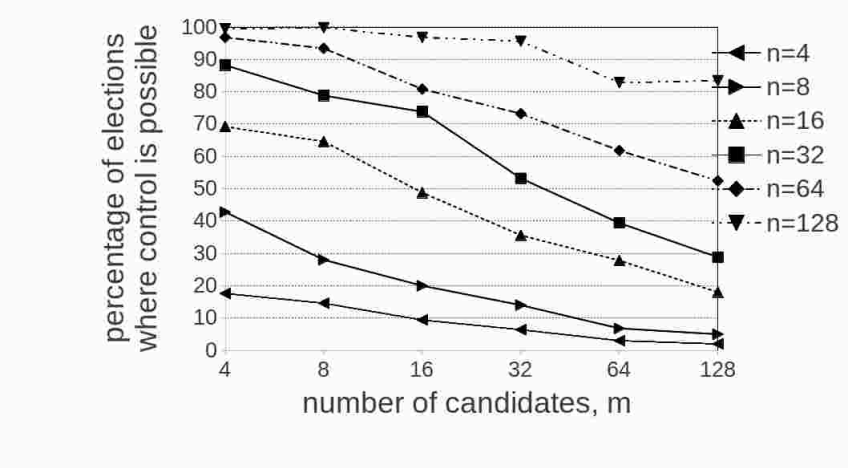


Figure 316: Results for Bucklin voting in the IC model for constructive control by deleting voters. Number of voters is fixed.

	$n=4$						$n=8$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	88	73	47	32	15	10	214	140	100	70	34	25
# ci	412	427	453	468	485	490	286	360	400	430	466	475
# to	0	0	0	0	0	0	0	0	0	0	0	0
	$n=16$						$n=32$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	346	323	244	178	139	90	441	394	369	266	197	144
# ci	154	177	256	322	357	253	10	7	14	40	58	93
# to	0	0	0	0	4	157	49	99	117	194	245	263
	$n=64$						$n=128$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	484	467	404	366	309	262	497	499	484	478	414	417
# ci	0	0	0	0	2	2	0	0	0	0	0	0
# to	16	33	96	134	189	236	3	1	16	22	86	83

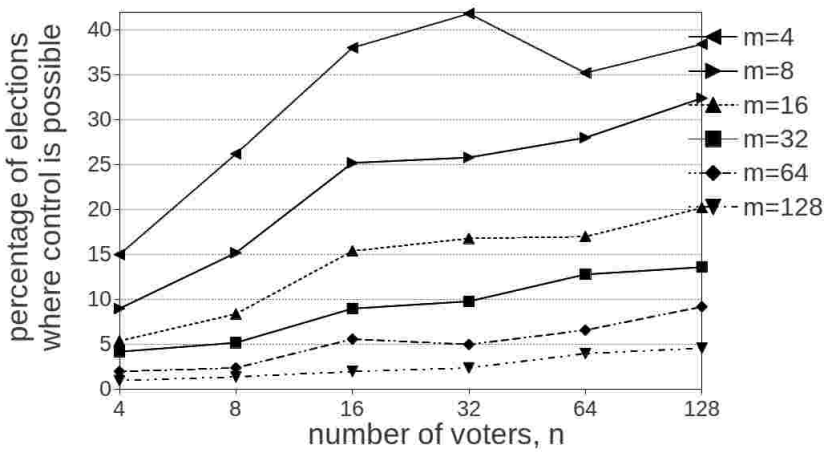


Figure 317: Results for Bucklin voting in the TM model for constructive control by deleting voters. Number of candidates is fixed.

	$m=4$						$m=8$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	75	131	190	209	176	192	45	76	126	129	140	162
# ci	425	369	310	216	222	227	455	424	374	298	283	275
# to	0	0	0	75	102	81	0	0	0	73	77	63
	$m=16$						$m=32$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	27	42	77	84	85	101	21	26	45	49	64	68
# ci	473	458	423	351	342	330	479	474	394	403	386	368
# to	0	0	0	65	73	66	0	0	61	48	5	64
	$m=64$						$m=128$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	10	12	28	25	33	46	5	7	10	12	20	23
# ci	490	488	427	430	410	408	495	493	443	445	439	443
# to	0	0	45	45	57	46	0	0	47	43	41	34

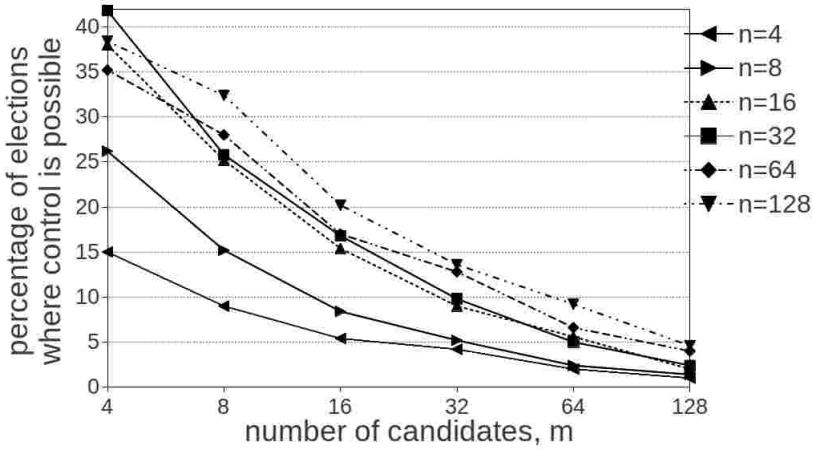


Figure 318: Results for Bucklin voting in the TM model for constructive control by deleting voters. Number of voters is fixed.

	$n=4$						$n=8$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	75	45	27	21	10	5	131	76	42	26	12	7
# ci	425	455	473	479	490	495	369	424	458	474	488	493
# to	0	0	0	0	0	0	0	0	0	0	0	0
	$n=16$						$n=32$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	190	126	77	45	28	10	209	129	84	49	25	12
# ci	310	374	423	394	427	443	216	298	351	403	430	445
# to	0	0	0	61	45	47	75	73	65	48	45	43
	$n=64$						$n=128$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	176	140	85	64	33	20	192	162	101	68	46	23
# ci	222	283	342	386	410	439	227	275	333	368	408	443
# to	102	77	73	50	57	41	81	63	66	64	46	34

B.14.1. Computational Costs

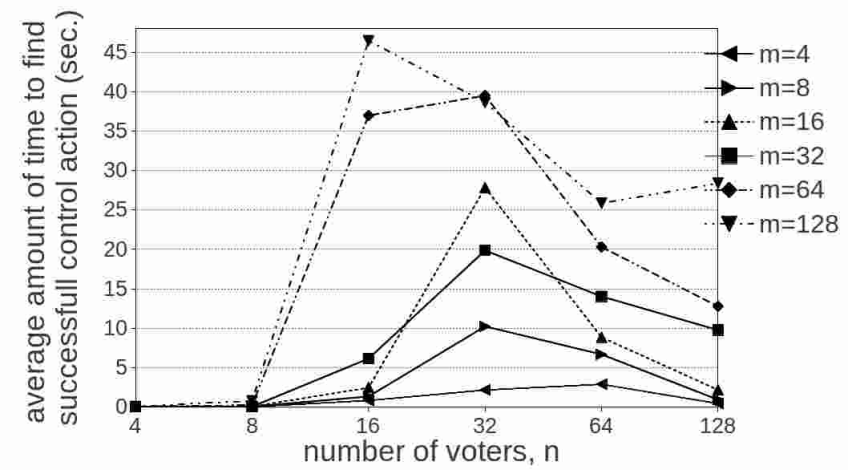


Figure 319: Average time the algorithm needs to find a successful control action for constructive control by deleting voters in Bucklin elections in the IC model. The maximum is $46,5$ seconds.

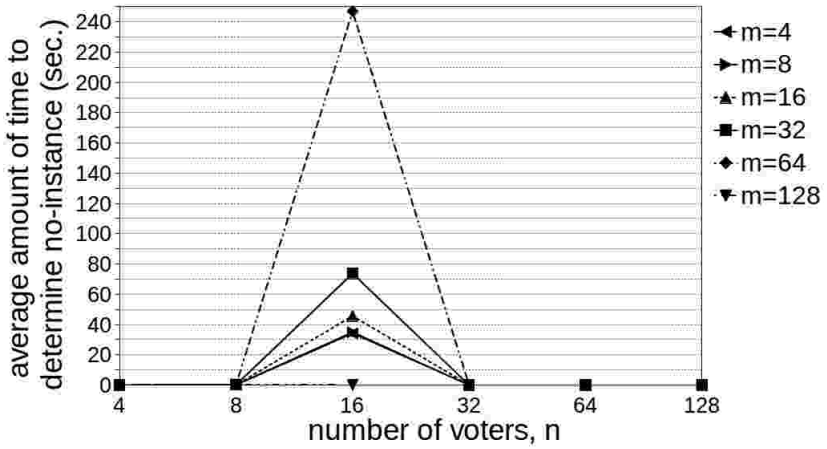


Figure 320: Average time the algorithm needs to determine no-instance of constructive control by deleting voters in Bucklin elections in the IC model. The maximum is $247,02$ seconds.

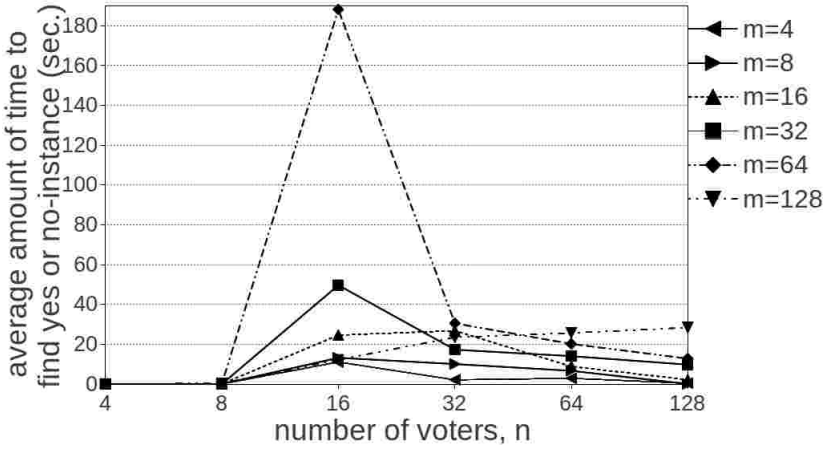


Figure 321: Average time the algorithm needs to give a definite output for constructive control by deleting voters in Bucklin elections in the IC model. The maximum is 188, 16 seconds.

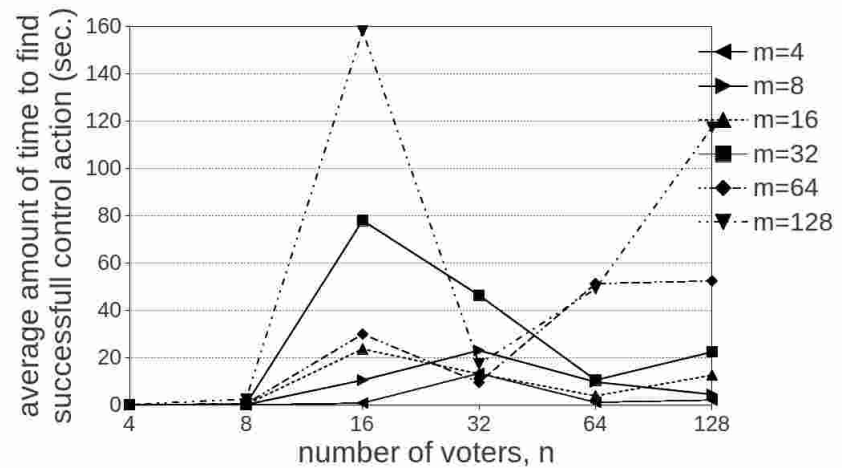


Figure 322: Average time the algorithm needs to find a successful control action for constructive control by deleting voters in Bucklin elections in the TM model. The maximum is 158, 2 seconds.

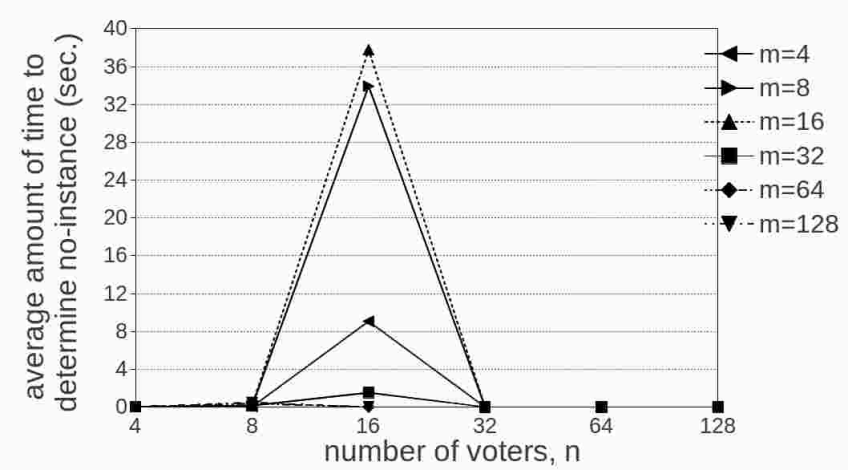


Figure 323: Average time the algorithm needs to determine no-instance of constructive control by deleting voters in Bucklin elections in the TM model. The maximum is $37,76$ seconds.

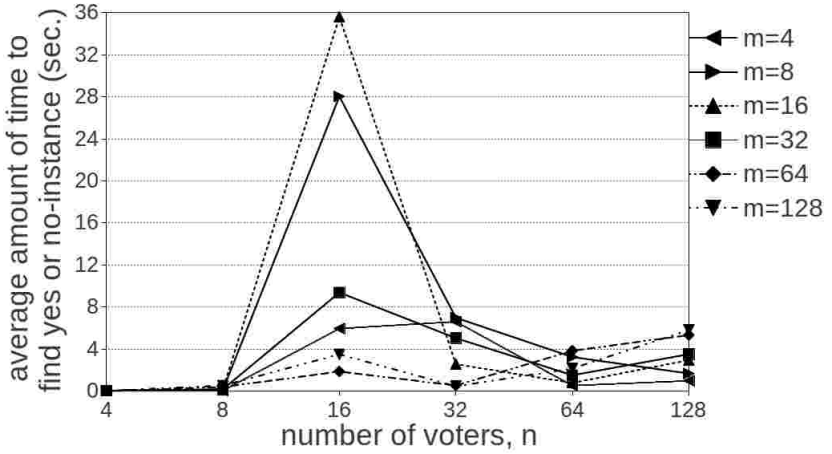


Figure 324: Average time the algorithm needs to give a definite output for constructive control by deleting voters in Bucklin elections in the TM model. The maximum is $35,6$ seconds.

B.15. Constructive Control by Partition of Voters in Model TE

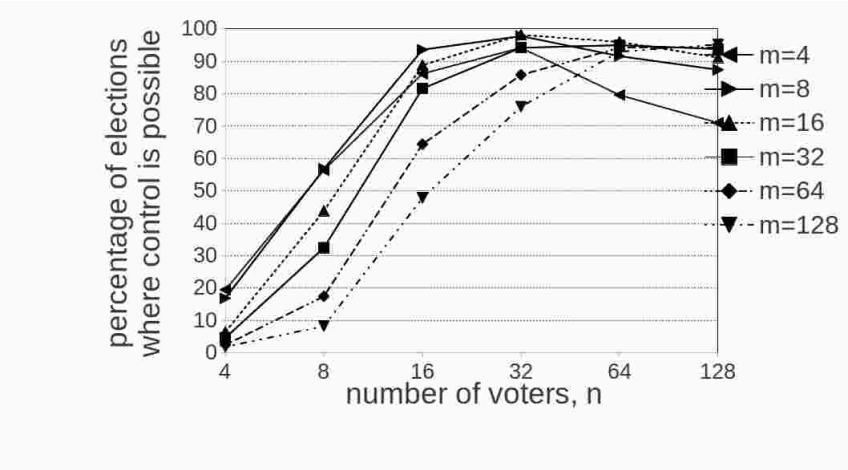


Figure 325: Results for Bucklin voting in the IC model for constructive control by partition of voters in model TE. Number of candidates is fixed.

	$m=4$						$m=8$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	97	282	431	471	398	355	84	284	468	489	458	437
# ci	403	218	69	0	0	0	416	216	32	0	0	0
# to	0	0	0	29	102	145	0	0	0	11	42	63
	$m=16$						$m=32$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	32	219	444	491	480	456	23	162	408	471	475	469
# ci	468	281	0	0	0	0	477	338	0	0	0	0
# to	0	0	56	9	20	44	0	0	92	29	25	31
	$m=64$						$m=128$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	12	87	322	429	471	471	9	41	239	380	465	476
# ci	488	413	0	0	0	0	491	459	0	0	0	0
# to	0	0	178	71	29	29	0	0	261	120	35	24

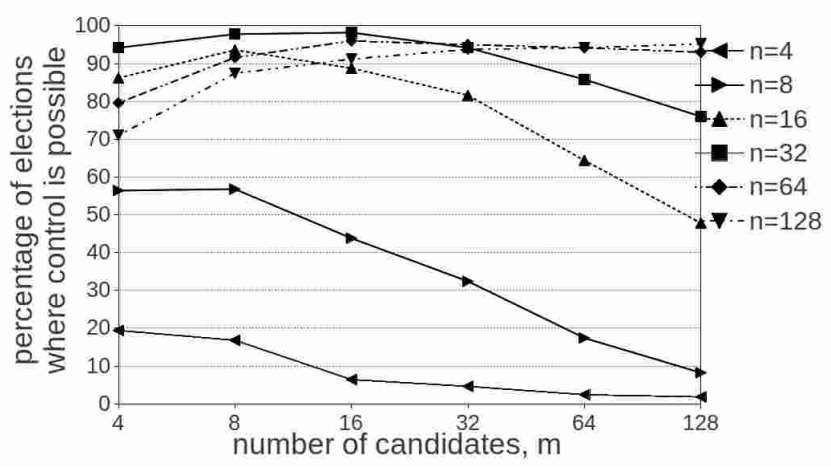


Figure 326: Results for Bucklin voting in the IC model for constructive control by partition of voters in model TE. Number of voters is fixed.

	$n=4$						$n=8$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	97	84	32	23	12	9	282	284	219	162	87	41
# ci	403	416	468	477	488	491	218	216	281	338	413	459
# to	0	0	0	0	0	0	0	0	0	0	0	0
	$n=16$						$n=32$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	431	468	444	408	322	239	471	489	491	471	429	380
# ci	69	32	0	0	0	0	0	0	0	0	0	0
# to	0	0	56	92	178	261	29	11	9	29	71	120
	$n=64$						$n=128$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	398	458	480	475	471	465	355	437	456	469	471	476
# ci	0	0	0	0	0	0	0	0	0	0	0	0
# to	102	42	20	25	29	35	145	63	44	31	29	24

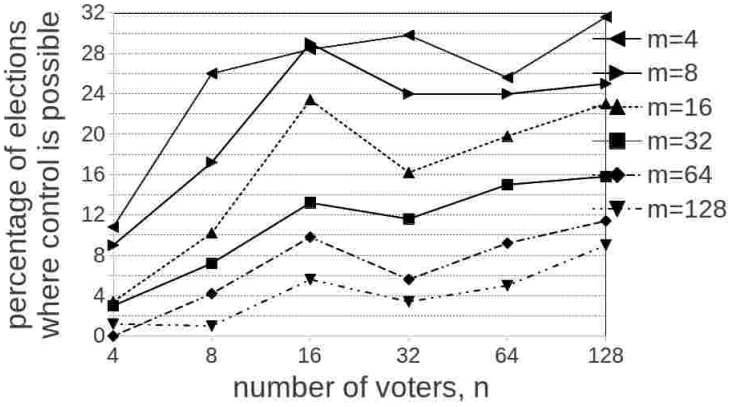


Figure 327: Results for Bucklin voting in the TM model for constructive control by partition of voters in model TE. Number of candidates is fixed.

	$m=4$						$m=8$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	54	130	142	149	128	158	45	86	145	120	120	125
# ci	446	370	358	189	159	115	455	414	355	106	84	67
# to	0	0	0	162	213	227	0	0	0	274	296	308
	$m=16$						$m=32$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	17	51	117	81	99	115	15	36	66	58	75	79
# ci	483	449	97	54	26	34	485	464	63	35	14	18
# to	0	0	286	365	375	351	0	0	371	407	411	403
	$m=64$						$m=128$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	0	21	49	28	46	57	6	5	28	17	25	45
# ci	500	479	60	28	5	8	494	495	40	20	6	0
# to	0	0	392	444	449	435	0	0	432	463	469	455

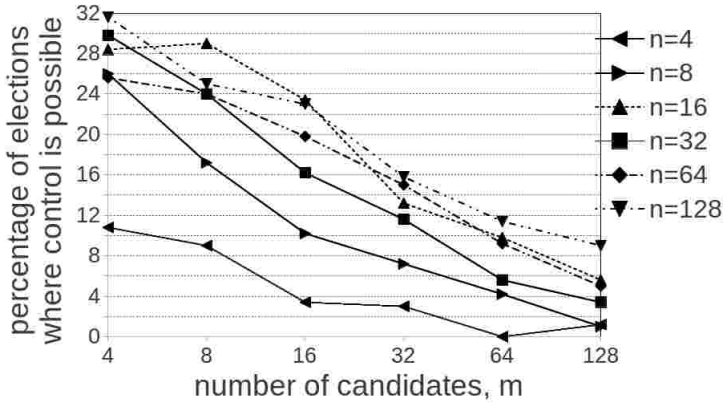


Figure 328: Results for Bucklin voting in the TM model for constructive control by partition of voters in model TE. Number of voters is fixed.

	$n=4$						$n=8$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	54	45	17	15	0	6	130	86	51	36	21	5
# ci	446	455	483	485	500	494	370	414	449	464	479	495
# to	0	0	0	0	0	0	0	0	0	0	0	0
	$n=16$						$n=32$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	142	145	117	66	49	28	149	120	81	58	28	17
# ci	358	355	97	63	60	40	189	106	54	35	28	20
# to	0	0	286	371	392	432	162	274	365	407	444	463
	$n=64$						$n=128$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	128	120	99	75	46	25	158	125	115	79	57	45
# ci	159	84	26	14	5	6	115	67	34	18	8	0
# to	213	296	375	411	449	469	227	308	351	403	435	455

B.15.1. Computational Costs

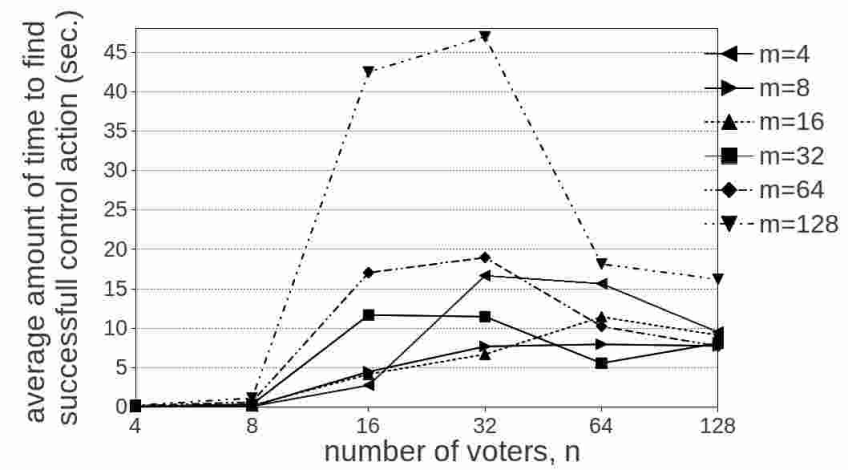


Figure 329: Average time the algorithm needs to find a successful control action for constructive control by partition of voters in model TE in Bucklin elections in the IC model. The maximum is 47 seconds.

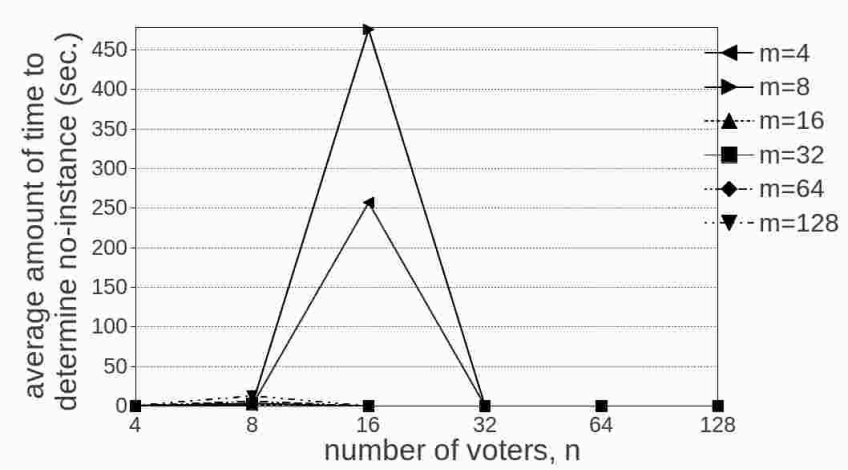


Figure 330: Average time the algorithm needs to determine no-instance of constructive control by partition of voters in model TE in Bucklin elections in the IC model. The maximum is 475,79 seconds.

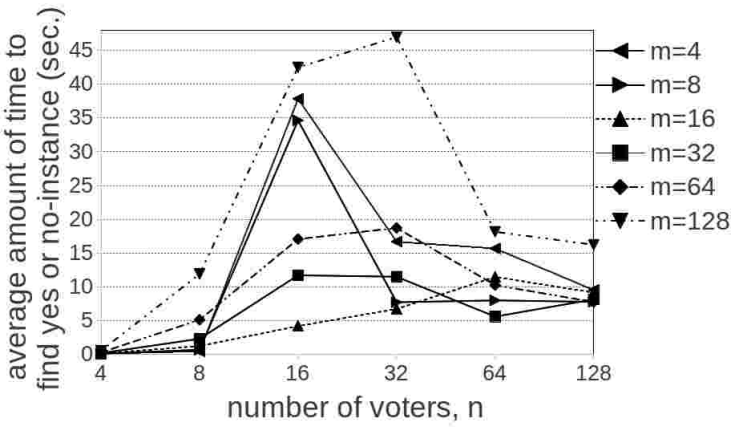


Figure 331: Average time the algorithm needs to give a definite output for constructive control by partition of voters in model TE in Bucklin elections in the IC model. The maximum is 47 seconds.

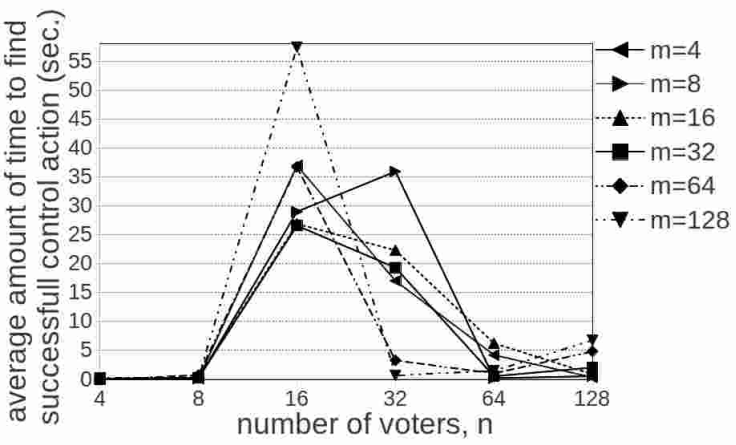


Figure 332: Average time the algorithm needs to find a successful control action for constructive control by partition of voters in model TE in Bucklin elections in the TM model. The maximum is $57,39$ seconds.

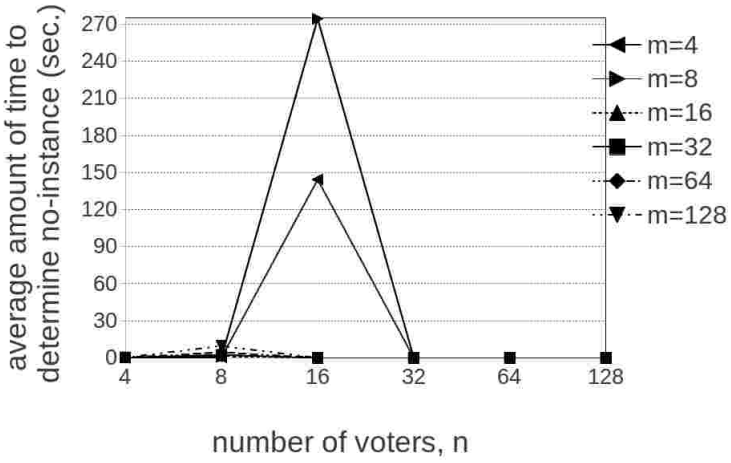


Figure 333: Average time the algorithm needs to determine no-instance of constructive control by partition of voters in model TE in Bucklin elections in the TM model. The maximum is 274,43 seconds.

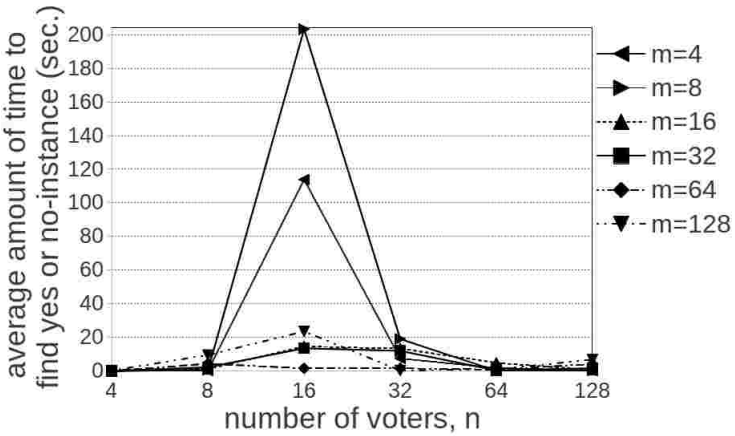


Figure 334: Average time the algorithm needs to give a definite output for constructive control by partition of voters in model TE in Bucklin elections in the TM model. The maximum is 203,24 seconds.

B.16. Destructive Control by Partition of Voters in Model TE

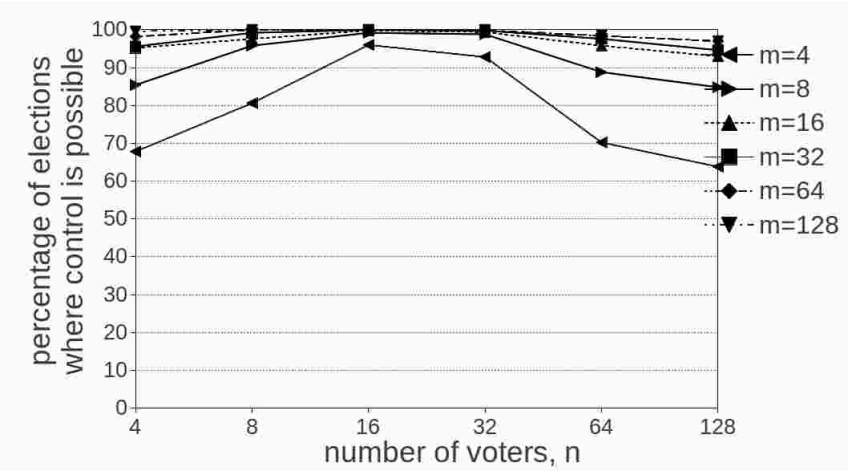


Figure 335: Results for Bucklin voting in the IC model for destructive control by partition of voters in model TE. Number of candidates is fixed.

	$m=4$						$m=8$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	339	403	480	464	351	319	427	479	496	494	444	424
# ci	161	97	20	6	0	0	73	21	4	0	0	0
# to	0	0	0	30	149	181	0	0	0	6	56	76
	$m=16$						$m=32$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	476	488	499	497	479	465	478	496	500	499	488	473
# ci	2	12	0	0	0	0	22	4	0	0	0	0
# to	0	0	1	3	21	35	0	0	0	1	12	27
	$m=64$						$m=128$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	491	500	500	499	492	485	498	500	500	500	492	485
# ci	9	0	0	0	0	0	2	0	0	0	0	0
# to	0	0	0	1	8	15	0	0	0	0	8	15

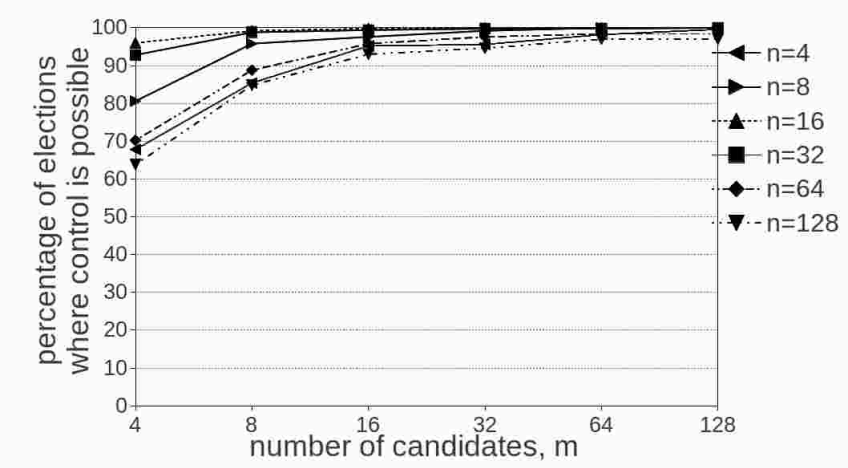


Figure 336: Results for Bucklin voting in the IC model for destructive control by partition of voters in model TE. Number of voters is fixed.

	$n=4$						$n=8$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	339	427	476	478	491	498	403	479	488	496	500	500
# ci	161	73	24	22	9	2	97	21	12	4	0	0
# to	0	0	0	0	0	0	0	0	0	0	0	0
	$n=16$						$n=32$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	480	496	499	500	500	500	464	494	497	499	499	500
# ci	20	4	0	0	0	0	6	0	0	0	0	0
# to	0	0	1	0	0	0	30	6	3	1	1	0
	$n=64$						$n=128$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	351	444	479	488	492	492	319	424	465	473	485	485
# ci	0	0	0	0	0	0	0	0	0	0	0	0
# to	149	56	21	12	8	8	181	76	35	27	15	15

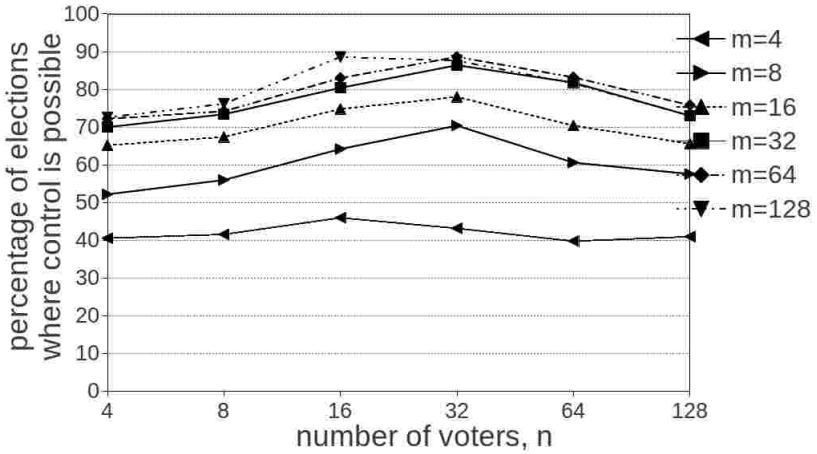


Figure 337: Results for Bucklin voting in the TM model for destructive control by partition of voters in model TE. Number of candidates is fixed.

	$m=4$						$m=8$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	203	208	230	216	199	205	261	280	321	352	303	288
# ci	297	292	270	205	170	120	239	220	179	92	83	69
# to	0	0	0	79	131	175	0	0	0	56	114	143
	$m=16$						$m=32$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	326	337	374	390	352	328	350	367	402	432	409	365
# ci	174	163	94	66	35	30	150	133	82	25	13	19
# to	0	0	32	44	113	142	0	0	16	43	78	116
	$m=64$						$m=128$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	361	371	415	443	416	379	363	381	443	438	408	365
# ci	139	129	71	27	8	6	137	119	45	24	4	5
# to	0	0	14	30	76	115	0	0	12	38	88	130

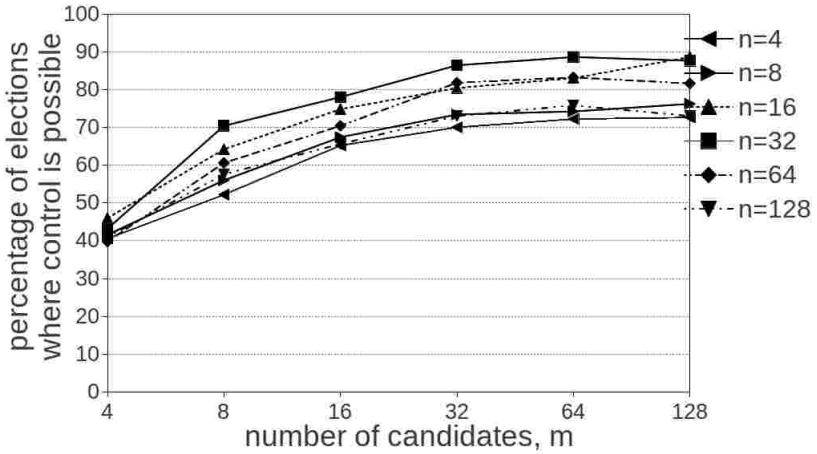


Figure 338: Results for Bucklin voting in the TM model for destructive control by partition of voters in model TE. Number of voters is fixed.

	$n=4$						$n=8$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	203	261	326	350	361	363	208	280	337	367	371	381
# ci	297	239	174	150	139	137	292	220	163	133	129	119
# to	0	0	0	0	0	0	0	0	0	0	0	0
	$n=16$						$n=32$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	230	321	374	402	415	443	216	352	390	432	443	438
# ci	270	179	94	82	71	45	205	92	66	25	27	24
# to	0	0	32	16	14	12	79	56	44	43	30	38
	$n=64$						$n=128$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	199	303	352	409	416	408	205	288	328	365	379	365
# ci	170	83	35	13	8	4	120	69	3	19	6	5
# to	131	114	113	78	76	88	175	143	142	116	115	130

B.16.1. Computational Costs

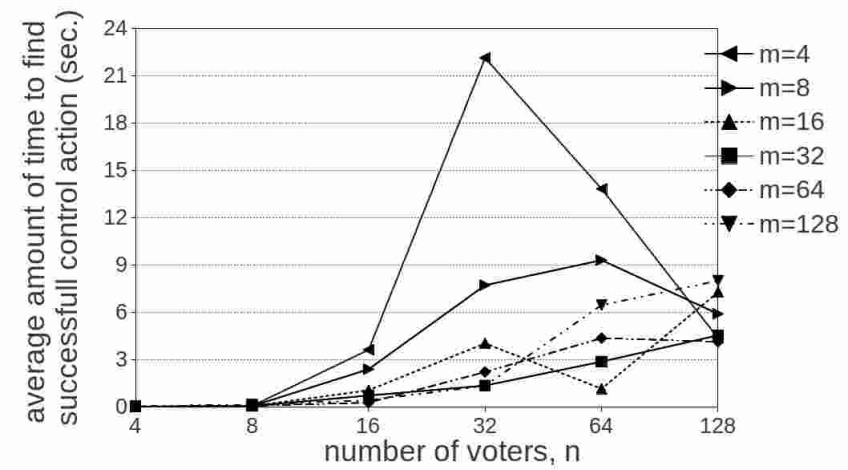


Figure 339: Average time the algorithm needs to find a successful control action for destructive control by partition of voters in model TE in Bucklin elections in the IC model. The maximum is 22,15 seconds.

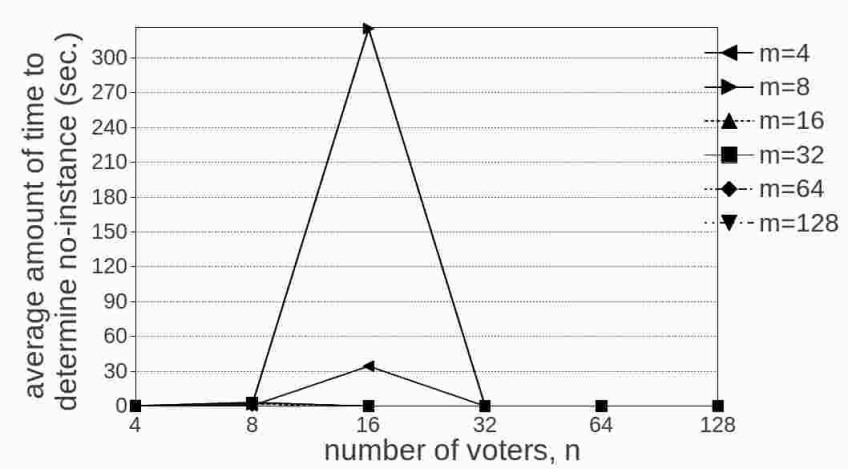


Figure 340: Average time the algorithm needs to determine no-instance of destructive control by partition of voters in model TE in Bucklin elections in the IC model. The maximum is 325,26 seconds.

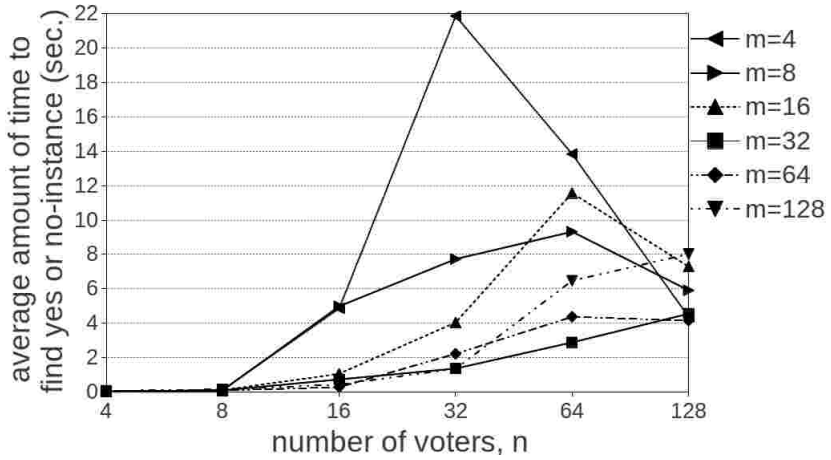


Figure 341: Average time the algorithm needs to give a definite output for destructive control by partition of voters in model TE in Bucklin elections in the IC model. The maximum is 21,87 seconds.

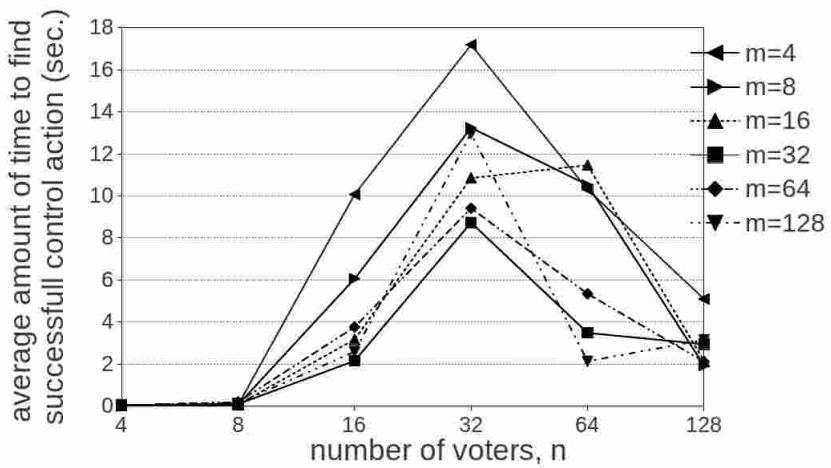


Figure 342: Average time the algorithm needs to find a successful control action for destructive control by partition of voters in model TE in Bucklin elections in the TM model. The maximum is 17,19 seconds.

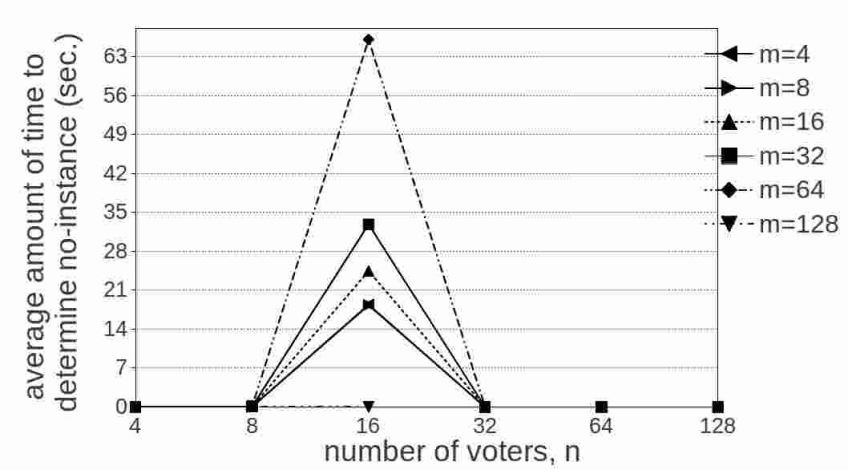


Figure 343: Average time the algorithm needs to determine no-instance of destructive control by partition of voters in model TE in Bucklin elections in the TM model. The maximum is 57,94 seconds.

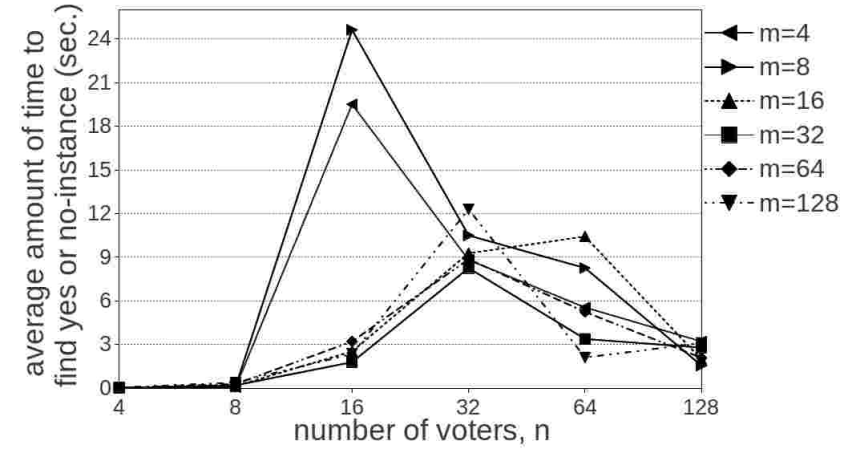


Figure 344: Average time the algorithm needs to give a definite output for destructive control by partition of voters in model TE in Bucklin elections in the TM model. The maximum is 24,63 seconds.

B.17. Constructive Control by Partition of Voters in Model TP

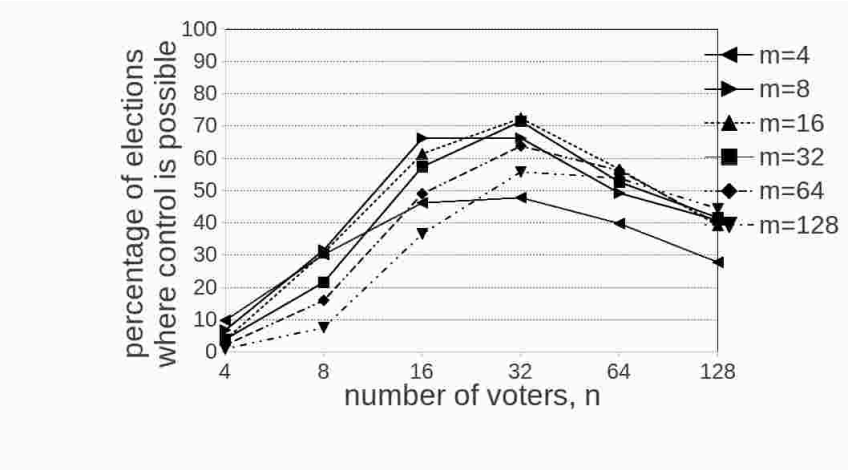


Figure 345: Results for Bucklin voting in the IC model for constructive control by partition of voters in model TP. Number of candidates is fixed.

	$m=4$						$m=8$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	49	151	231	239	199	139	34	158	331	331	246	204
# ci	451	349	269	0	0	0	466	342	53	0	0	0
# to	0	0	0	261	301	361	0	0	116	169	254	296
	$m=16$						$m=32$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	19	154	307	362	283	196	20	108	287	357	263	208
# ci	481	346	0	0	0	0	480	392	0	0	0	0
# to	0	0	193	138	217	304	0	0	213	143	237	292
	$m=64$						$m=128$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	11	80	245	319	281	199	5	38	183	279	269	222
# ci	489	420	0	0	0	0	495	462	0	0	0	0
# to	0	0	255	181	219	301	0	0	317	221	231	278

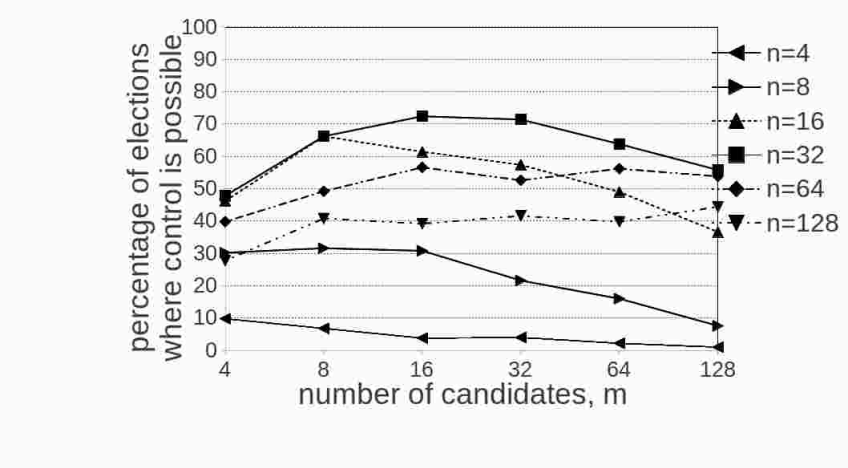


Figure 346: Results for Bucklin voting in the IC model for constructive control by partition of voters in model TP. Number of voters is fixed.

	$n=4$						$n=8$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	49	34	19	20	11	5	151	158	154	108	80	38
# ci	451	466	481	480	489	495	349	342	346	392	420	462
# to	0	0	0	0	0	0	0	0	0	0	0	0
	$n=16$						$n=32$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	231	331	307	287	245	183	239	331	362	357	319	279
# ci	269	53	0	0	0	0	0	0	0	0	0	0
# to	0	116	193	213	255	317	261	169	138	143	181	221
	$n=64$						$n=128$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	199	246	283	263	281	269	139	204	196	208	199	222
# ci	0	0	0	0	0	0	0	0	0	0	0	0
# to	301	254	217	237	219	231	361	296	304	292	301	278

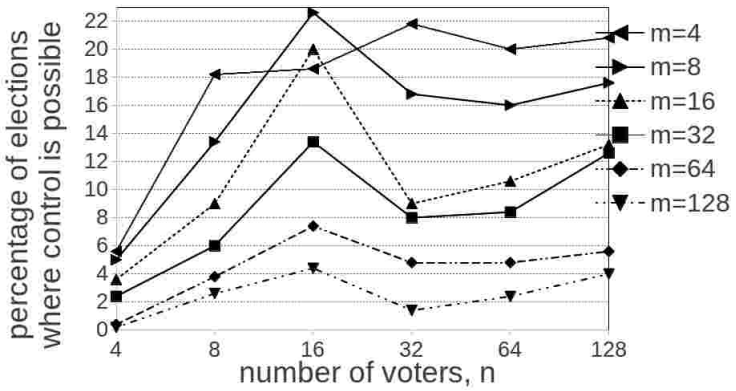


Figure 347: Results for Bucklin voting in the TM model for constructive control by partition of voters in model TP. Number of candidates is fixed.

	$m=4$						$m=8$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	28	91	93	109	100	104	25	67	113	84	80	88
# ci	472	409	407	189	159	151	475	433	319	106	84	67
# to	0	0	0	202	241	281	0	0	68	310	336	345
	$m=16$						$m=32$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	18	45	100	45	53	66	12	30	67	40	42	63
# ci	482	455	97	54	26	34	488	470	63	35	14	18
# to	0	0	303	401	421	400	0	0	370	425	444	419
	$m=64$						$m=128$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	2	19	37	24	24	28	1	13	22	7	12	20
# ci	498	481	60	28	5	8	499	487	40	20	6	0
# to	0	0	403	448	471	464	0	0	438	473	482	480

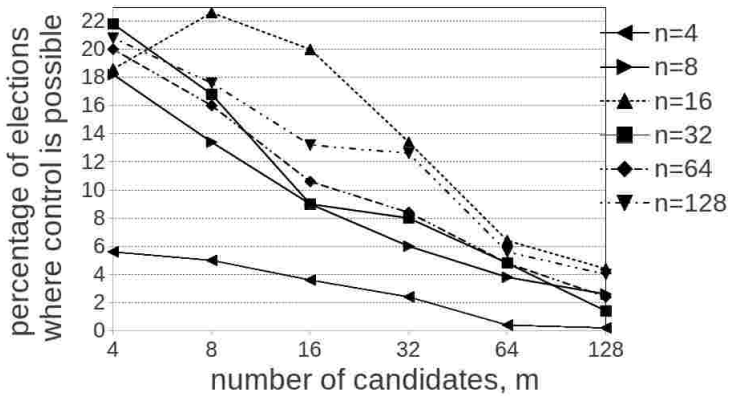


Figure 348: Results for Bucklin voting in the TM model for constructive control by partition of voters in model TP. Number of voters is fixed.

	$n=4$						$n=8$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	28	25	18	12	2	1	91	67	45	30	19	13
# ci	472	475	482	488	498	499	409	433	455	470	481	487
# to	0	0	0	0	0	0	0	0	0	0	0	0
	$n=16$						$n=32$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	93	113	100	67	37	22	109	84	45	40	24	7
# ci	407	319	97	63	40	4	189	106	54	35	28	20
# to	0	68	303	370	438	438	202	310	401	425	448	473
	$n=64$						$n=128$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	100	80	53	42	24	12	104	88	66	63	28	20
# ci	159	84	26	14	5	6	115	67	34	18	8	0
# to	241	336	421	444	471	482	281	345	400	419	464	480

B.17.1. Computational Costs

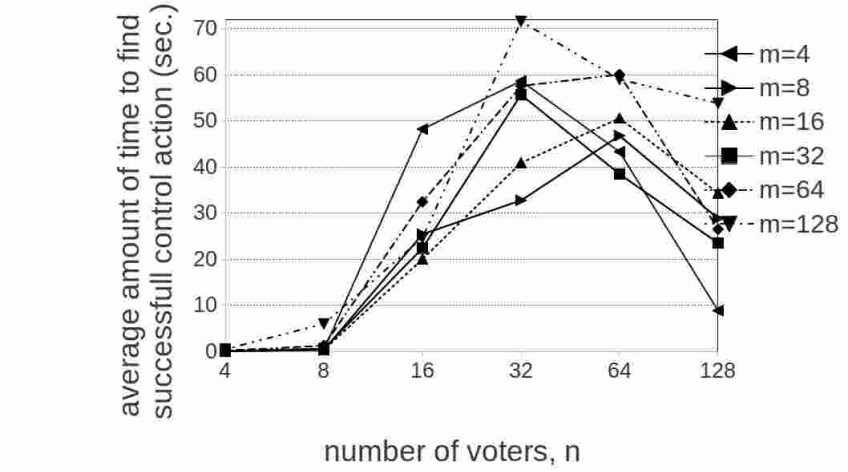


Figure 349: Average time the algorithm needs to find a successful control action for constructive control by partition of voters in model TP in Bucklin elections in the IC model. The maximum is $71,61$ seconds.

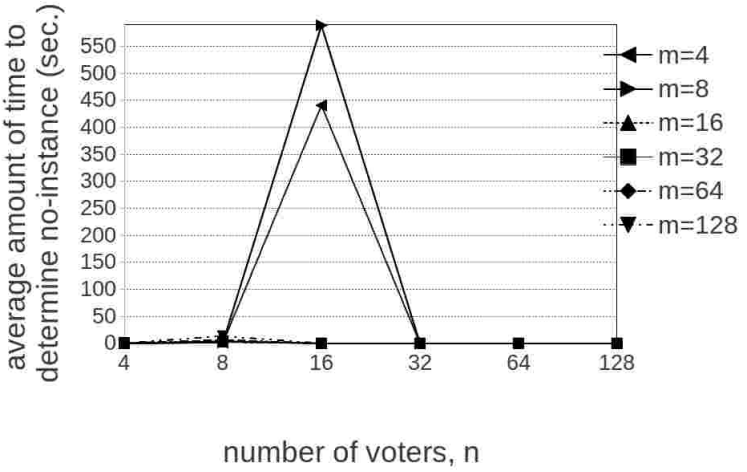


Figure 350: Average time the algorithm needs to determine no-instance of constructive control by partition of voters in model TP in Bucklin elections in the IC model. The maximum is $588,49$ seconds.

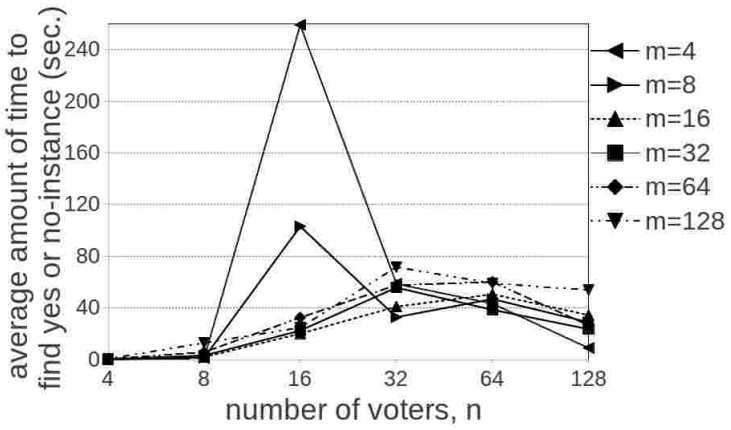


Figure 351: Average time the algorithm needs to give a definite output for constructive control by partition of voters in model TP in Bucklin elections in the IC model. The maximum is 259,19 seconds.

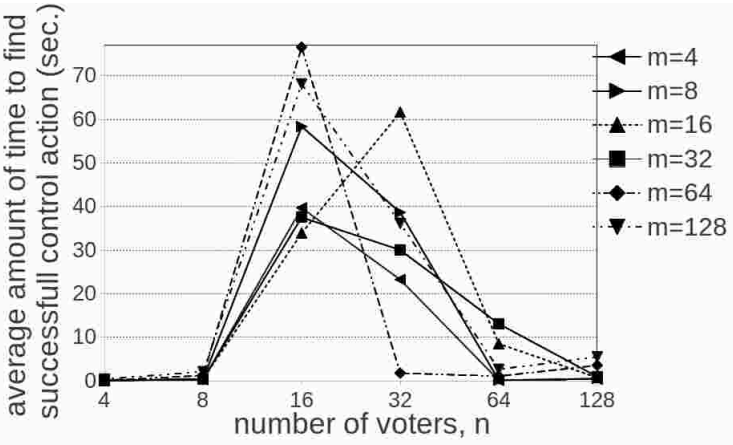


Figure 352: Average time the algorithm needs to find a successful control action for constructive control by partition of voters in model TP in Bucklin elections in the TM model. The maximum is 76,56 seconds.

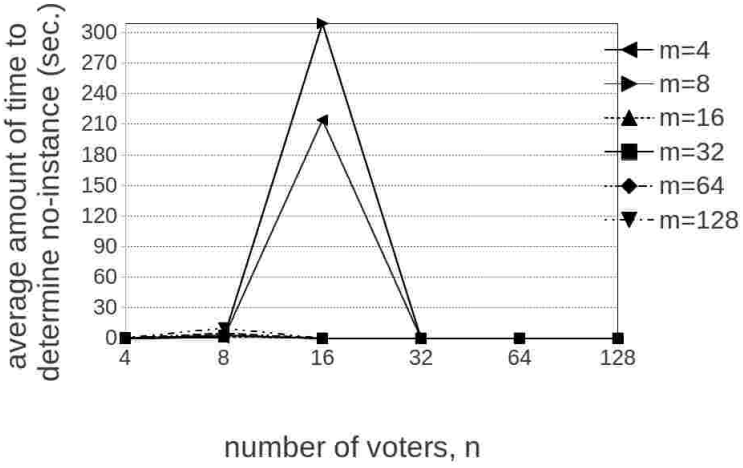


Figure 353: Average time the algorithm needs to determine no-instance of constructive control by partition of voters in model TP in Bucklin elections in the TM model. The maximum is $308,87$ seconds.

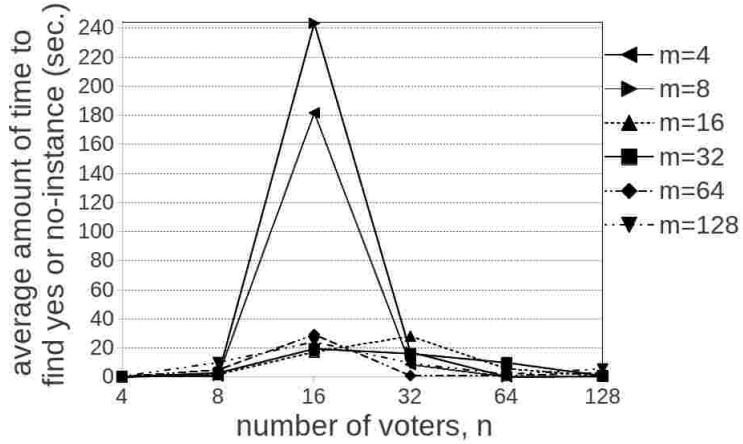


Figure 354: Average time the algorithm needs to give a definite output for constructive control by partition of voters in model TP in Bucklin elections in the TM model. The maximum is $243,35$ seconds.

B.18. Destructive Control by Partition of Voters in Model TP

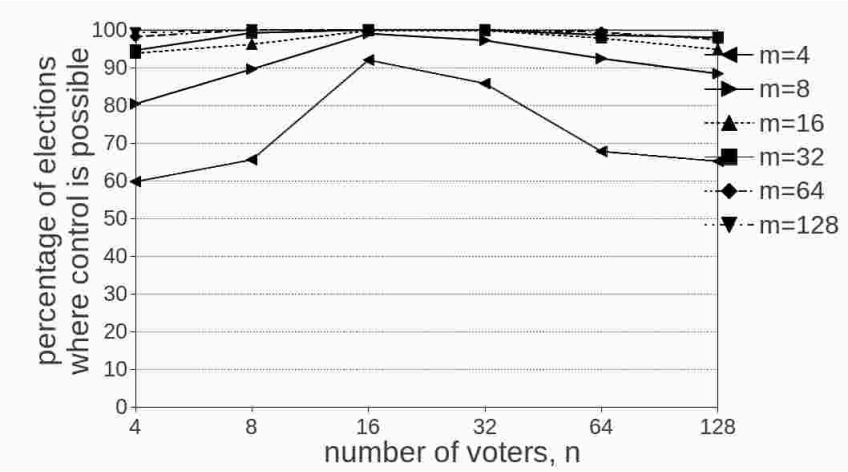


Figure 355: Results for Bucklin voting in the IC model for destructive control by partition of voters in model TP. Number of candidates is fixed.

	$m = 4$						$m = 8$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	299	328	460	429	339	326	402	448	495	486	462	442
# ci	201	172	40	6	0	0	98	52	5	0	0	0
# to	0	0	0	65	161	174	0	0	0	14	38	58
	$m = 16$						$m = 32$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	469	481	499	499	489	474	473	496	500	500	493	490
# ci	31	19	0	0	0	0	27	4	0	0	0	0
# to	0	0	1	1	11	26	0	0	0	0	7	10
	$m = 64$						$m = 128$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	491	500	500	500	497	487	496	500	500	500	494	490
# ci	1	0	0	0	0	0	4	0	0	0	0	0
# to	0	0	0	0	3	13	0	0	0	0	6	10

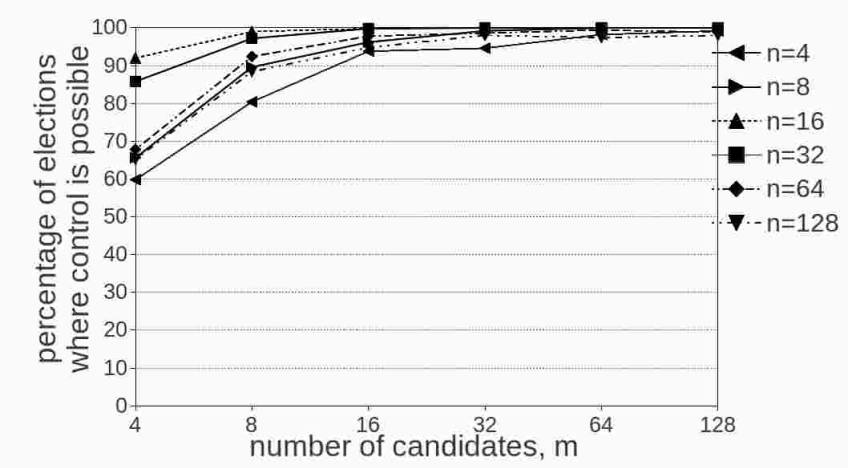


Figure 356: Results for Bucklin voting in the IC model for destructive control by partition of voters in model TP. Number of voters is fixed.

	$n=4$						$n=8$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	299	402	469	473	491	496	328	448	481	496	500	500
# ci	201	98	31	27	9	4	172	52	19	4	0	0
# to	0	0	0	0	0	0	0	0	0	0	0	0
	$n=16$						$n=32$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	460	495	499	500	500	500	429	486	499	500	500	500
# ci	40	5	0	0	0	0	6	0	0	0	0	0
# to	0	0	1	0	0	0	65	14	1	0	0	0
	$n=64$						$n=128$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	339	462	489	493	497	494	326	442	474	490	487	490
# ci	0	0	0	0	0	0	0	0	0	0	0	0
# to	161	38	11	7	3	6	174	58	26	10	13	10

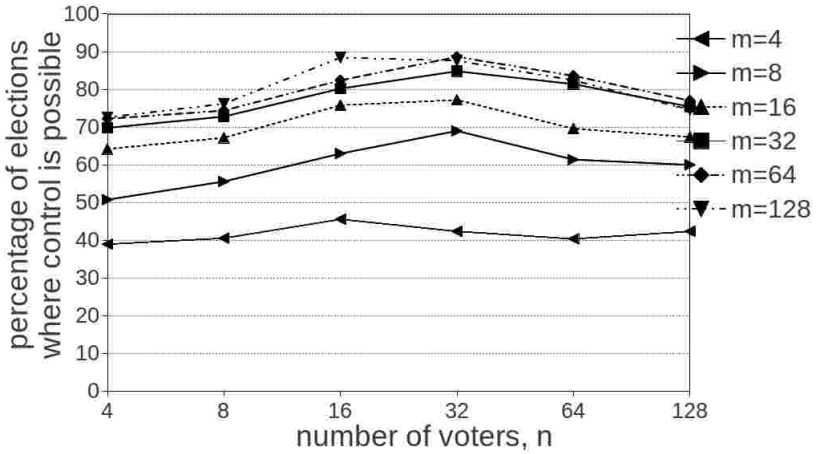


Figure 357: Results for Bucklin voting in the TM model for destructive control by partition of voters in model TP. Number of candidates is fixed.

	$m=4$						$m=8$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	195	203	228	212	202	212	254	278	315	345	307	300
# ci	305	297	272	205	170	120	246	222	185	92	83	69
# to	0	0	0	83	128	168	0	0	0	63	110	131

	$m=16$						$m=32$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	321	336	379	386	348	337	349	364	401	424	407	377
# ci	179	164	94	66	35	30	151	136	82	25	13	19
# to	0	0	27	48	117	133	0	0	17	51	80	104

	$m=64$						$m=128$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	361	372	414	443	418	385	363	381	442	438	412	373
# ci	139	128	71	27	8	6	137	119	45	24	4	5
# to	0	0	15	30	74	109	0	0	13	38	84	122

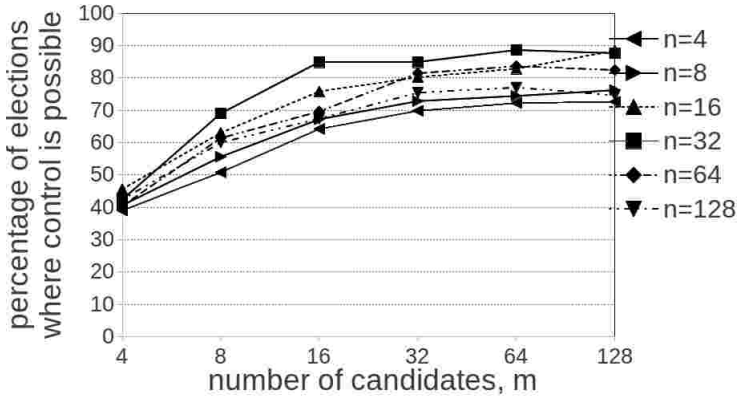


Figure 358: Results for Bucklin voting in the TM model for destructive control by partition of voters in model TP. Number of voters is fixed.

	$n=4$						$n=8$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	195	254	321	349	361	363	203	278	336	364	372	381
# ci	305	246	179	151	139	137	297	222	164	136	128	119
# to	0	0	0	0	0	0	0	0	0	0	0	0
	$n=16$						$n=32$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	228	315	379	401	414	442	212	345	386	424	443	438
# ci	272	185	94	82	71	45	205	92	66	25	27	24
# to	0	0	27	17	15	13	83	63	48	51	30	38
	$n=64$						$n=128$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	202	307	348	407	418	412	212	212	300	377	385	373
# ci	170	83	35	13	8	4	120	120	69	19	6	5
# to	128	110	117	80	74	84	168	168	131	104	109	122

B.18.1. Computational Costs

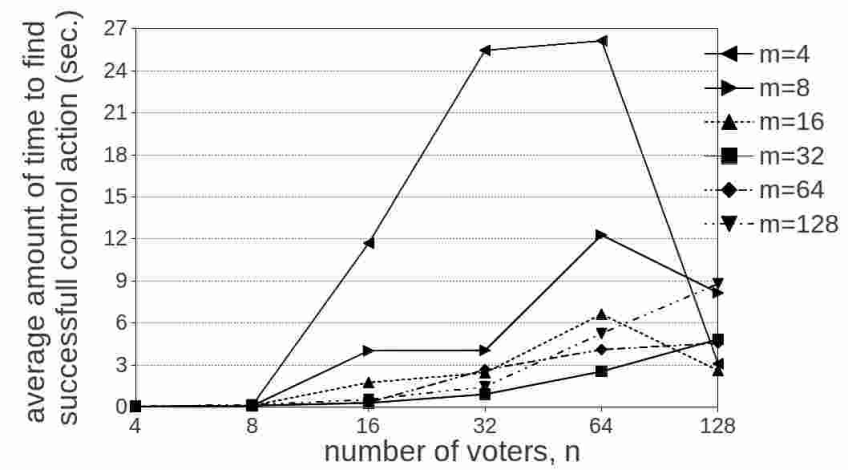


Figure 359: Average time the algorithm needs to find a successful control action for destructive control by partition of voters in model TP in Bucklin elections in the IC model. The maximum is 26,14 seconds.

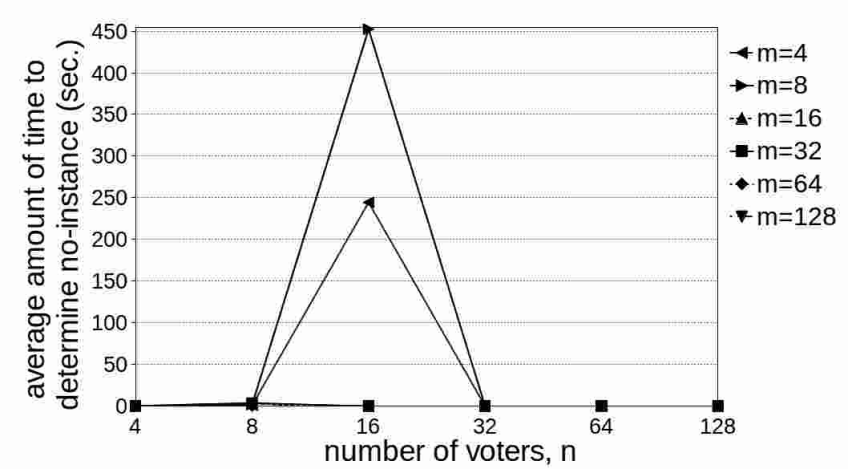


Figure 360: Average time the algorithm needs to determine no-instance of destructive control by partition of voters in model TP in Bucklin elections in the IC model. The maximum is 452,32 seconds.

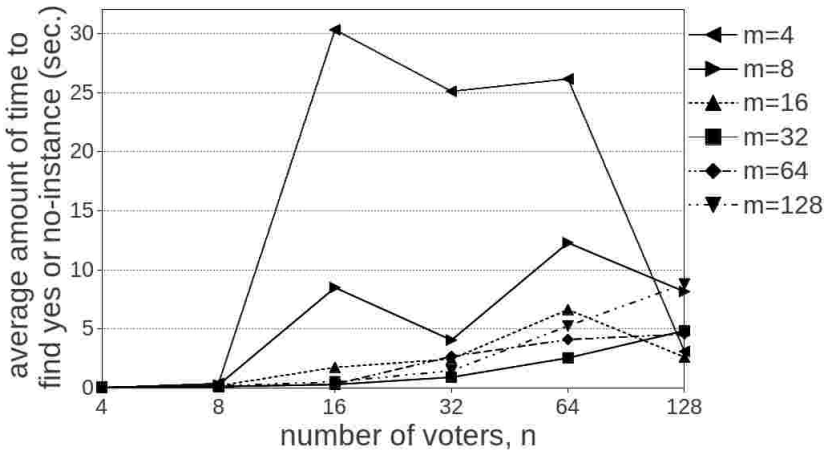


Figure 361: Average time the algorithm needs to give a definite output for destructive control by partition of voters in model TP in Bucklin elections in the IC model. The maximum is $30,3$ seconds.

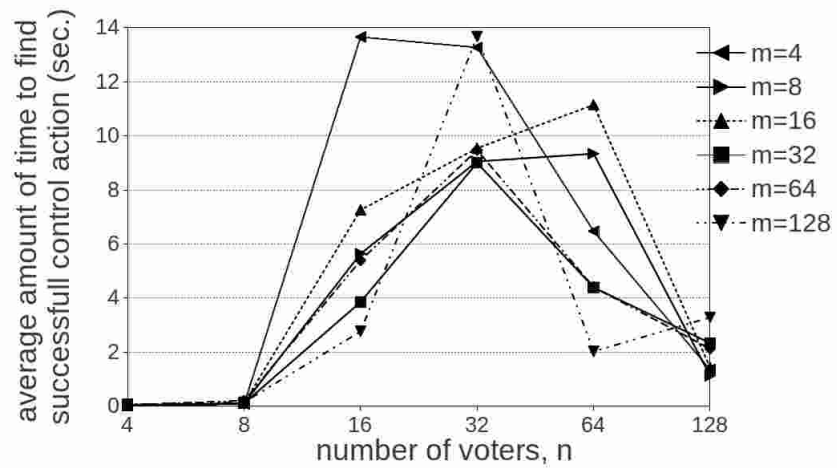


Figure 362: Average time the algorithm needs to find a successful control action for destructive control by partition of voters in model TP in Bucklin elections in the TM model. The maximum is $13,68$ seconds.

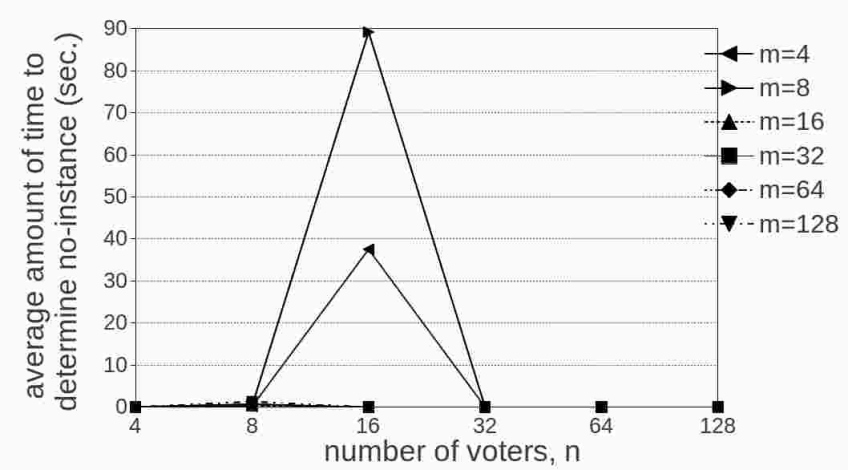


Figure 363: Average time the algorithm needs to determine no-instance of destructive control by partition of voters in model TP in Bucklin elections in the TM model. The maximum is 89,22 seconds.

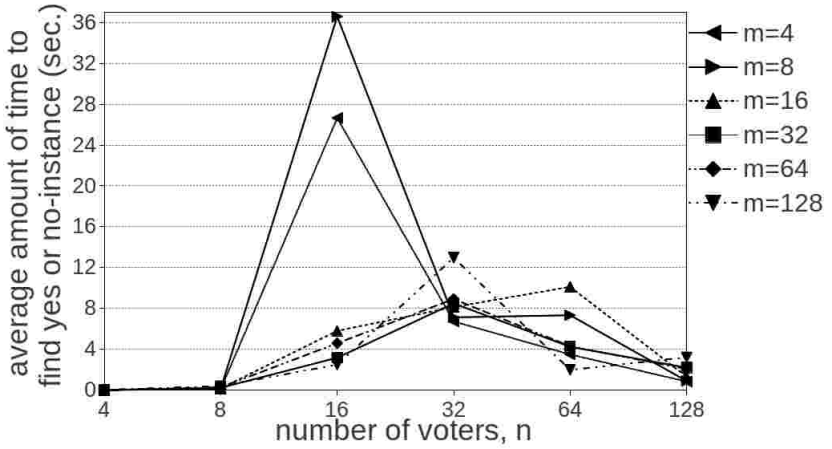


Figure 364: Average time the algorithm needs to give a definite output for destructive control by partition of voters in model TP in Bucklin elections in the TM model. The maximum is 36,57 seconds.

C. Plurality Voting

C.1. Constructive Control by Adding Candidates

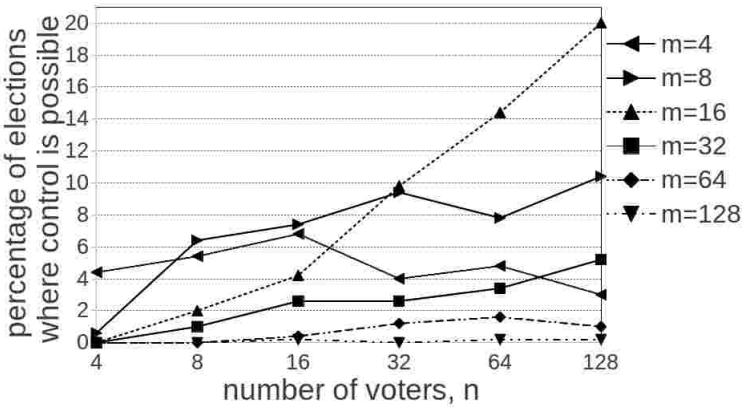


Figure 365: Results for plurality voting in the IC model for constructive control by adding candidates. Number of candidates is fixed.

	$m=4$						$m=8$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	22	27	34	20	24	15	3	32	37	47	39	52
# ci	478	473	466	480	476	485	497	468	463	453	461	448
# to	0	0	0	0	0	0	0	0	0	0	0	0
	$m=16$						$m=32$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	0	10	21	49	72	100	0	5	13	13	17	26
# ci	500	490	479	451	428	310	0	0	0	0	0	7
# to	0	0	0	0	0	90	500	495	487	437	483	467
	$m=64$						$m=128$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	0	0	2	6	8	5	0	0	1	0	1	1
# ci	0	0	0	0	0	0	0	0	0	0	0	0
# to	500	500	498	496	492	495	500	500	499	500	499	499

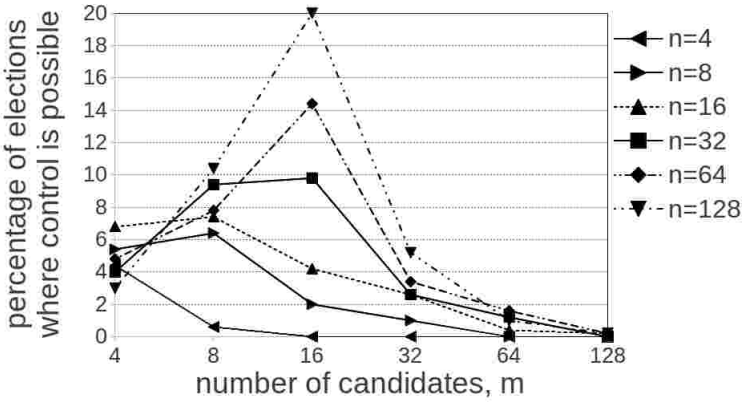


Figure 366: Results for plurality voting in the IC model for constructive control by adding candidates. Number of voters is fixed.

	$n=4$						$n=8$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	22	3	0	0	0	0	27	32	10	5	0	0
# ci	478	497	500	0	0	0	473	468	490	0	0	0
# to	0	0	0	500	500	500	0	0	0	495	500	500
	$n=16$						$n=32$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	34	37	21	13	2	1	20	47	49	13	6	0
# ci	466	463	479	0	0	0	480	453	451	0	0	0
# to	0	0	0	487	498	499	0	0	0	487	494	500
	$n=64$						$n=128$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	24	39	72	17	8	1	15	52	100	26	5	1
# ci	476	461	428	0	0	0	485	448	310	7	0	0
# to	0	0	0	483	492	499	0	0	90	467	495	499

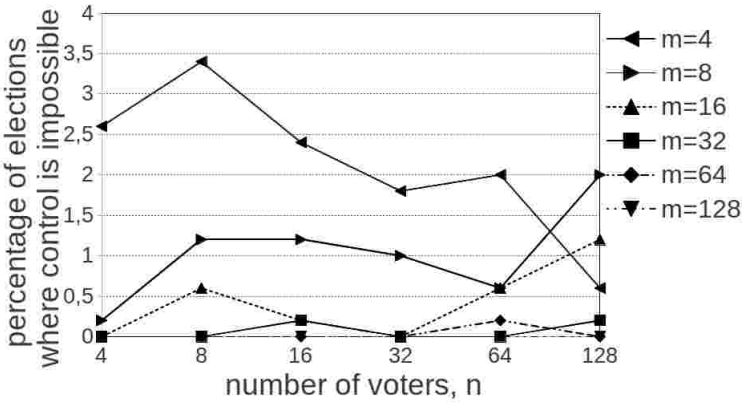


Figure 367: Results for plurality voting in the TM model for constructive control by adding candidates. Number of candidates is fixed.

	$m=4$						$m=8$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	13	17	12	9	10	3	1	6	6	5	3	1
# ci	487	483	488	491	490	497	499	494	494	495	497	499
# to	0	0	0	0	0	0	0	0	0	0	0	0
	$m=16$						$m=32$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	0	3	1	0	3	6	0	0	1	0	0	1
# ci	500	497	499	500	497	487	1	0	28	452	482	485
# to	0	0	0	0	0	7	499	500	471	48	18	14
	$m=64$						$m=128$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	0	0	0	0	1	0	0	0	0	0	0	0
# ci	0	0	0	6	447	491	0	0	0	0	0	456
# to	500	500	500	494	52	9	500	500	500	500	500	44

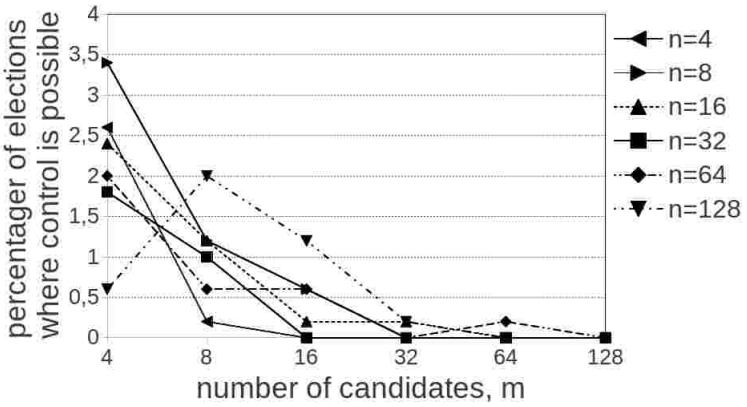


Figure 368: Results for plurality voting in the TM model for constructive control by adding candidates. Number of voters is fixed.

	$n=4$						$n=8$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	13	1	0	0	0	0	17	6	3	0	0	0
# ci	487	499	500	1	0	0	483	494	497	0	0	0
# to	0	0	0	499	500	500	0	0	0	500	500	500
	$n=16$						$n=32$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	12	6	1	1	0	0	9	5	0	0	0	0
# ci	488	494	499	28	0	0	491	495	500	452	6	0
# to	0	0	0	471	500	500	0	0	0	48	494	500
	$n=64$						$n=128$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	10	3	3	0	1	0	3	10	6	1	0	0
# ci	490	497	497	482	447	0	497	490	487	485	491	456
# to	0	0	0	18	52	500	0	0	7	14	9	44

C.1.1. Computational Costs

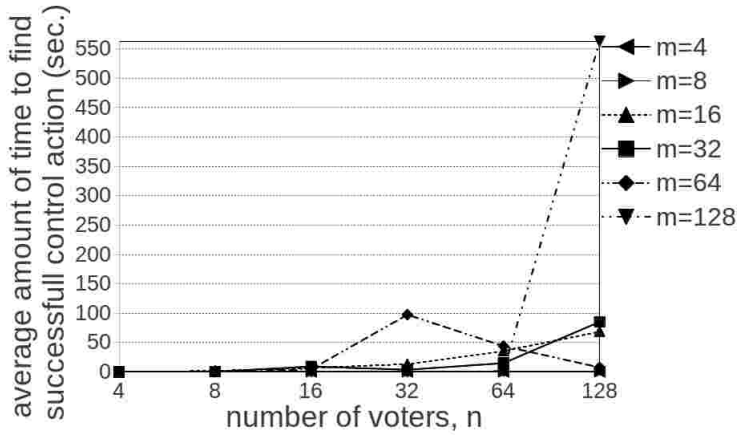


Figure 369: Average time the algorithm needs to find a successful control action for constructive control by adding candidates in plurality elections in the IC model. The maximum is 562,76 seconds.

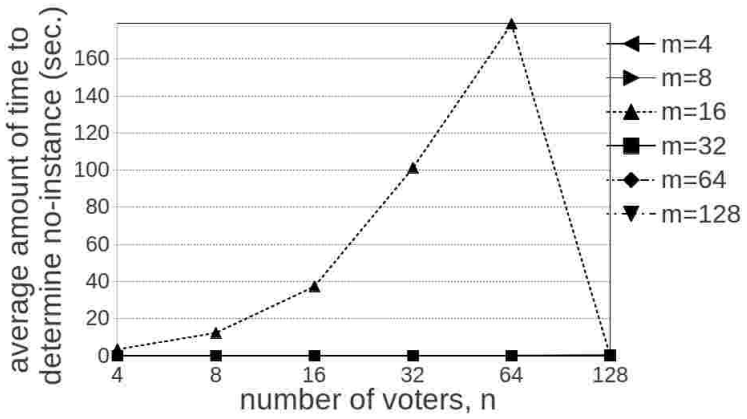


Figure 370: Average time the algorithm needs to determine no-instance of constructive control by adding candidates in plurality elections in the IC model. The maximum is 178,74 seconds.

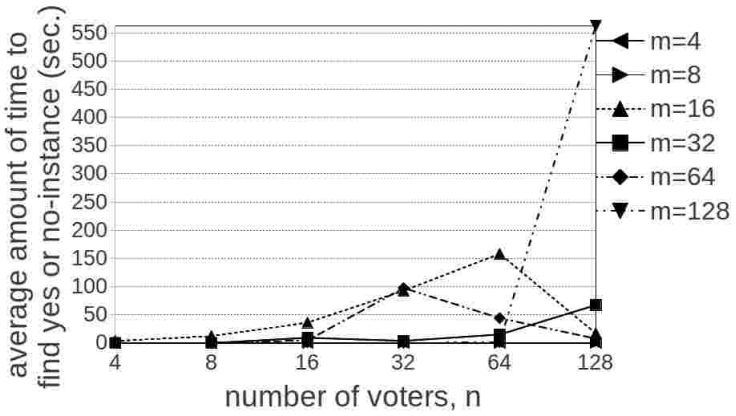


Figure 371: Average time the algorithm needs to give a definite output for constructive control by adding candidates in plurality elections in the IC model. The maximum is 562,76 seconds.

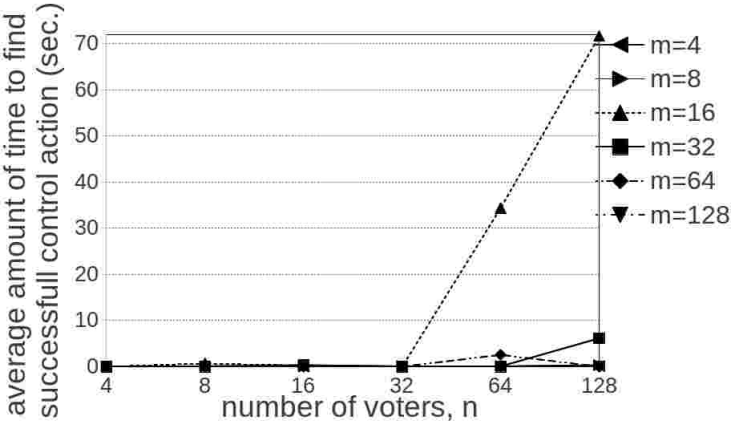


Figure 372: Average time the algorithm needs to find a successful control action for constructive control by adding candidates in plurality elections in the TM model. The maximum is 71,66 seconds.

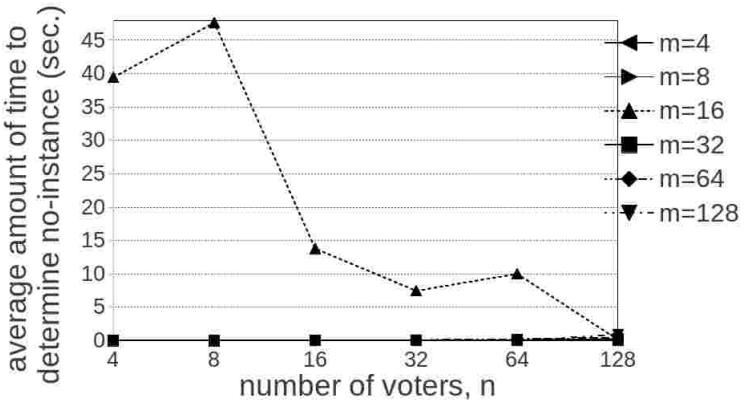


Figure 373: Average time the algorithm needs to determine no-instance of constructive control by adding candidates in plurality elections in the TM model. The maximum is 47,64 seconds.

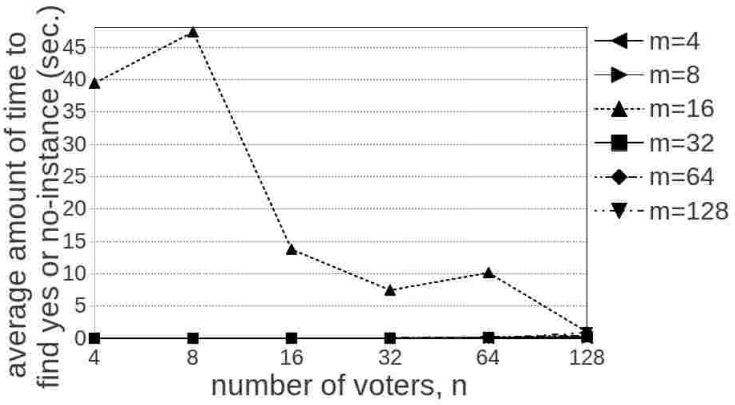


Figure 374: Average time the algorithm needs to give a definite output for constructive control by adding candidates in plurality elections in the TM model. The maximum is 47,35 seconds.

C.2. Destructive Control by Adding Candidates

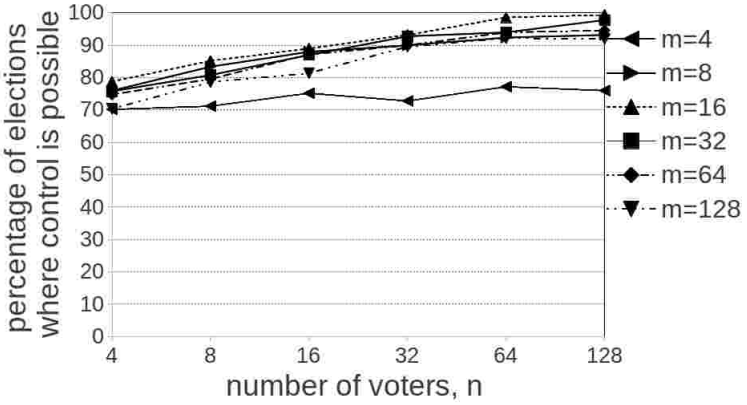


Figure 375: Results for plurality voting in the IC model for destructive control by adding candidates. Number of candidates is fixed.

	$m=4$						$m=8$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	351	356	376	364	386	380	380	417	440	450	462	466
# ci	149	144	124	136	114	120	120	83	60	50	38	34
# to	0	0	0	0	0	0	0	0	0	0	0	0
	$m=16$						$m=32$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	394	426	445	466	493	497	379	404	435	464	470	489
# ci	106	74	55	34	7	0	0	0	0	0	0	0
# to	0	0	0	0	0	3	121	96	65	36	30	11
	$m=64$						$m=128$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	374	398	436	450	470	473	352	393	407	448	461	460
# ci	0	0	0	0	0	0	0	0	0	0	0	0
# to	126	102	64	50	30	27	148	107	93	52	39	40

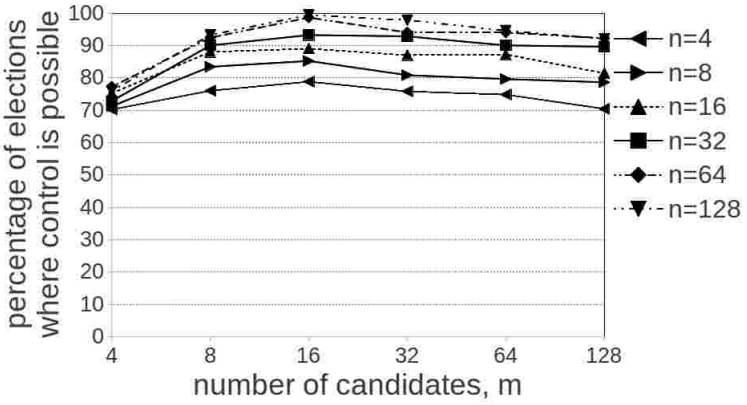


Figure 376: Results for plurality voting in the IC model for destructive control by adding candidates. Number of voters is fixed.

	$n=4$						$n=8$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	351	380	394	379	374	352	356	417	426	404	398	393
# ci	149	120	106	0	0	0	144	83	74	0	0	0
# to	0	0	0	121	126	148	0	0	0	96	102	107
	$n=16$						$n=32$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	367	440	445	435	436	407	364	450	466	464	450	448
# ci	124	60	55	0	0	0	136	50	34	0	0	0
# to	0	0	0	65	64	93	0	0	0	36	50	52
	$n=64$						$n=128$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	386	462	493	470	470	461	380	466	497	489	473	460
# ci	114	38	7	0	0	0	120	34	0	0	0	0
# to	0	0	0	30	30	39	0	0	3	11	27	40

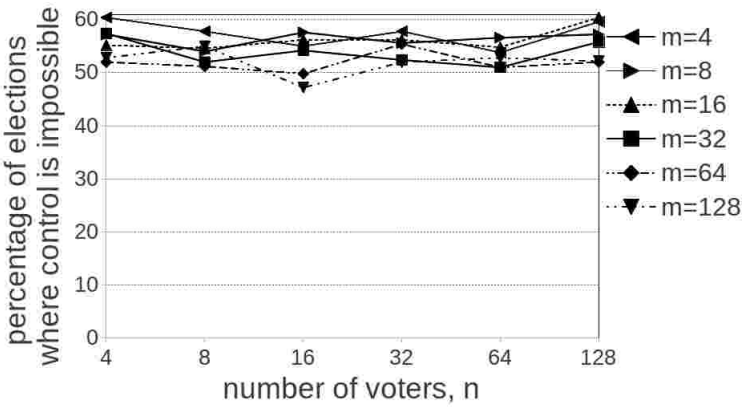


Figure 377: Results for plurality voting in the TM model for destructive control by adding candidates. Number of candidates is fixed.

	$m=4$						$m=8$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	302	289	275	289	269	298	286	270	288	278	283	286
# ci	198	211	225	211	231	202	214	230	212	222	217	214
# to	0	0	0	0	0	0	0	0	0	0	0	0
	$m=16$						$m=32$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	276	273	281	281	274	302	287	260	271	262	255	279
# ci	224	227	219	219	226	0	6	0	0	0	0	0
# to	0	0	0	0	0	198	207	240	229	238	245	221
	$m=64$						$m=128$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	260	256	249	277	255	260	264	275	236	260	264	261
# ci	11	0	0	0	0	0	8	0	0	0	0	0
# to	229	244	251	223	245	240	228	225	264	240	236	239

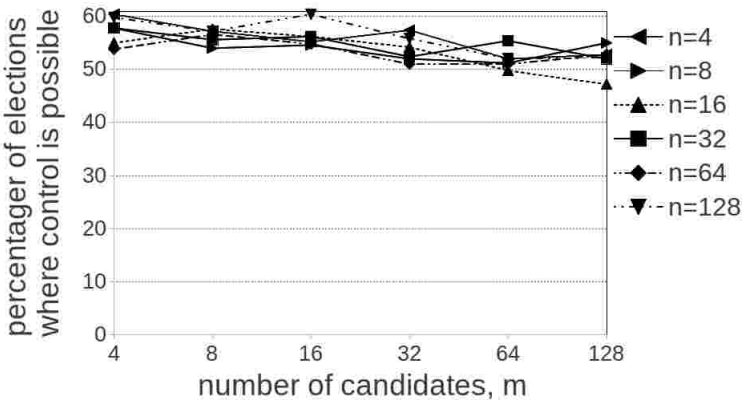


Figure 378: Results for plurality voting in the TM model for destructive control by adding candidates. Number of voters is fixed.

	$n=4$						$n=8$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	302	286	276	287	260	264	289	270	273	260	256	275
# ci	198	214	224	6	11	8	211	230	227	0	0	0
# to	0	0	0	229	229	228	0	0	0	240	244	225
	$n=16$						$n=32$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	275	288	281	271	249	236	289	278	281	262	277	260
# ci	225	212	219	0	0	0	211	222	219	0	0	0
# to	0	0	0	229	251	264	0	0	0	238	223	240
	$n=64$						$n=128$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	269	283	274	255	255	264	298	286	302	279	260	261
# ci	231	217	226	0	0	0	202	214	0	0	0	0
# to	0	0	0	245	245	236	0	0	198	221	240	239

C.2.1. Computational Costs

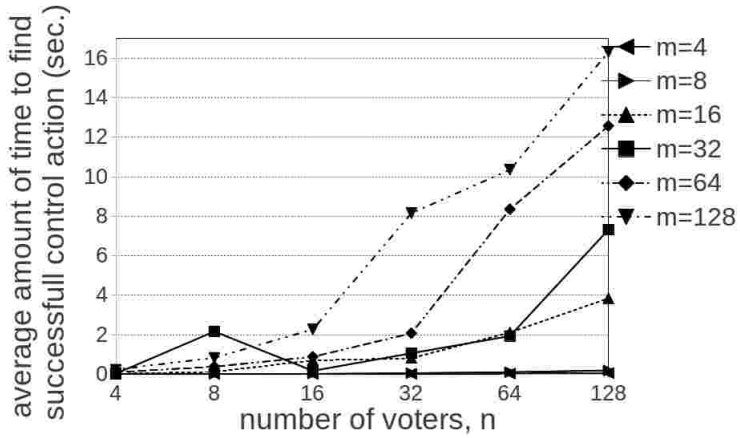


Figure 379: Average time the algorithm needs to find a successful control action for destructive control by adding candidates in plurality elections in the IC model. The maximum is 16,32 seconds.

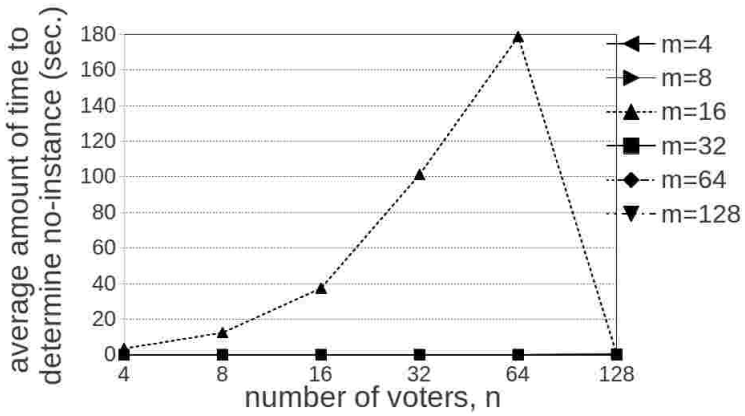


Figure 380: Average time the algorithm needs to determine no-instance of destructive control by adding candidates in plurality elections in the IC model. The maximum is 356,7 seconds.

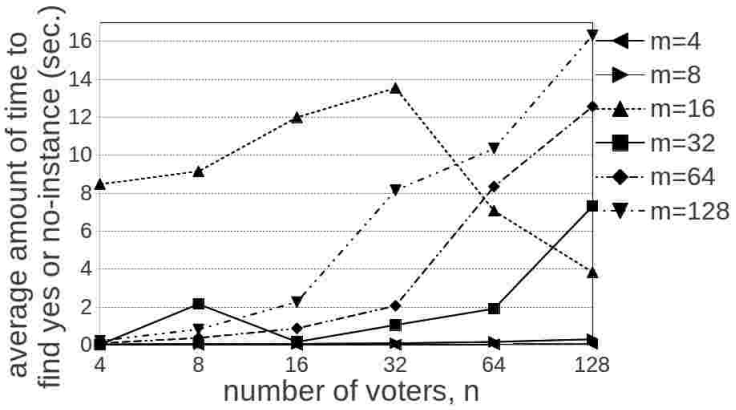


Figure 381: Average time the algorithm needs to give a definite output for destructive control by adding candidates in plurality elections in the IC model. The maximum is $16,32$ seconds.

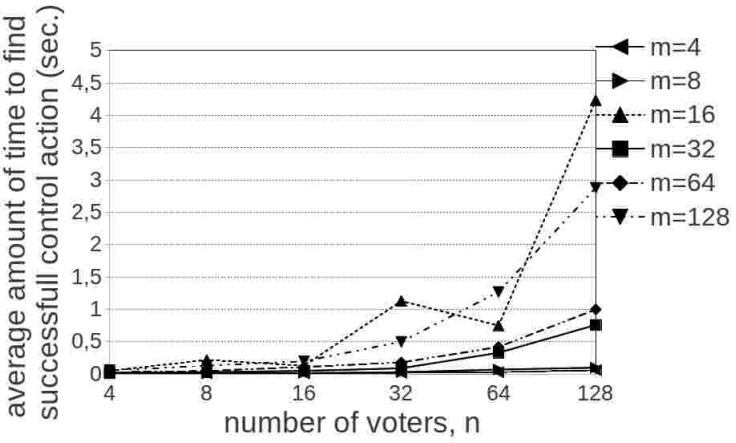


Figure 382: Average time the algorithm needs to find a successful control action for destructive control by adding candidates in plurality elections in the TM model. The maximum is $4,23$ seconds.

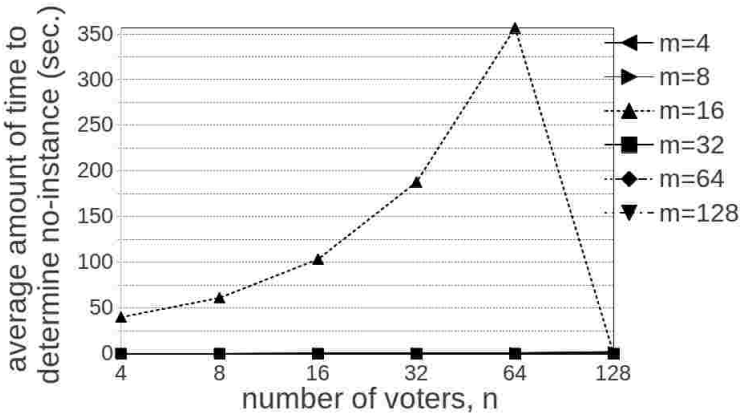


Figure 383: Average time the algorithm needs to determine no-instance of destructive control by adding candidates in plurality elections in the TM model. The maximum is 356,7 seconds.

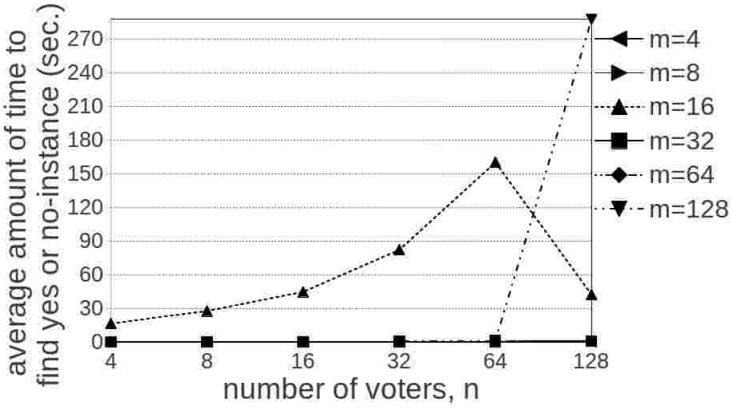


Figure 384: Average time the algorithm needs to give a definite output for destructive control by adding candidates in plurality elections in the TM model. The maximum is 287,86 seconds.

C.3. Constructive Control by Deleting Candidates

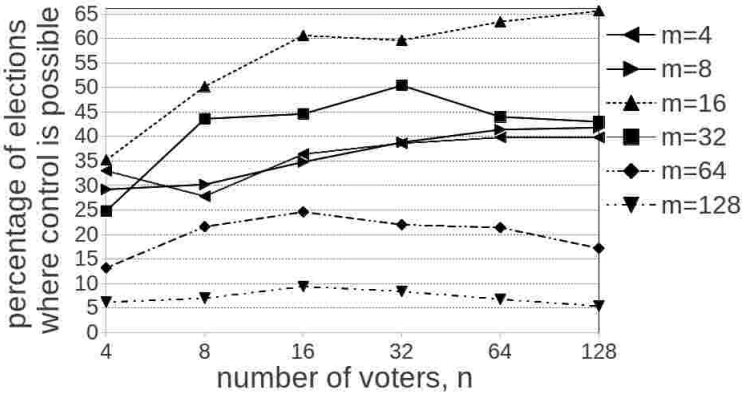


Figure 385: Results for plurality voting in the IC model for constructive control by deleting candidates. Number of candidates is fixed.

	$m=4$						$m=8$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	165	139	182	193	199	199	146	151	174	194	207	209
# ci	335	361	361	307	301	301	354	349	326	306	293	291
# to	0	0	0	0	0	0	0	0	0	0	0	0
	$m=16$						$m=32$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	176	251	303	298	317	328	124	218	223	252	220	215
# ci	324	249	197	202	183	172	0	0	0	0	0	0
# to	0	0	0	0	0	0	376	282	277	248	280	285
	$m=64$						$m=128$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	66	108	123	110	107	86	31	35	47	42	34	27
# ci	0	0	0	0	0	0	0	0	0	0	0	0
# to	434	392	377	390	393	414	469	465	453	458	466	473

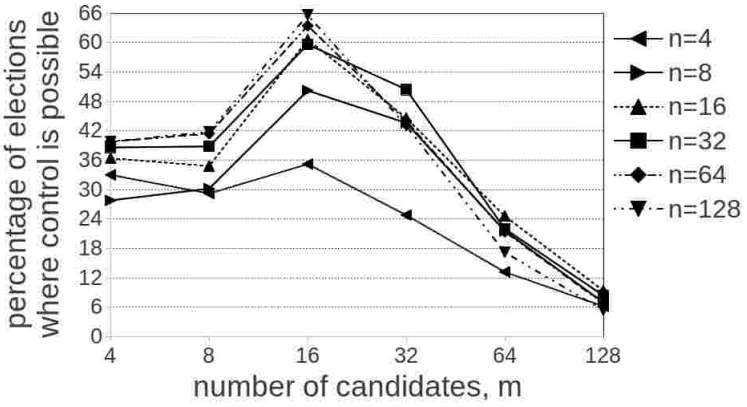


Figure 386: Results for plurality voting in the IC model for constructive control by deleting candidates. Number of voters is fixed.

	$n=4$						$n=8$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	165	146	176	124	66	31	139	151	251	218	108	35
# ci	335	354	324	0	0	0	361	349	249	0	0	0
# to	0	0	0	376	434	469	0	0	0	282	392	465
	$n=16$						$n=32$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	182	174	303	223	123	47	193	194	398	252	110	42
# ci	318	326	197	0	0	0	307	306	202	0	0	0
# to	0	0	0	277	377	453	0	0	0	248	390	458
	$n=64$						$n=128$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	199	207	317	220	107	34	199	209	328	215	86	27
# ci	301	293	183	0	0	0	301	291	172	0	0	0
# to	0	0	0	280	393	466	0	0	0	285	414	473

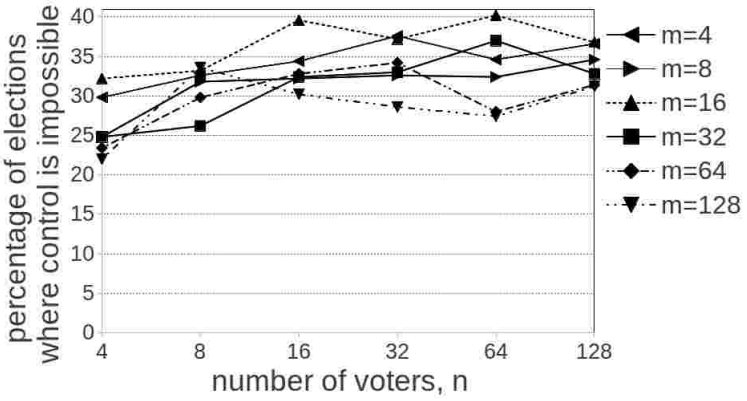


Figure 387: Results for plurality voting in the TM model for constructive control by deleting candidates. Number of candidates is fixed.

	$m=4$						$m=8$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	149	163	172	188	173	183	124	159	161	163	162	173
# ci	351	337	328	312	327	317	376	341	339	337	338	327
# to	0	0	0	0	0	0	0	0	0	0	0	0
	$m=16$						$m=32$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	161	166	198	186	201	184	124	131	162	165	185	164
# ci	339	334	302	314	299	316	1	0	0	0	0	0
# to	0	0	0	0	0	0	375	369	338	335	315	336
	$m=64$						$m=128$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	117	149	164	171	140	157	110	168	151	143	137	156
# ci	1	0	0	0	0	0	0	0	0	0	0	0
# to	382	351	336	329	360	343	390	332	349	357	363	344

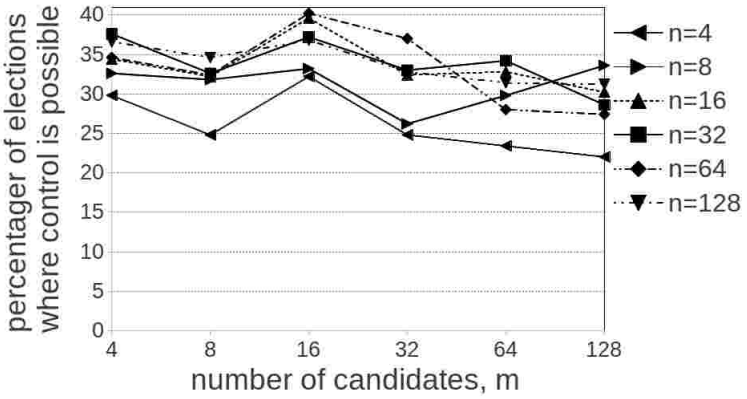


Figure 388: Results for plurality voting in the TM model for constructive control by deleting candidates. Number of voters is fixed.

	$n=4$						$n=8$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	149	124	161	124	117	110	163	159	166	131	149	168
# ci	351	376	339	1	1	0	337	341	334	0	0	0
# to	0	0	0	375	382	390	0	0	0	369	351	332
	$n=16$						$n=32$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	172	161	198	162	164	151	188	163	186	165	171	143
# ci	328	339	302	0	0	0	312	337	314	0	0	0
# to	0	0	0	338	336	349	0	0	0	335	329	357
	$n=64$						$n=128$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	173	162	201	185	140	137	183	173	184	164	157	156
# ci	327	338	299	0	0	0	317	327	316	0	0	0
# to	0	0	0	315	360	363	0	0	0	336	343	344

C.3.1. Computational Costs

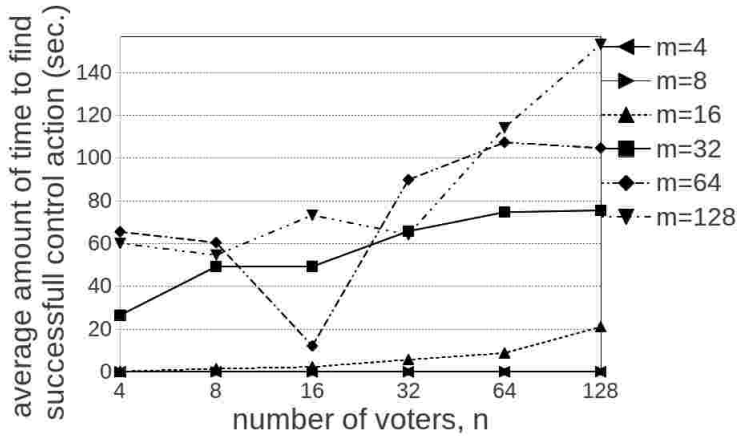


Figure 389: Average time the algorithm needs to find a successful control action for constructive control by deleting candidates in plurality elections in the IC model. The maximum is 153,26 seconds.

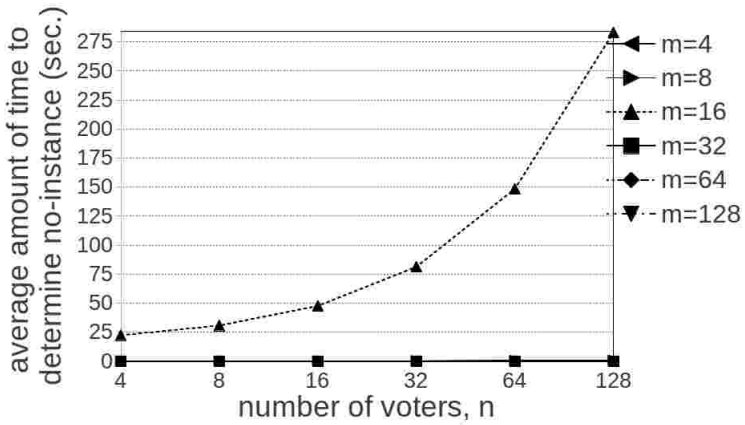


Figure 390: Average time the algorithm needs to determine no-instance of constructive control by deleting candidates in plurality elections in the IC model. The maximum is 283,07 seconds.

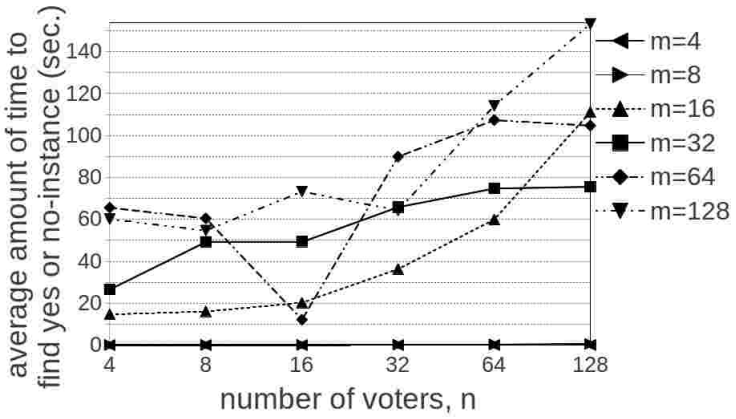


Figure 391: Average time the algorithm needs to give a definite output for constructive control by deleting candidates in plurality elections in the IC model. The maximum is $153,26$ seconds.

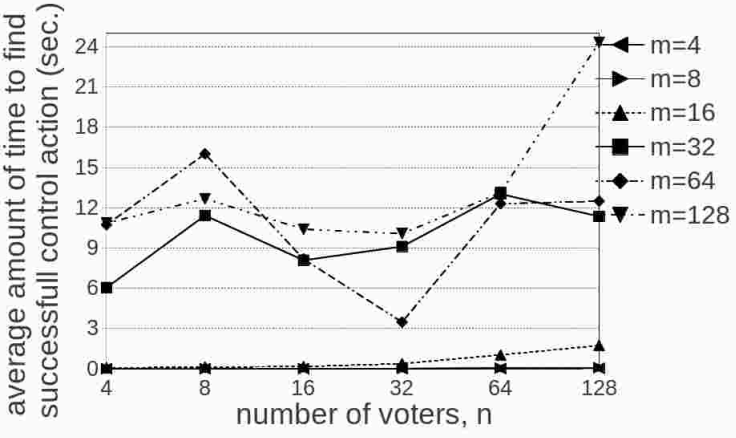


Figure 392: Average time the algorithm needs to find a successful control action for constructive control by deleting candidates in plurality elections in the TM model. The maximum is $24,32$ seconds.

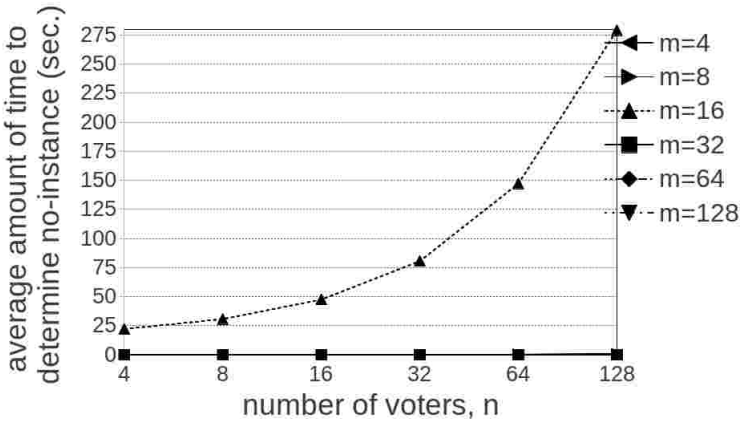


Figure 393: Average time the algorithm needs to determine no-instance of constructive control by deleting candidates in plurality elections in the TM model. The maximum is 279,1 seconds.

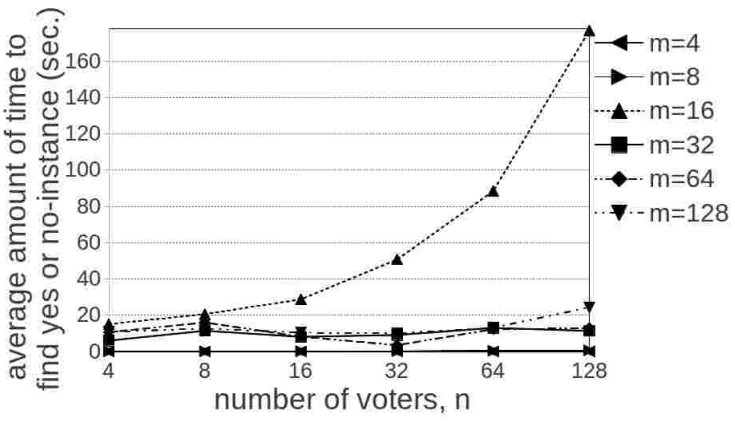


Figure 394: Average time the algorithm needs to give a definite output for constructive control by deleting candidates in plurality elections in the TM model. The maximum is 177,03 seconds.

C.4. Destructive Control by Deleting Candidates

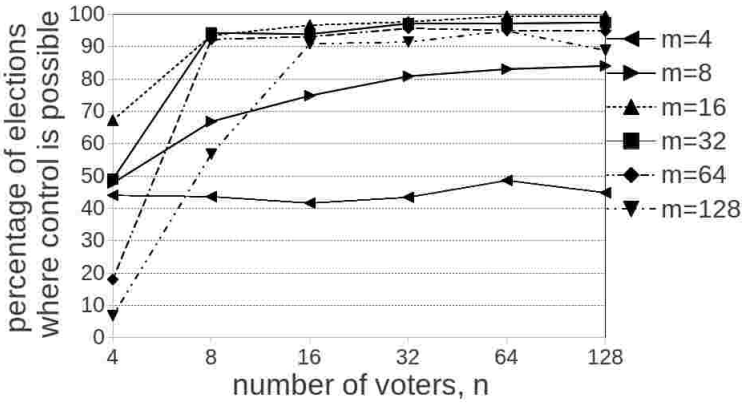


Figure 395: Results for plurality voting in the IC model for destructive control by deleting candidates. Number of candidates is fixed.

	$m=4$						$m=8$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	220	218	208	217	243	224	239	334	374	404	415	420
# ci	280	282	292	283	257	276	261	166	126	96	85	80
# to	0	0	0	0	0	0	0	0	0	0	0	0
	$m=16$						$m=32$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	336	467	483	488	497	497	245	471	469	485	485	487
# ci	164	33	17	12	3	3	11	0	0	0	0	0
# to	0	0	0	0	0	0	244	29	31	15	15	13
	$m=64$						$m=128$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	90	461	465	478	475	474	34	284	454	457	474	444
# ci	5	0	0	0	0	0	3	0	0	0	0	0
# to	405	39	35	22	25	26	463	216	46	43	26	56

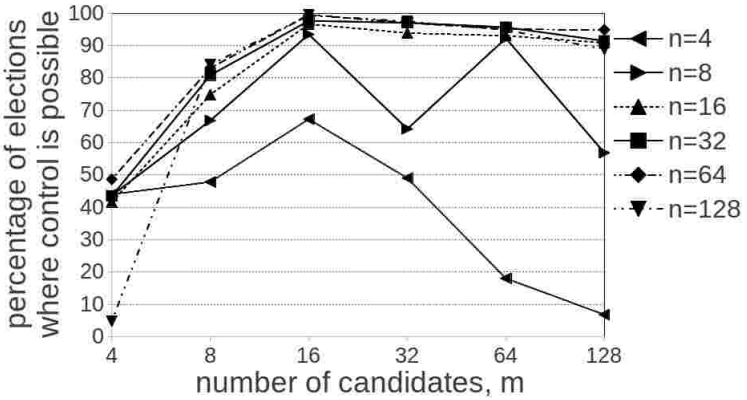


Figure 396: Results for plurality voting in the IC model for destructive control by deleting candidates. Number of voters is fixed.

	$n=4$						$n=8$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	220	239	336	245	90	34	218	334	467	471	461	284
# ci	280	261	164	11	5	3	282	166	33	0	0	0
# to	0	0	0	244	405	463	0	0	0	29	39	216
	$n=16$						$n=32$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	208	374	483	469	465	454	217	404	488	485	478	457
# ci	292	126	17	0	0	0	283	96	12	0	0	0
# to	0	0	0	31	35	46	0	0	0	15	22	43
	$n=64$						$n=128$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	243	415	497	485	475	474	224	420	497	487	474	444
# ci	257	85	3	0	0	0	276	80	3	0	0	0
# to	0	0	0	15	25	26	0	0	0	13	26	56

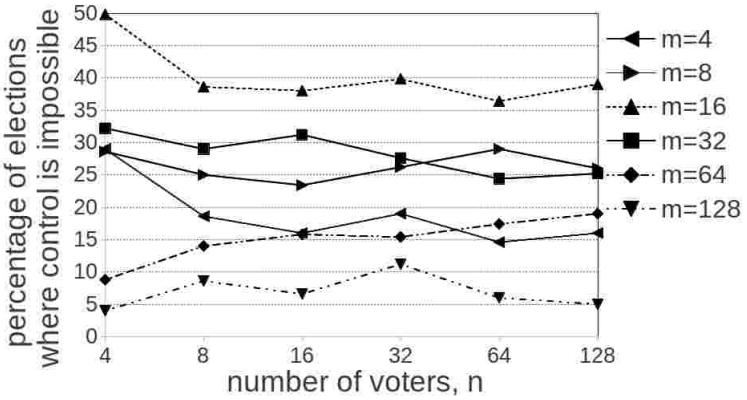


Figure 397: Results for plurality voting in the TM model for destructive control by deleting candidates. Number of candidates is fixed.

	$m=4$						$m=8$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	145	93	80	95	73	80	143	125	117	131	145	130
# ci	355	407	420	405	427	420	357	375	383	369	355	370
# to	0	0	0	0	0	0	0	0	0	0	0	0
	$m=16$						$m=32$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	249	193	190	199	182	195	161	145	156	138	122	126
# ci	251	307	310	301	318	305	192	141	66	41	19	17
# to	0	0	0	0	0	0	147	214	278	321	359	357
	$m=64$						$m=128$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	44	70	79	77	87	95	20	43	33	56	30	25
# ci	169	122	77	28	10	4	177	106	43	25	5	3
# to	287	308	344	395	403	401	303	351	424	419	465	472

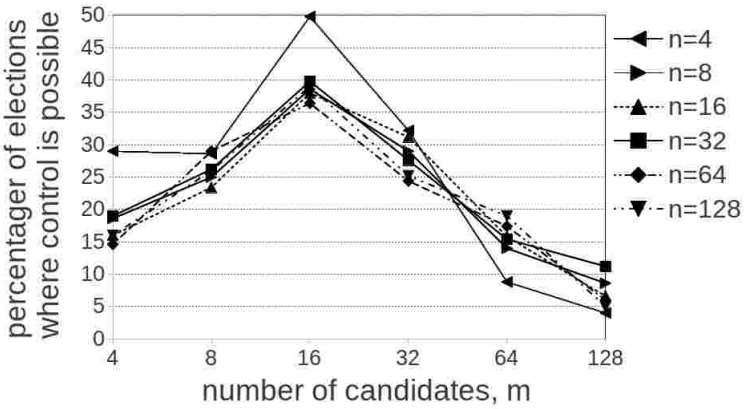


Figure 398: Results for plurality voting in the TM model for destructive control by deleting candidates. Number of voters is fixed.

	$n=4$						$n=8$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	145	143	249	161	44	20	93	125	193	145	70	43
# ci	355	357	251	192	169	177	407	375	307	141	122	106
# to	0	0	0	147	287	303	0	0	0	214	308	351
	$n=16$						$n=32$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	80	117	190	156	79	33	95	131	199	138	77	56
# ci	420	383	310	66	77	43	405	369	301	41	28	25
# to	0	0	0	278	344	424	0	0	0	321	395	419
	$n=64$						$n=128$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	73	145	182	122	87	30	80	130	195	126	95	25
# ci	427	355	318	19	10	5	420	370	305	17	4	3
# to	0	0	0	359	403	465	0	0	0	357	401	472

C.4.1. Computational Costs

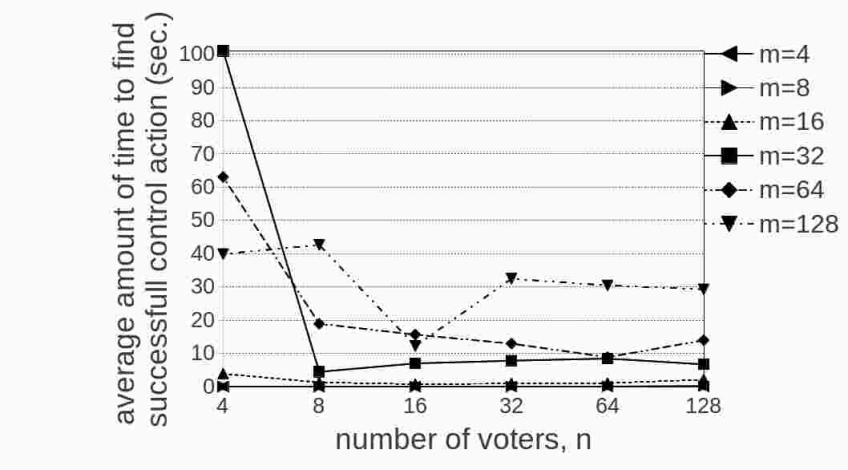


Figure 399: Average time the algorithm needs to find a successful control action for destructive control by deleting candidates in plurality elections in the IC model. The maximum is 100,99 seconds.

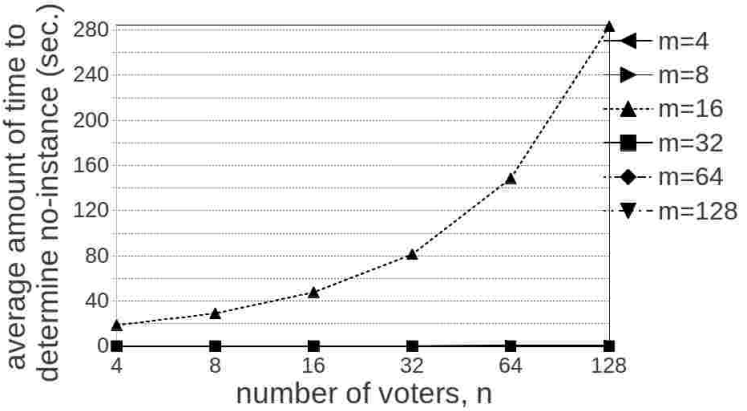


Figure 400: Average time the algorithm needs to determine no-instance of destructive control by deleting candidates in plurality elections in the IC model. The maximum is 283,09 seconds.

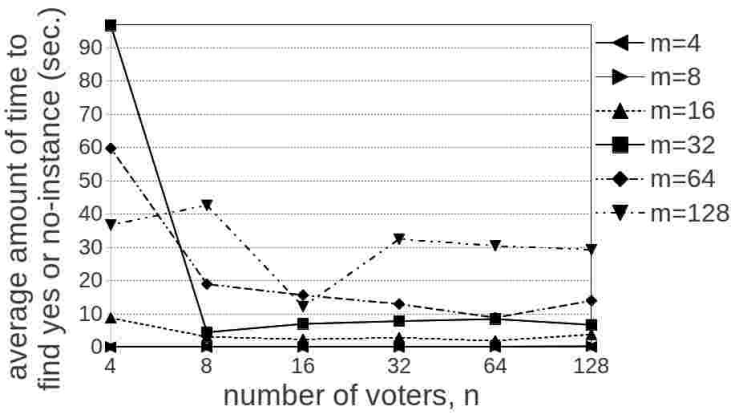


Figure 401: Average time the algorithm needs to give a definite output for destructive control by deleting candidates in plurality elections in the IC model. The maximum is 96,65 seconds.

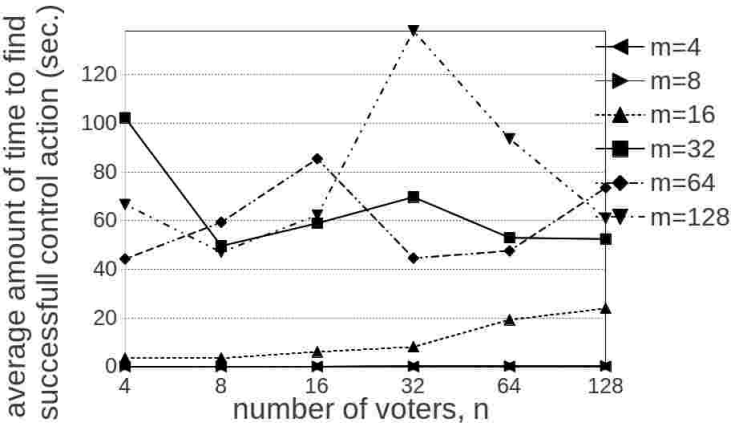


Figure 402: Average time the algorithm needs to find a successful control action for destructive control by deleting candidates in plurality elections in the TM model. The maximum is 137,95 seconds.

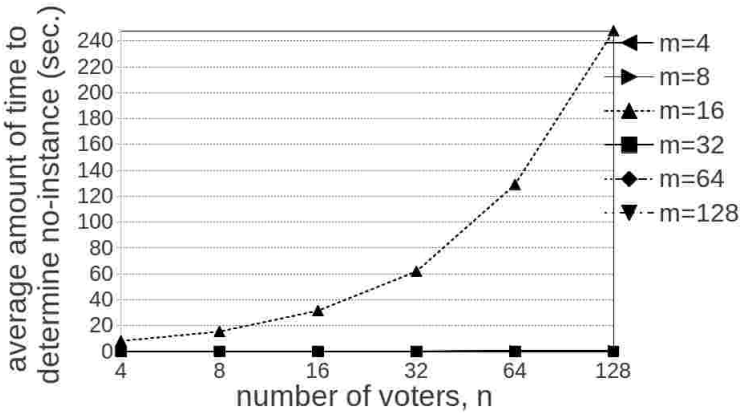


Figure 403: Average time the algorithm needs to determine no-instance of destructive control by deleting candidates in plurality elections in the TM model. The maximum is $247,8$ seconds.

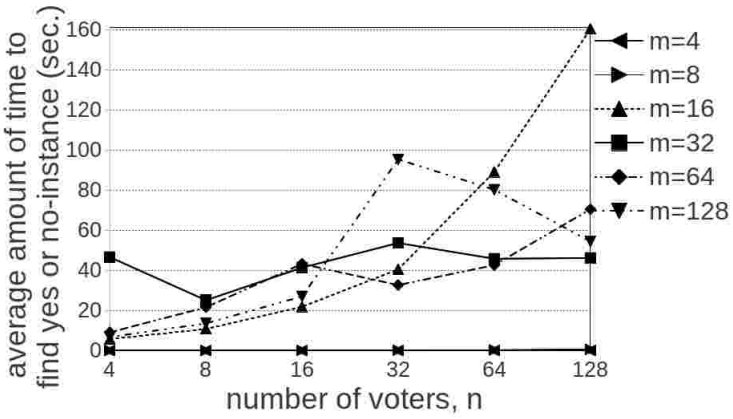


Figure 404: Average time the algorithm needs to give a definite output for destructive control by deleting candidates in plurality elections in the TM model. The maximum is $160,46$ seconds.

C.5. Constructive Control by Partition of Candidates in Model TE

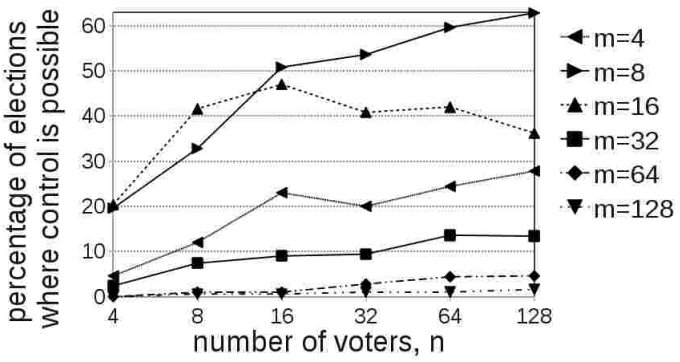


Figure 405: Results for plurality voting in the IC model for constructive control by partition of candidates in model TE. Number of voters is fixed.

	$m=4$						$m=8$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	23	60	115	100	122	139	98	164	254	268	298	314
# ci	477	440	385	400	378	361	402	336	246	232	202	186
# to	0	0	0	0	0	0	0	0	0	0	0	0
	$m=16$						$m=32$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	102	208	235	204	210	181	12	37	45	47	68	67
# ci	0	0	0	0	0	0	0	0	0	0	0	0
# to	398	292	265	296	290	319	488	463	455	453	432	433
	$m=64$						$m=128$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	0	5	5	14	22	23	0	3	3	5	5	8
# ci	0	0	0	0	0	0	0	0	0	0	0	0
# to	500	495	495	486	478	477	500	497	497	495	495	492

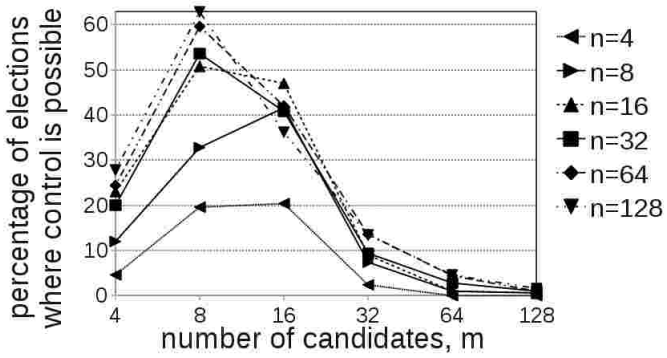


Figure 406: Results for plurality voting in the IC model for constructive control by partition of candidates in model TE. Number of voters is fixed.

	$n=4$						$n=8$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	23	98	102	12	0	0	60	164	208	37	5	3
# ci	477	402	0	0	0	0	440	336	0	0	0	0
# to	0	0	398	488	500	500	0	0	292	463	495	497
	$n=16$						$n=32$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	115	254	235	45	5	3	100	268	204	47	14	5
# ci	385	246	0	0	0	0	400	232	0	0	0	0
# to	0	0	265	455	495	497	0	0	296	453	486	495
	$n=64$						$n=128$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	122	298	210	68	22	5	139	314	181	67	23	8
# ci	378	202	0	0	0	0	361	186	0	0	0	0
# to	0	0	290	432	478	495	0	0	319	433	477	492

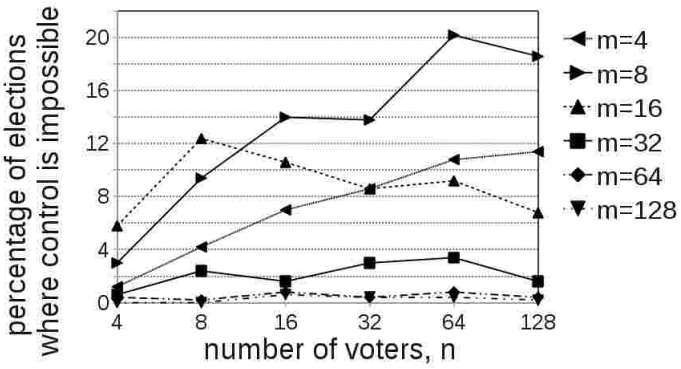


Figure 407: Results for plurality voting in the TM model for constructive control by partition of candidates in model TE. Number of candidates is fixed.

	$m=4$						$m=8$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	6	21	35	43	54	57	15	47	70	69	101	93
# ci	494	479	465	457	446	443	485	453	430	431	399	407
# to	0	0	0	0	0	0	0	0	0	0	0	0
	$m=16$						$m=32$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	29	62	53	43	46	34	3	12	8	15	17	8
# ci	0	0	0	0	0	0	0	0	0	0	0	0
# to	471	438	447	457	454	466	497	488	492	485	483	492
	$m=64$						$m=128$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	2	1	4	2	4	2	0	0	3	2	2	1
# ci	0	0	0	0	0	0	0	0	0	0	0	0
# to	498	499	496	498	496	498	500	500	497	498	498	499

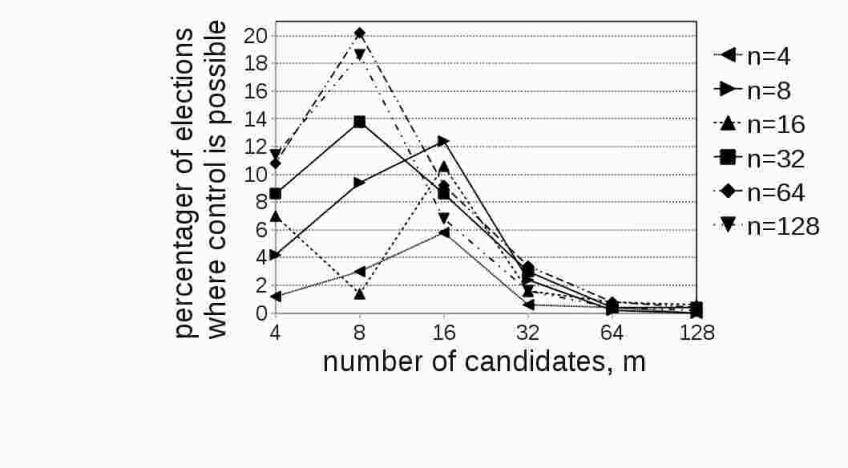


Figure 408: Results for plurality voting in the TM model for constructive control by partition of candidates in model TE. Number of voters is fixed.

	$n=4$						$n=8$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	6	15	29	3	2	0	21	47	62	12	1	0
# ci	494	485	0	0	0	0	479	453	0	0	0	0
# to	0	0	471	497	498	500	0	0	438	488	499	500
	$n=16$						$n=32$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	35	70	53	8	4	3	43	69	43	15	2	2
# ci	465	430	0	0	0	0	457	431	0	0	0	0
# to	0	0	447	492	496	497	0	0	457	485	498	498
	$n=64$						$n=128$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	54	101	46	17	4	2	57	93	34	8	2	1
# ci	446	399	0	0	0	0	443	407	0	0	0	0
# to	0	0	454	483	496	498	0	0	466	492	498	499

C.5.1. Computational Costs

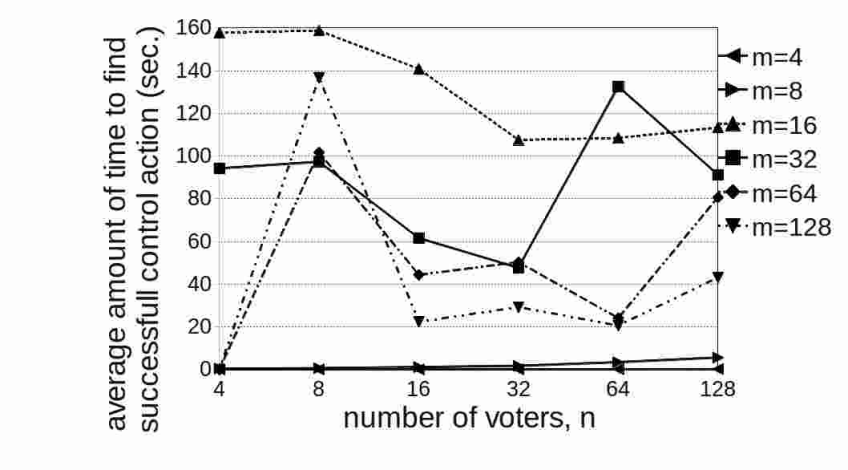


Figure 409: Average time the algorithm needs to find a successful control action for constructive control by partition of candidates in model TE in plurality elections in the IC model. The maximum is 158,73 seconds.

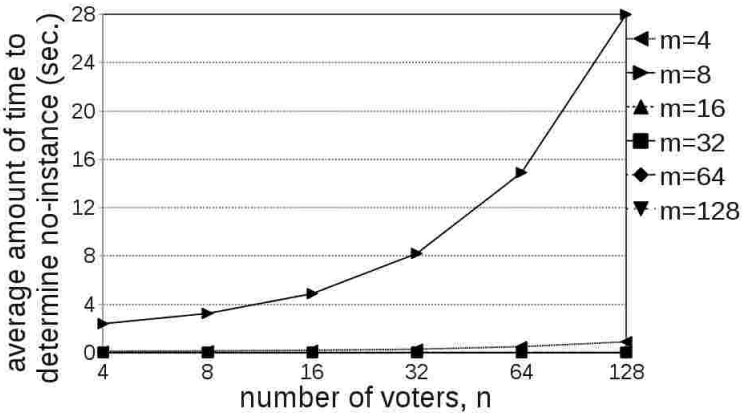


Figure 410: Average time the algorithm needs to determine no-instance of constructive control by partition of candidates in model TE in plurality elections in the IC model. The maximum is 27,99 seconds.

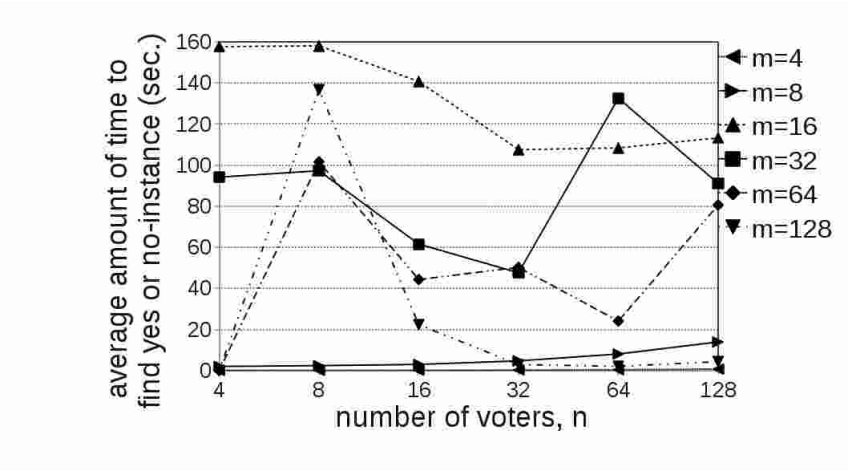


Figure 411: Average time the algorithm needs to give a definite output for constructive control by partition of candidates in model TE in plurality elections in the IC model. The maximum is 158, 11 seconds.

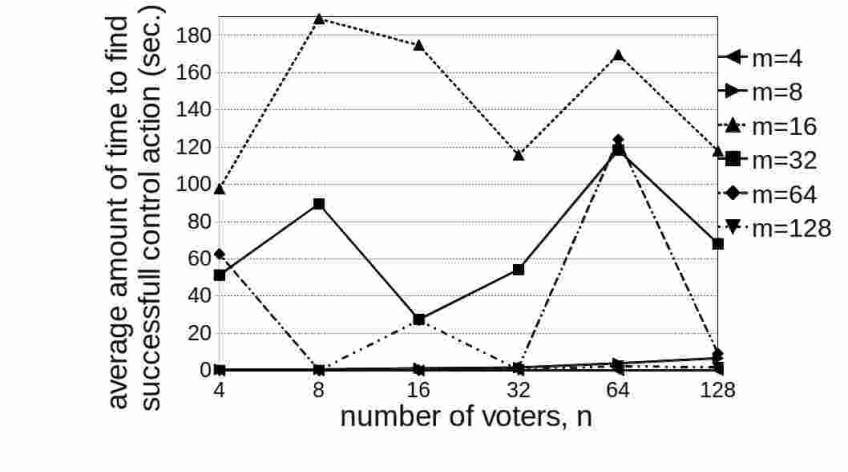


Figure 412: Average time the algorithm needs to find a successful control action for constructive control by partition of candidates in model TE in plurality elections in the TM model. The maximum is 188, 89 seconds.

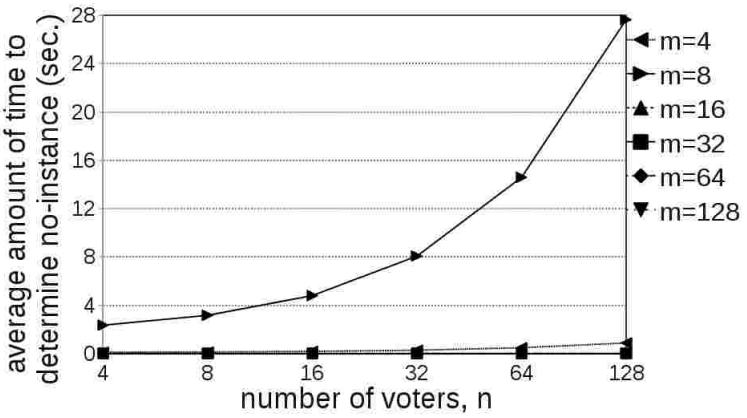


Figure 413: Average time the algorithm needs to determine no-instance of constructive control by partition of candidates in model TE in plurality elections in the TM model. The maximum is $27,64$ seconds.

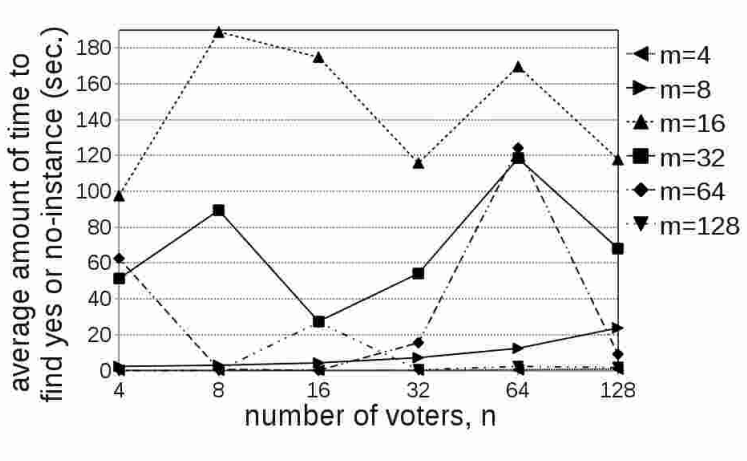


Figure 414: Average time the algorithm needs to give a definite output for constructive control by partition of candidates in model TE in plurality elections in the TM model. The maximum is $188,89$ seconds.

C.6. Destructive Control by Partition of Candidates in Model TE

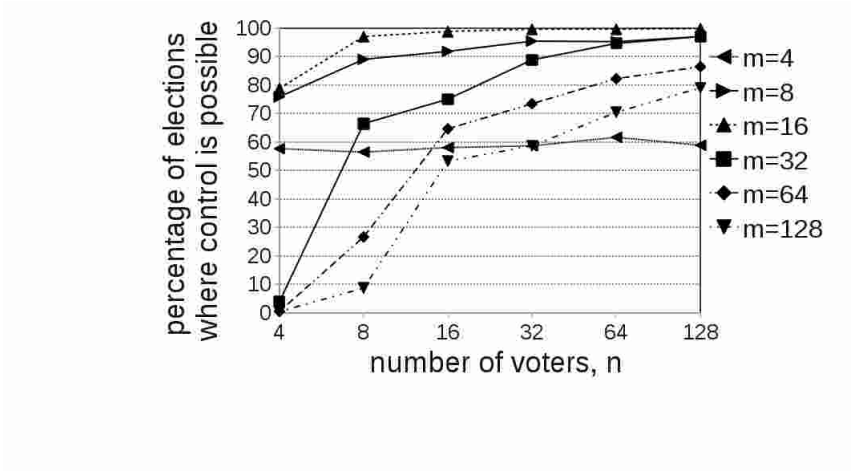


Figure 415: Results for plurality voting in the IC model for destructive control by partition of candidates in model TE. Number of candidates is fixed.

	$m=4$						$m=8$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	288	282	290	293	308	294	379	445	459	477	476	485
# ci	212	218	210	207	192	206	121	55	41	23	24	15
# to	0	0	0	0	0	0	0	0	0	0	0	0
	$m=16$						$m=32$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	394	485	494	498	498	499	19	332	375	444	473	485
# ci	0	0	0	0	0	0	11	0	0	0	0	0
# to	106	15	6	2	2	1	470	168	125	56	27	15
	$m=64$						$m=128$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	2	133	343	367	411	432	2	43	266	293	352	395
# ci	5	0	0	0	0	0	3	0	0	0	0	0
# to	493	367	157	133	89	68	495	457	234	207	148	105

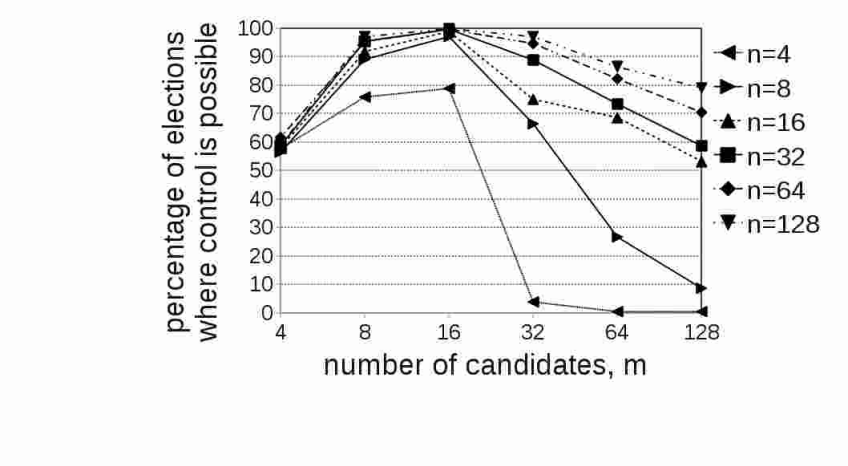


Figure 416: Results for plurality voting in the IC model for destructive control by partition of candidates in model TE. Number of voters is fixed.

	$n=4$						$n=8$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	288	379	394	19	2	2	282	445	485	332	133	43
# ci	212	121	0	11	5	3	218	55	0	0	0	0
# to	0	0	106	470	493	495	0	0	15	168	367	457
	$n=16$						$n=32$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	290	459	494	375	343	266	293	477	498	444	367	293
# ci	210	41	0	0	0	0	207	23	0	0	0	0
# to	0	0	6	125	157	234	0	0	2	56	133	207
	$n=64$						$n=128$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	308	476	498	473	411	352	294	485	499	485	432	395
# ci	192	24	0	0	0	0	206	15	0	0	0	0
# to	0	0	2	27	89	148	0	0	1	15	68	105

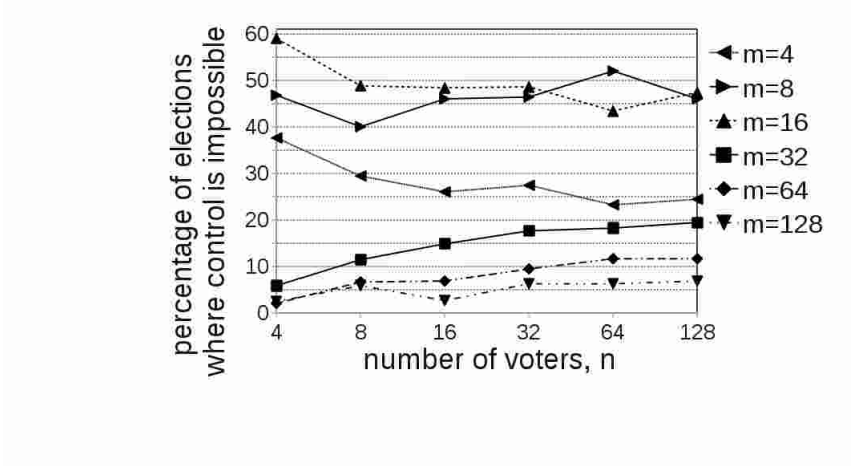


Figure 417: Results for plurality voting in the TM model for destructive control by partition of candidates in model TE. Number of candidates is fixed.

	$m=4$						$m=8$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	188	147	130	137	116	122	234	200	230	232	260	230
# ci	312	353	370	363	384	378	266	300	270	268	240	270
# to	0	0	0	0	0	0	0	0	0	0	0	0
	$m=16$						$m=32$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	295	244	242	243	217	237	29	57	74	88	91	97
# ci	161	154	105	70	39	36	192	141	66	41	19	17
# to	44	102	153	187	244	227	279	302	360	371	390	386
	$m=64$						$m=128$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	10	33	34	47	58	58	12	29	13	31	31	34
# ci	169	122	77	28	10	4	177	106	43	25	5	3
# to	321	345	389	425	432	438	311	365	444	444	464	463

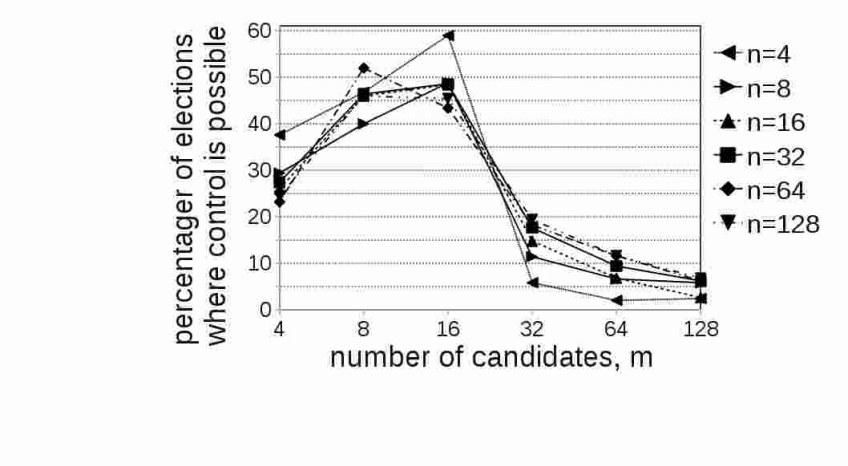


Figure 418: Results for plurality voting in the TM model for destructive control by partition of candidates in model TE. Number of voters is fixed.

	$n=4$						$n=8$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	188	234	295	29	10	12	147	200	244	57	33	29
# ci	312	266	161	192	169	177	353	300	154	141	122	106
# to	0	0	44	279	321	311	0	0	102	302	345	365
	$n=16$						$n=32$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	130	230	242	74	34	13	137	232	243	88	47	31
# ci	370	270	105	66	77	43	363	268	70	41	28	25
# to	0	0	153	360	389	444	0	0	187	371	425	444
	$n=64$						$n=128$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	116	260	217	91	58	0	122	230	237	97	58	34
# ci	384	240	39	19	10	0	378	270	36	17	4	3
# to	0	0	244	390	432	0	0	0	227	386	438	463

C.6.1. Computational Costs

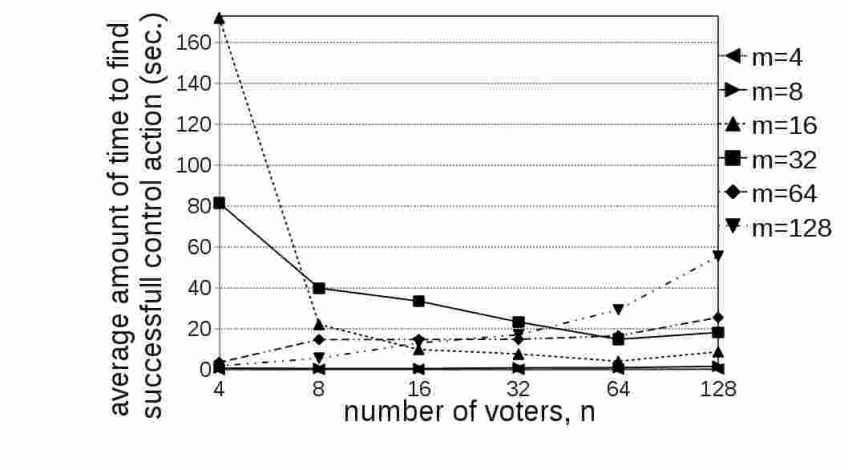


Figure 419: Average time the algorithm needs to find a successful control action for destructive control by partition of candidates in model TE in plurality elections in the IC model. The maximum is 172,19 seconds.

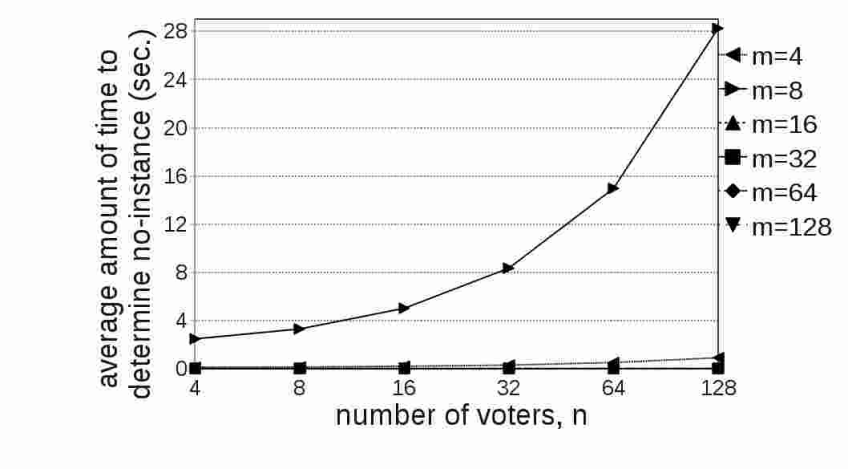


Figure 420: Average time the algorithm needs to determine no-instance of destructive control by partition of candidates in model TE in plurality elections in the IC model. The maximum is 28,26 seconds.

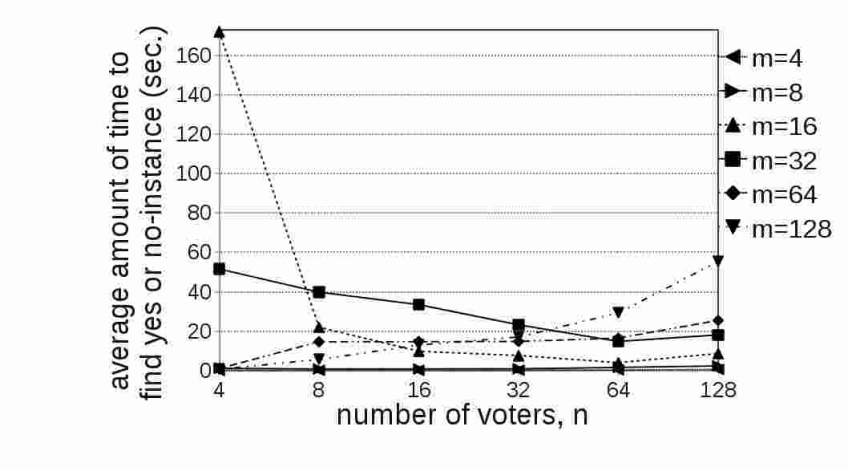


Figure 421: Average time the algorithm needs to give a definite output for destructive control by partition of candidates in model TE in plurality elections in the IC model. The maximum is 172,19 seconds.

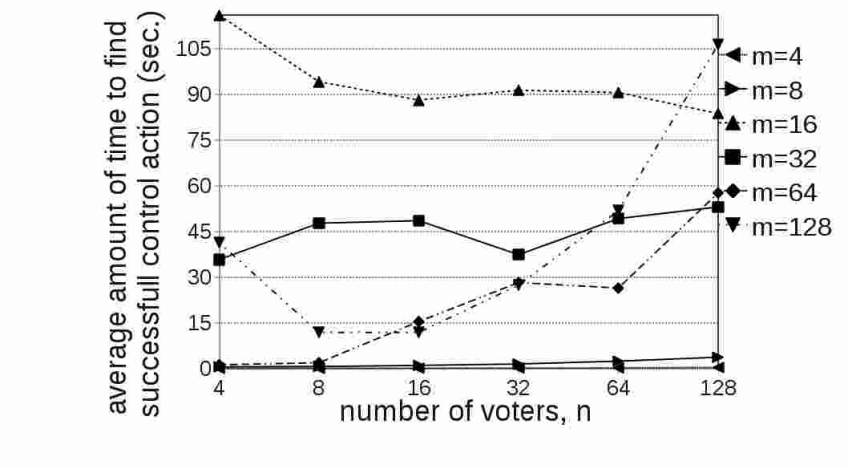


Figure 422: Average time the algorithm needs to find a successful control action for destructive control by partition of candidates in model TE in plurality elections in the TM model. The maximum is 115,89 seconds.

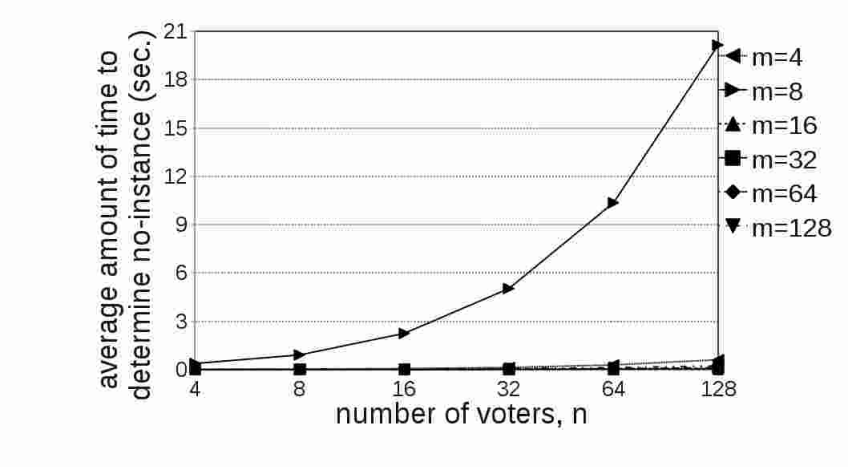


Figure 423: Average time the algorithm needs to determine no-instance of destructive control by partition of candidates in model TE in plurality elections in the TM model. The maximum is $20,15$ seconds.

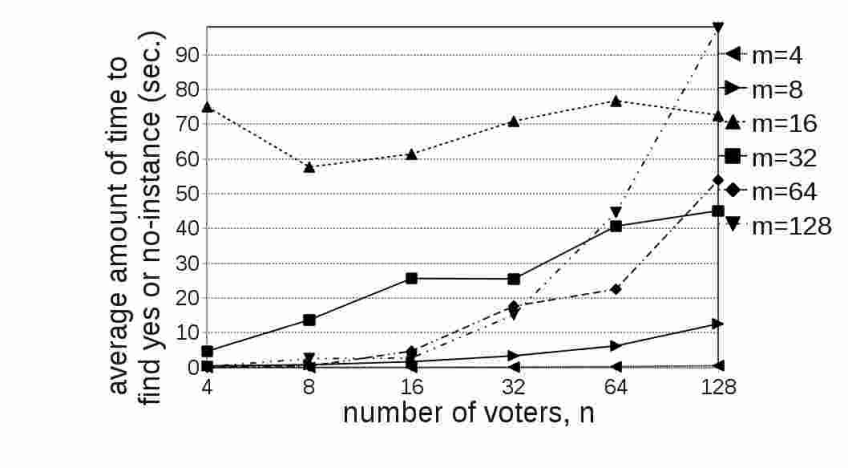


Figure 424: Average time the algorithm needs to give a definite output for destructive control by partition of candidates in model TE in plurality elections in the TM model. The maximum is $97,65$ seconds.

C.7. Constructive Control by Partition of Candidates in Model TP

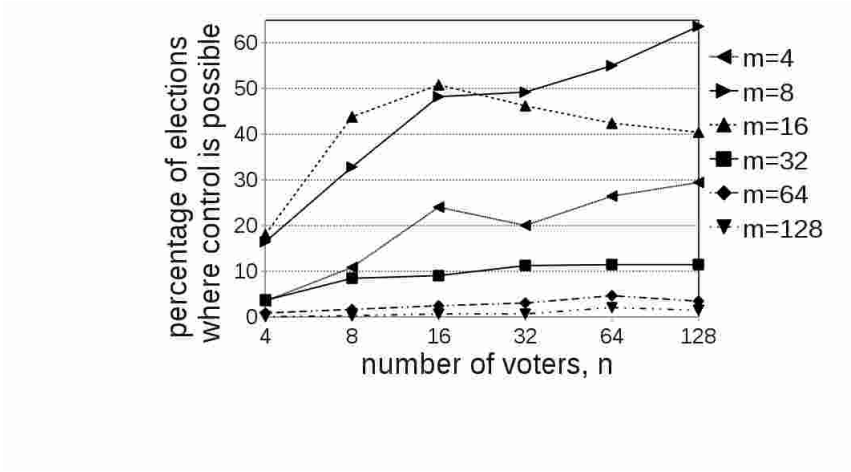


Figure 425: Results for plurality voting in the IC model for constructive control by partition of candidates in model TP. Number of candidates is fixed.

	$m=4$						$m=8$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	17	54	120	100	132	147	82	164	241	246	275	318
# ci	483	446	380	400	368	353	418	336	259	254	225	182
# to	0	0	0	0	0	0	0	0	0	0	0	0
	$m=16$						$m=32$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	90	219	254	231	212	202	18	42	45	56	57	57
# ci	0	0	0	0	0	0	0	0	0	0	0	0
# to	410	281	246	269	288	298	482	458	455	444	443	443
	$m=64$						$m=128$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	4	8	12	15	23	17	0	1	3	3	10	7
# ci	0	0	0	0	0	0	0	0	0	0	0	0
# to	496	492	488	485	477	483	500	499	497	497	490	493

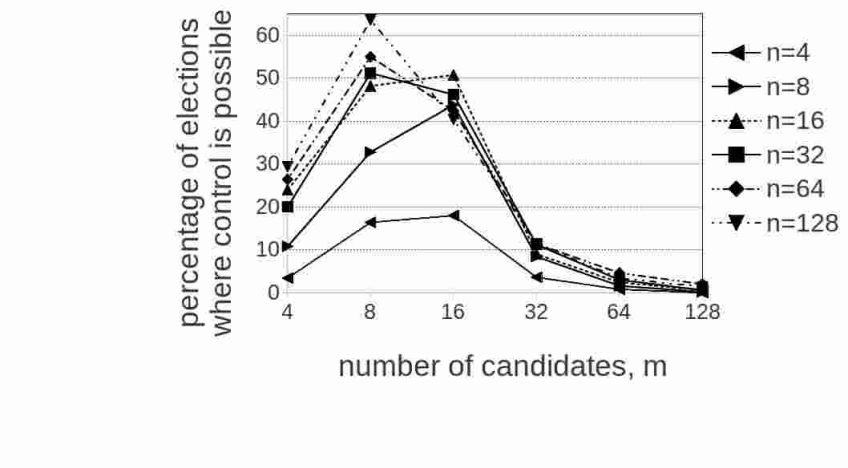


Figure 426: Results for plurality voting in the IC model for constructive control by partition of candidates in model TP. Number of voters is fixed.

	$n=4$						$n=8$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	17	82	90	18	4	0	54	164	219	42	8	1
# ci	483	418	0	0	0	0	446	336	0	0	0	0
# to	0	0	410	482	496	500	0	0	281	458	492	499
	$n=16$						$n=32$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	120	241	254	45	12	3	100	246	231	56	15	3
# ci	380	259	0	0	0	0	400	254	0	0	0	0
# to	0	0	246	455	488	497	0	0	269	444	485	497
	$n=64$						$n=128$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	132	275	212	57	23	10	147	318	202	57	17	7
# ci	368	225	0	0	0	0	353	182	0	0	0	0
# to	0	0	288	443	477	490	0	0	298	443	483	493

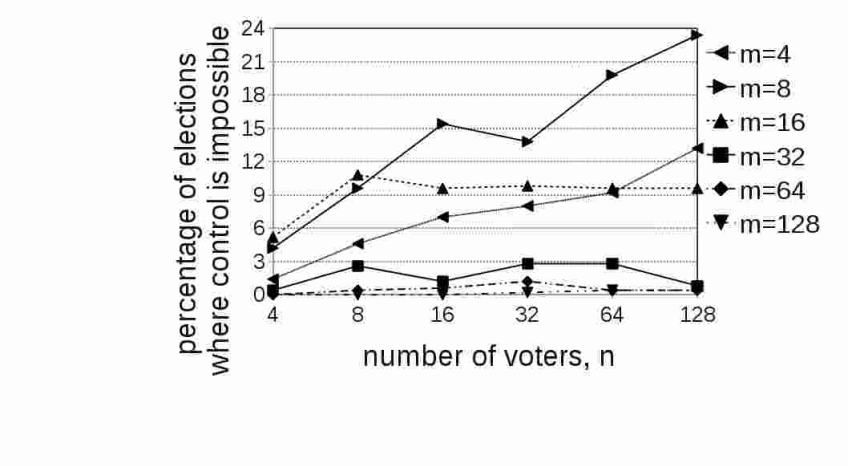


Figure 427: Results for plurality voting in the TM model for constructive control by partition of candidates in model TP. Number of candidates is fixed.

	$m=4$						$m=8$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	7	23	35	35	46	66	21	48	77	69	99	117
# ci	493	477	465	465	454	434	479	452	423	431	401	383
# to	0	0	0	0	0	0	0	0	0	0	0	0
	$m=16$						$m=32$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	26	54	48	49	48	48	2	13	6	14	14	4
# ci	0	0	0	0	0	0	0	0	0	0	0	0
# to	474	446	452	451	452	452	498	487	494	486	486	496
	$m=64$						$m=128$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	0	2	3	6	2	2	0	0	0	1	2	2
# ci	0	0	0	0	0	0	0	0	0	0	0	0
# to	500	498	497	494	498	498	500	500	500	499	498	498

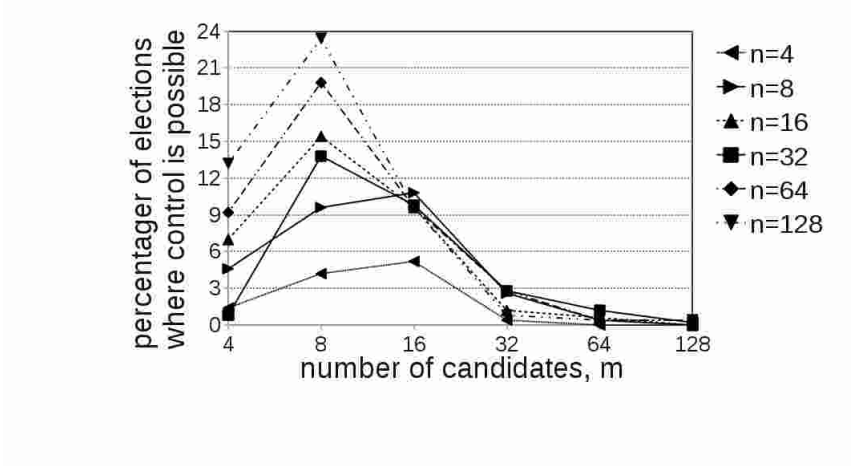


Figure 428: Results for plurality voting in the TM model for constructive control by partition of candidates in model TP. Number of voters is fixed.

	$n=4$						$n=8$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	7	21	26	2	0	0	23	48	54	13	2	0
# ci	493	479	0	0	0	0	477	452	0	0	0	0
# to	0	0	474	498	500	500	0	0	446	487	498	500
	$n=16$						$n=32$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	35	77	48	6	3	0	40	69	49	14	6	1
# ci	465	423	0	0	0	0	460	431	0	0	0	0
# to	0	0	452	494	497	500	0	0	451	486	494	499
	$n=64$						$n=128$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	46	99	48	14	2	2	66	117	48	4	2	2
# ci	454	401	0	0	0	0	434	383	0	0	0	0
# to	0	0	452	486	498	498	0	0	452	496	498	498

C.7.1. Computational Costs

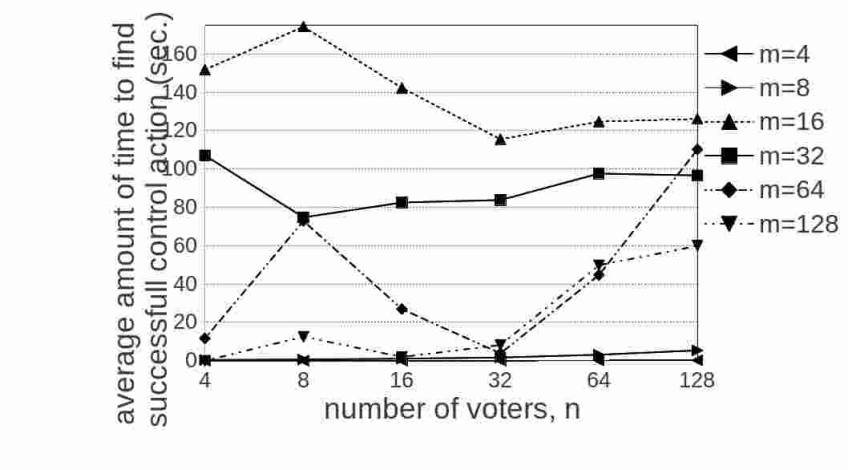


Figure 429: Average time the algorithm needs to find a successful control action for constructive control by partition of candidates in model TP in plurality elections in the IC model. The maximum is 174, 14 seconds.

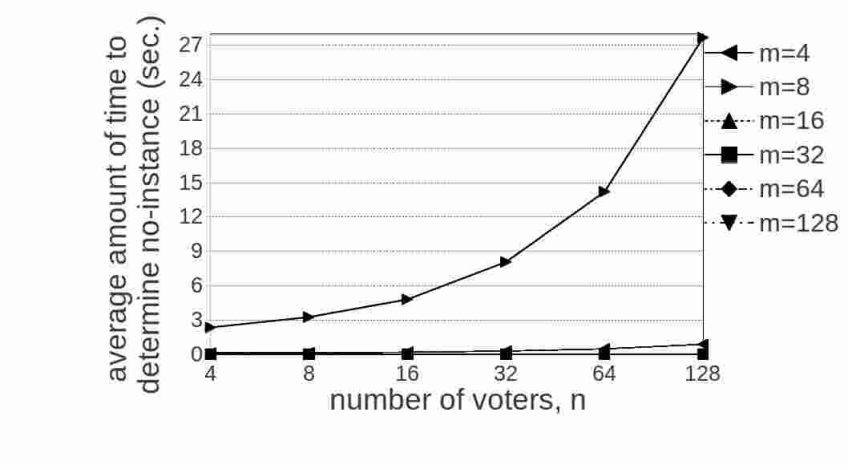


Figure 430: Average time the algorithm needs to determine no-instance of constructive control by partition of candidates in model TP in plurality elections in the IC model. The maximum is 27, 68 seconds.

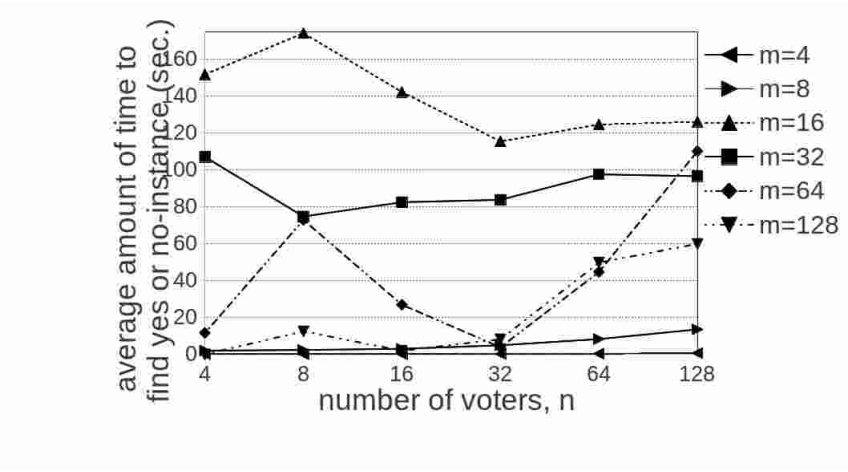


Figure 431: Average time the algorithm needs to give a definite output for constructive control by partition of candidates in model TP in plurality elections in the IC model. The maximum is 174, 14 seconds.

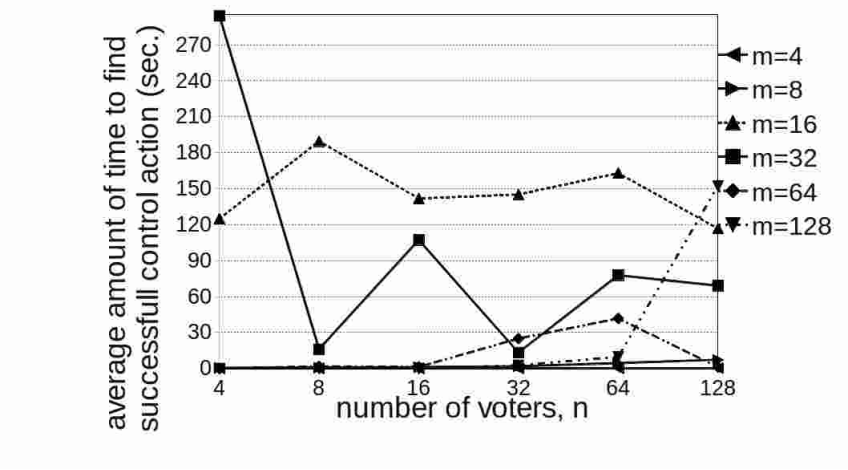


Figure 432: Average time the algorithm needs to find a successful control action for constructive control by partition of candidates in model TP in plurality elections in the TM model. The maximum is 294, 18 seconds.

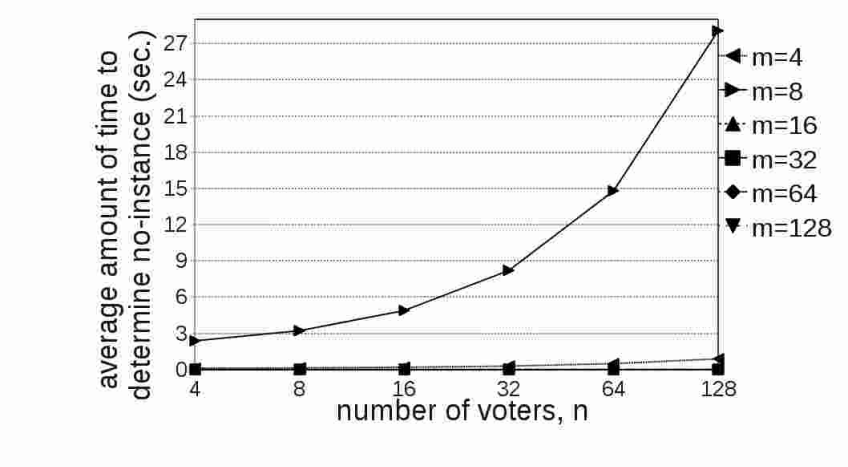


Figure 433: Average time the algorithm needs to determine no-instance of constructive control by partition of candidates in model TP in plurality elections in the TM model. The maximum is 28,05 seconds.

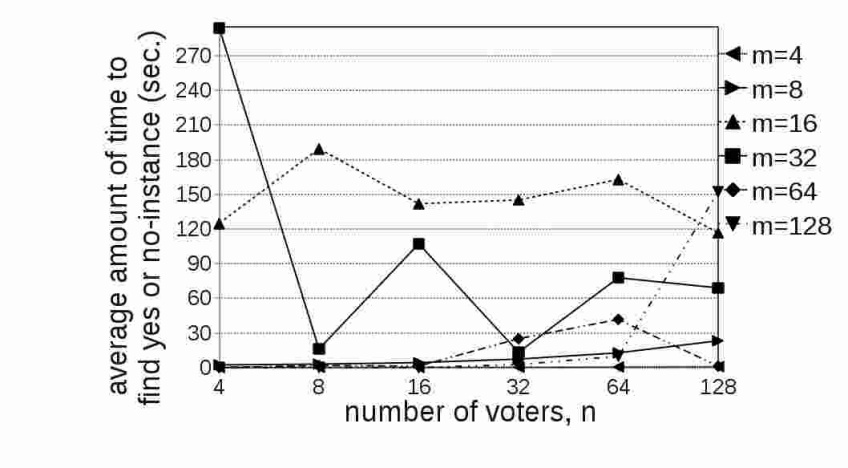


Figure 434: Average time the algorithm needs to give a definite output for constructive control by partition of candidates in model TP in plurality elections in the TM model. The maximum is 294,18 seconds.

C.8. Destructive Control by Partition of Candidates in Model TP

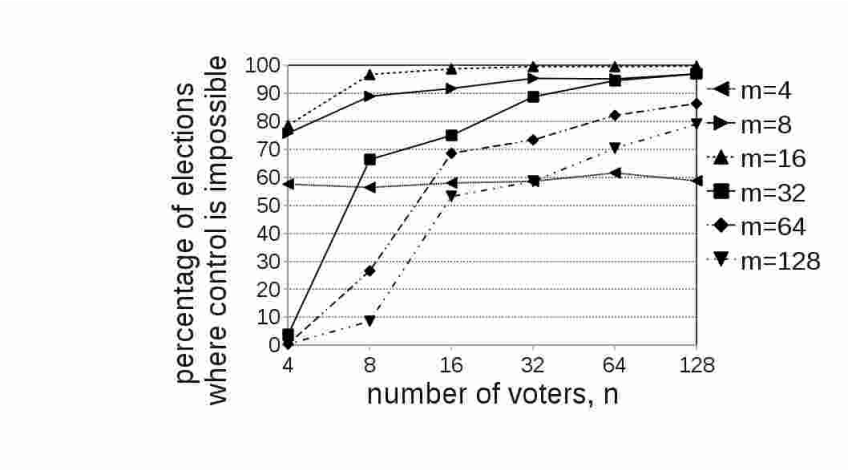


Figure 435: Results for plurality voting in the IC model for destructive control by partition of candidates in model TP. Number of candidates is fixed.

	$m=4$						$m=8$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	288	282	290	293	308	294	379	445	459	477	476	485
# ci	212	218	210	207	192	206	121	55	41	23	24	15
# to	0	0	0	0	0	0	0	0	0	0	0	0
	$m=16$						$m=32$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	393	484	494	498	498	499	19	332	375	444	473	485
# ci	28	2	0	0	0	0	11	0	0	0	0	0
# to	79	14	6	2	2	1	470	168	125	56	27	15
	$m=64$						$m=128$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	2	133	343	367	411	432	2	43	266	293	352	395
# ci	5	0	0	0	0	0	3	0	0	0	0	0
# to	493	367	157	133	89	68	495	457	234	207	148	105

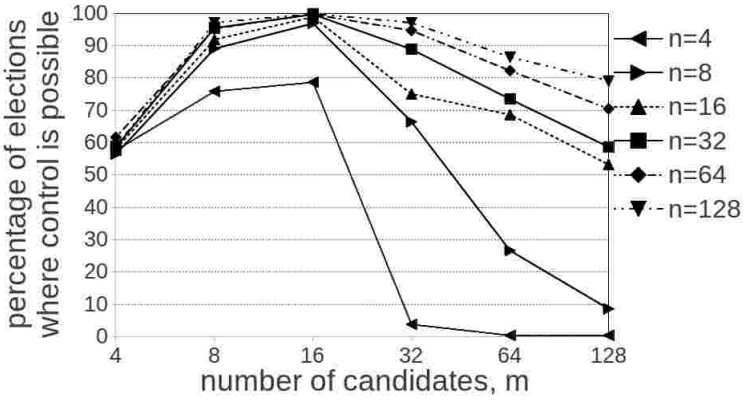


Figure 436: Results for plurality voting in the IC model for destructive control by partition of candidates in model TP. Number of voters is fixed.

	$n=4$						$n=8$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	288	379	393	19	2	2	282	445	484	332	133	43
# ci	212	121	28	11	5	3	218	55	2	0	0	0
# to	0	0	79	470	493	495	0	0	14	168	367	457
	$n=16$						$n=32$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	290	459	494	375	343	266	293	477	498	444	367	293
# ci	210	41	0	0	0	0	207	23	0	0	0	0
# to	0	0	6	125	157	234	0	0	2	56	133	207
	$n=64$						$n=128$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	308	476	498	473	411	352	294	485	499	485	432	395
# ci	192	24	0	0	0	0	206	15	0	0	0	0
# to	0	0	2	27	89	148	0	0	1	15	68	105

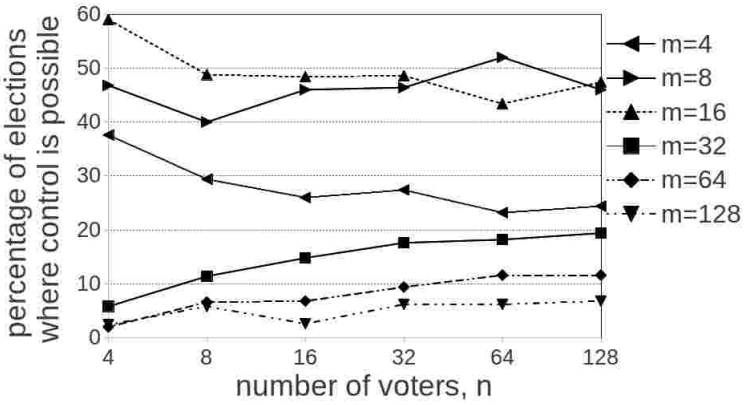


Figure 437: Results for plurality voting in the TM model for destructive control by partition of candidates in model TP. Number of candidates is fixed.

	$m=4$						$m=8$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	188	147	130	137	116	122	234	200	230	232	260	230
# ci	312	353	370	363	384	378	266	300	270	268	240	270
# to	0	0	0	0	0	0	0	0	0	0	0	0
	$m=16$						$m=32$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	295	244	242	243	217	237	29	57	74	88	91	97
# ci	161	154	105	70	39	36	192	141	66	41	19	17
# to	44	102	153	187	244	227	279	302	360	371	390	386
	$m=64$						$m=128$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	10	33	34	47	58	58	12	29	13	31	31	34
# ci	169	122	77	28	10	4	177	106	43	25	5	3
# to	321	345	389	425	432	438	311	365	444	464	464	463

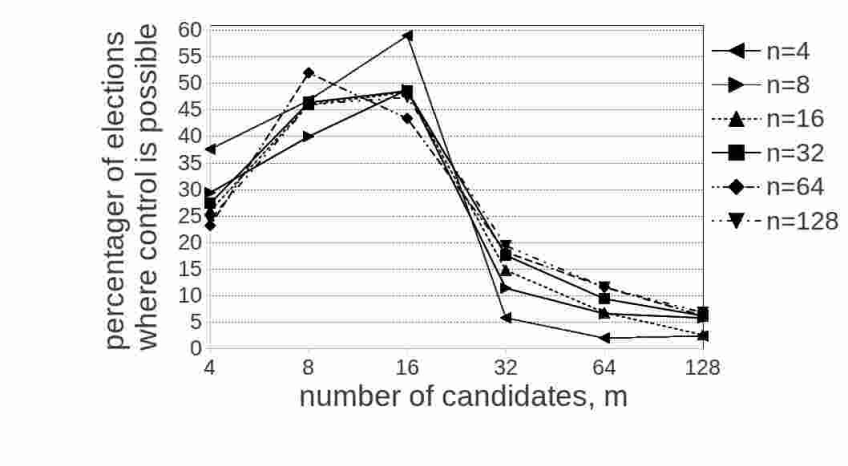


Figure 438: Results for plurality voting in the TM model for destructive control by partition of candidates in model TP. Number of voters is fixed.

	$n=4$						$n=8$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	188	234	295	29	10	12	147	200	244	57	33	29
# ci	312	266	161	192	169	177	353	300	154	141	122	106
# to	0	0	44	279	321	311	0	0	102	302	345	365
	$n=16$						$n=32$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	130	230	242	74	34	13	137	232	243	88	47	31
# ci	370	270	105	66	77	43	363	268	70	41	28	25
# to	0	0	153	360	389	444	0	0	187	371	425	444
	$n=64$						$n=128$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	116	260	217	91	58	31	122	230	237	97	58	34
# ci	384	240	39	19	10	5	378	270	36	17	4	3
# to	0	0	244	390	432	464	0	0	227	386	438	463

C.8.1. Computational Costs

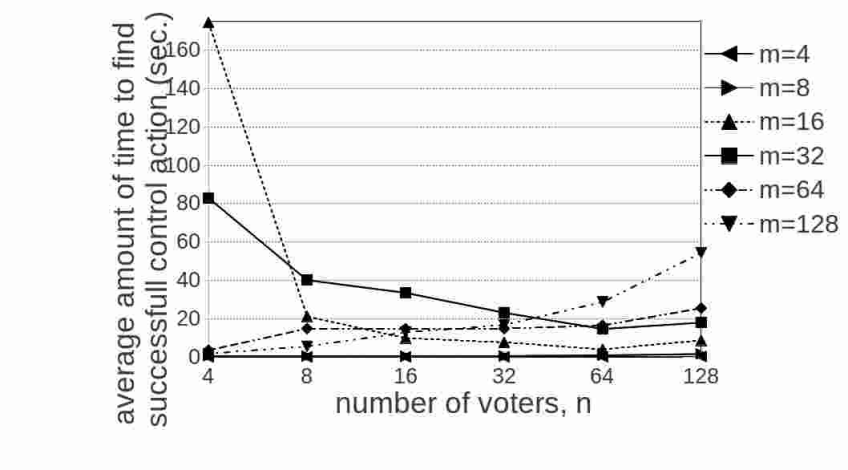


Figure 439: Average time the algorithm needs to find a successful control action for destructive control by partition of candidates in model TP in plurality elections in the IC model. The maximum is 174,36 seconds.

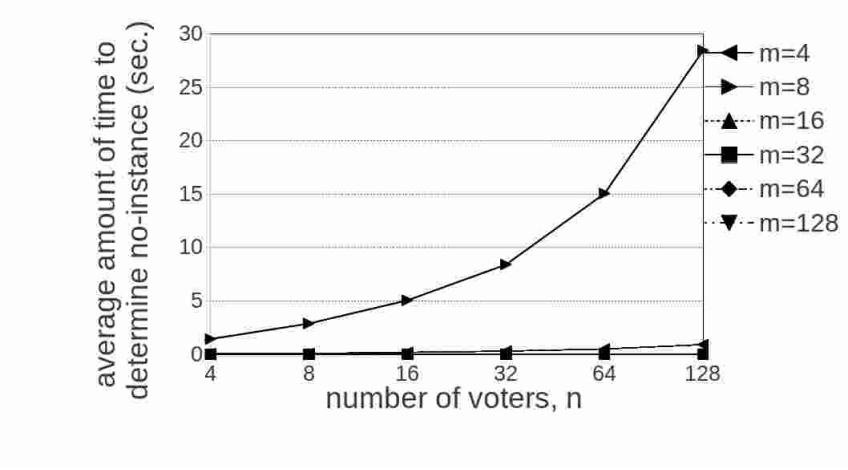


Figure 440: Average time the algorithm needs to determine no-instance of destructive control by partition of candidates in model TP in plurality elections in the IC model. The maximum is 28,46 seconds.

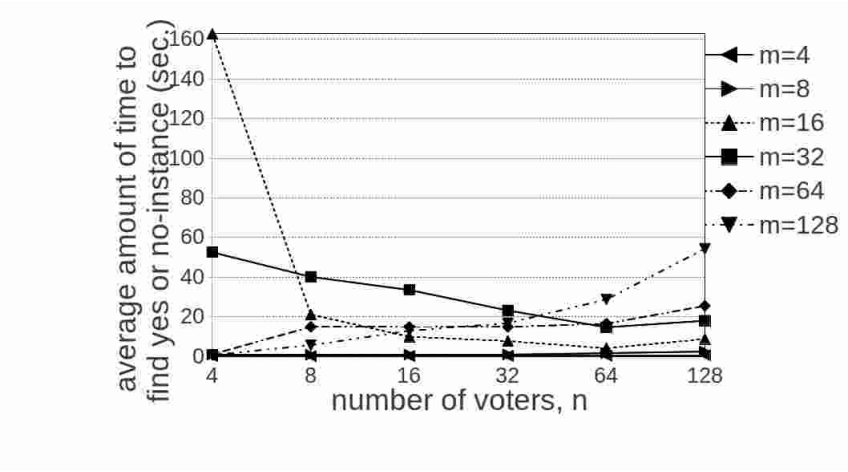


Figure 441: Average time the algorithm needs to give a definite output for destructive control by partition of candidates in model TP in plurality elections in the IC model. The maximum is 162,76 seconds.

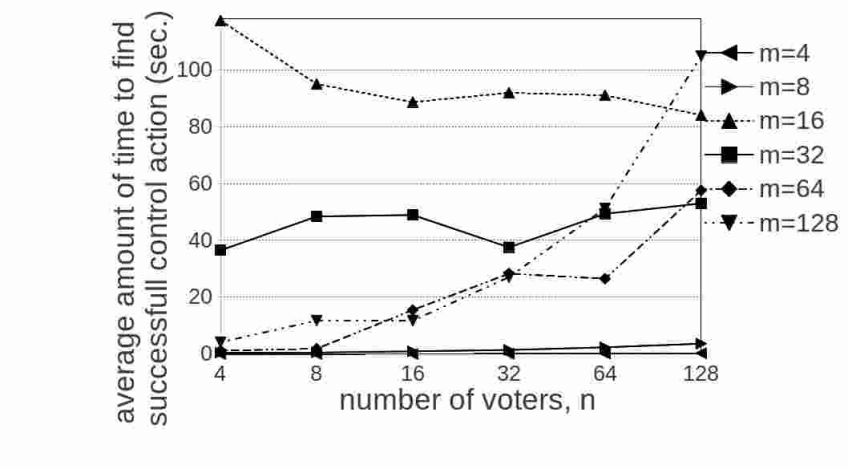


Figure 442: Average time the algorithm needs to find a successful control action for destructive control by partition of candidates in model TP in plurality elections in the TM model. The maximum is 117,3 seconds.

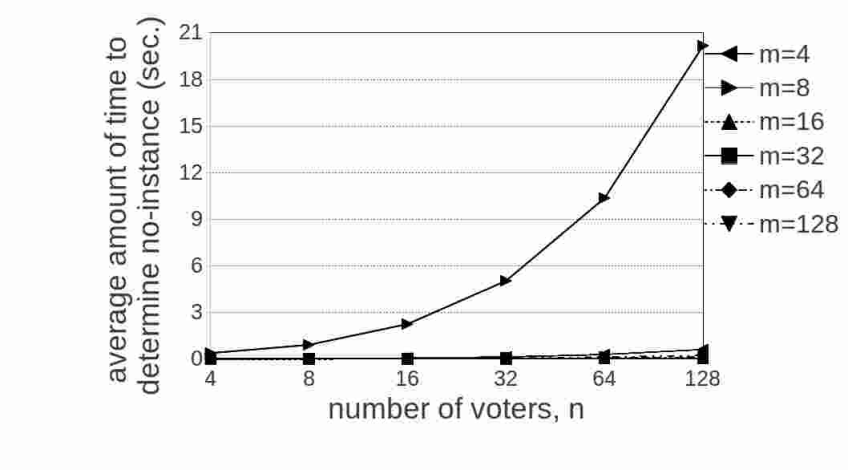


Figure 443: Average time the algorithm needs to determine no-instance of destructive control by partition of candidates in model TP in plurality elections in the TM model. The maximum is $20,17$ seconds.

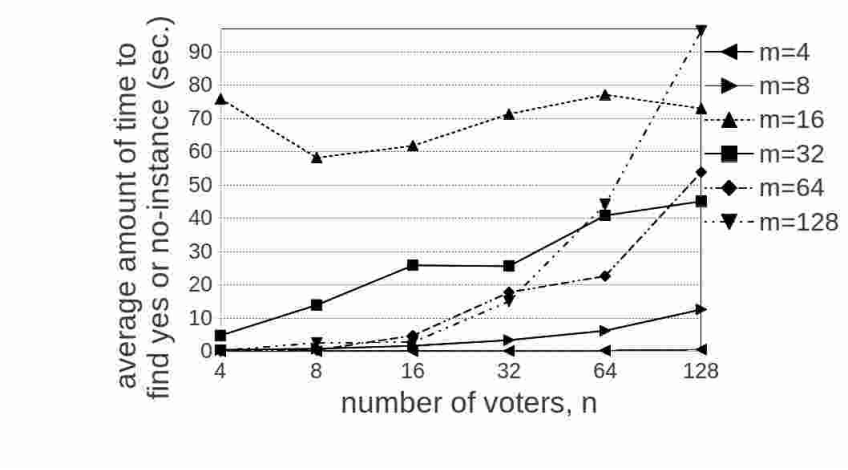


Figure 444: Average time the algorithm needs to give a definite output for destructive control by partition of candidates in model TP in plurality elections in the TM model. The maximum is $96,35$ seconds.

C.9. Constructive Control by Runoff Partition of Candidates in Model TE

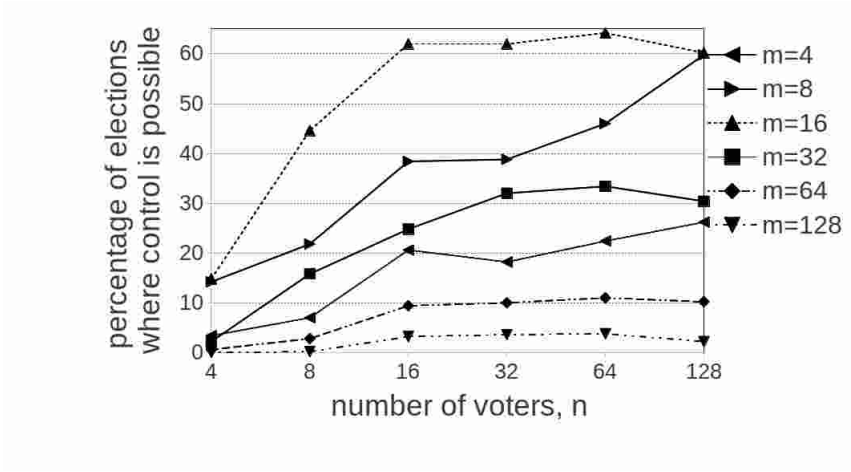


Figure 445: Results for plurality voting in the IC model for constructive control by runoff-partition of candidates in model TE. Number of candidates is fixed.

	$m=4$						$m=8$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	17	35	103	91	112	131	71	109	192	194	230	249
# ci	483	465	397	409	388	369	429	391	308	306	270	251
# to	0	0	0	0	0	0	0	0	0	0	0	0
	$m=16$						$m=32$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	74	223	310	310	321	301	11	79	124	160	167	152
# ci	426	0	0	0	0	0	0	0	0	0	0	0
# to	0	277	190	190	179	199	489	421	376	340	333	348
	$m=64$						$m=128$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	3	14	47	50	55	51	0	1	16	18	19	11
# ci	0	0	0	0	0	0	0	0	0	0	0	0
# to	497	486	453	450	445	449	500	499	484	482	481	489

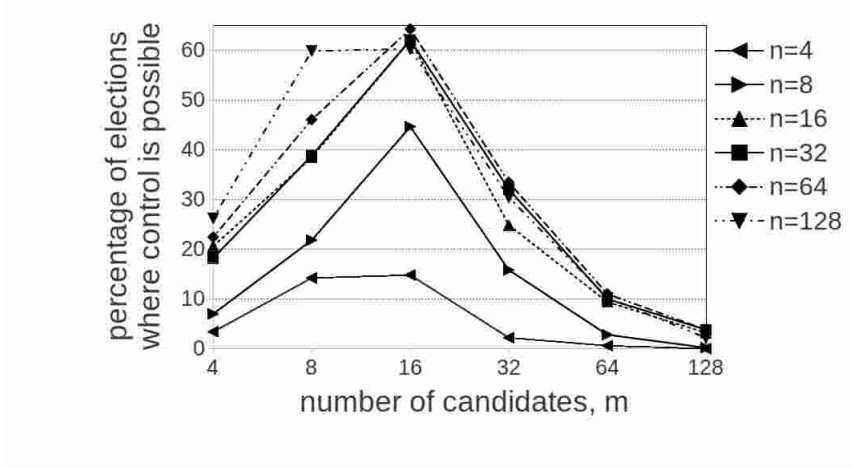


Figure 446: Results for plurality voting in the IC model for constructive control by runoff-partition of candidates in model TE. Number of voters is fixed.

	$n=4$						$n=8$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	17	71	74	11	3	0	35	109	223	79	14	1
# ci	483	429	426	0	0	0	465	391	0	0	0	0
# to	0	0	0	489	497	500	0	0	277	421	486	499
	$n=16$						$n=32$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	103	192	310	124	47	16	91	194	310	160	50	18
# ci	397	308	0	0	0	0	409	306	0	0	0	0
# to	0	0	190	376	453	484	0	0	190	340	450	482
	$n=64$						$n=128$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	112	230	321	167	55	19	131	249	301	152	51	11
# ci	388	270	0	0	0	0	369	251	0	0	0	0
# to	0	0	179	333	445	481	0	0	199	348	449	489

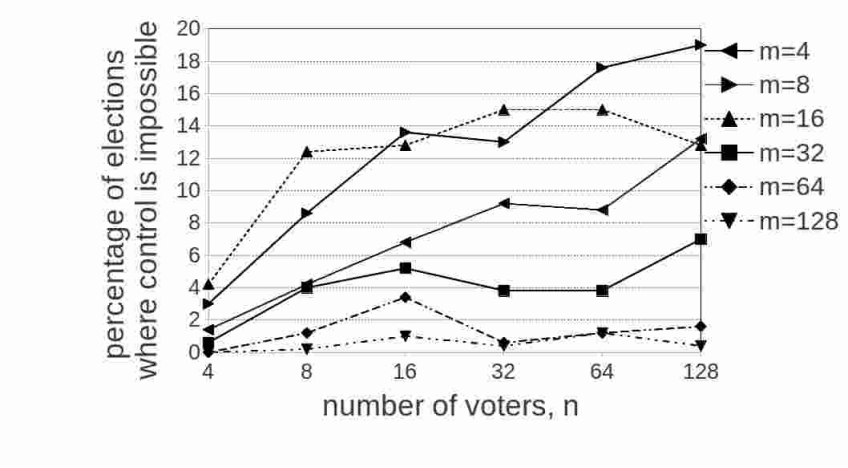


Figure 447: Results for plurality voting in the TM model for constructive control by runoff-partition of candidates in model TE. Number of candidates is fixed.

	$m=4$						$m=8$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	7	21	34	46	44	66	15	43	68	65	88	95
# ci	493	479	466	454	456	434	485	457	432	435	412	405
# to	0	0	0	0	0	0	0	0	0	0	0	0
	$m=16$						$m=32$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	21	62	64	75	75	64	3	20	26	19	19	35
# ci	88	0	0	0	0	0	0	0	0	0	0	0
# to	391	438	436	425	425	436	497	480	474	481	481	465
	$m=64$						$m=128$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	0	6	17	3	6	8	0	1	5	2	6	2
# ci	0	0	0	0	0	0	0	0	0	0	0	0
# to	500	494	483	497	494	492	500	499	495	498	494	498

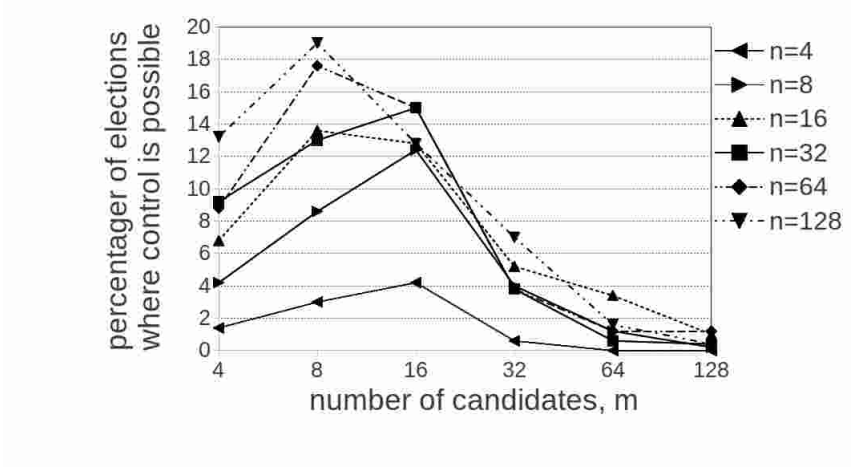


Figure 448: Results for plurality voting in the TM model for constructive control by runoff-partition of candidates in model TE. Number of voters is fixed.

	$n=4$						$n=8$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	7	15	21	3	0	0	21	43	62	20	6	1
# ci	493	485	88	0	0	0	479	457	0	0	0	0
# to	0	0	391	497	500	500	0	0	438	480	494	499
	$n=16$						$n=32$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	34	68	64	26	17	5	46	65	75	19	3	2
# ci	466	432	0	0	0	0	454	435	0	0	0	0
# to	0	0	436	474	483	495	0	0	425	481	497	498
	$n=64$						$n=128$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	44	88	75	19	6	6	66	95	64	35	8	2
# ci	456	412	0	0	0	0	434	405	0	0	0	0
# to	0	0	425	481	494	494	0	0	436	465	492	498

C.9.1. Computational Costs

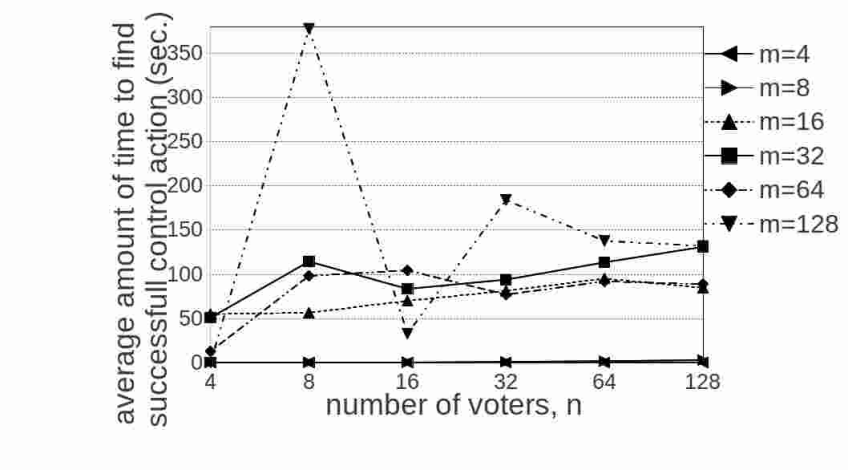


Figure 449: Average time the algorithm needs to find a successful control action for constructive control by runoff-partition of candidates in model TE in plurality elections in the IC model. The maximum is 378,02 seconds.

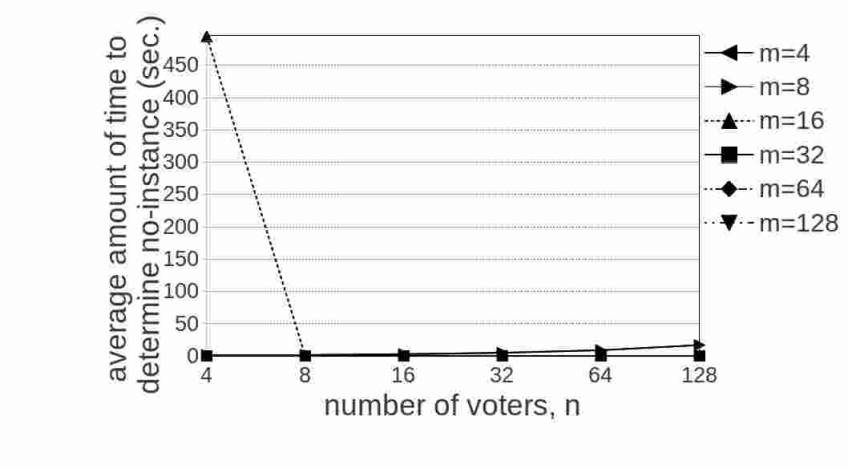


Figure 450: Average time the algorithm needs to determine no-instance of constructive control by runoff-partition of candidates in model TE in plurality elections in the IC model. The maximum is 495,26 seconds.

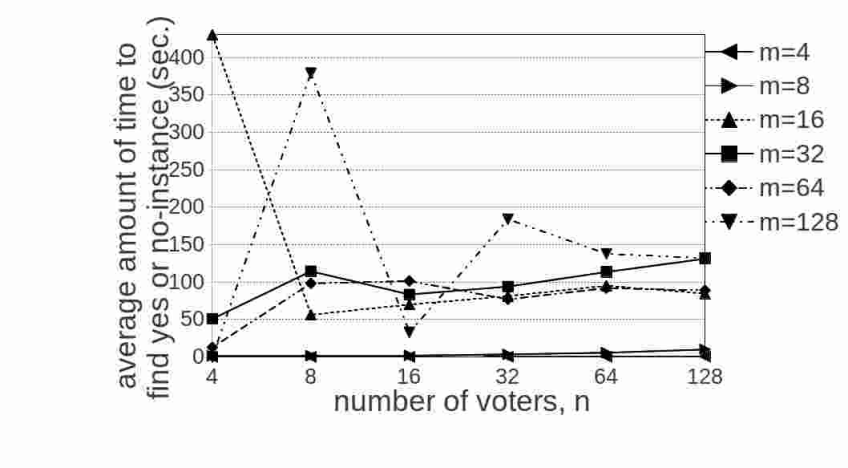


Figure 451: Average time the algorithm needs to give a definite output for constructive control by runoff-partition of candidates in model TE in plurality elections in the IC model. The maximum is 430,08 seconds.

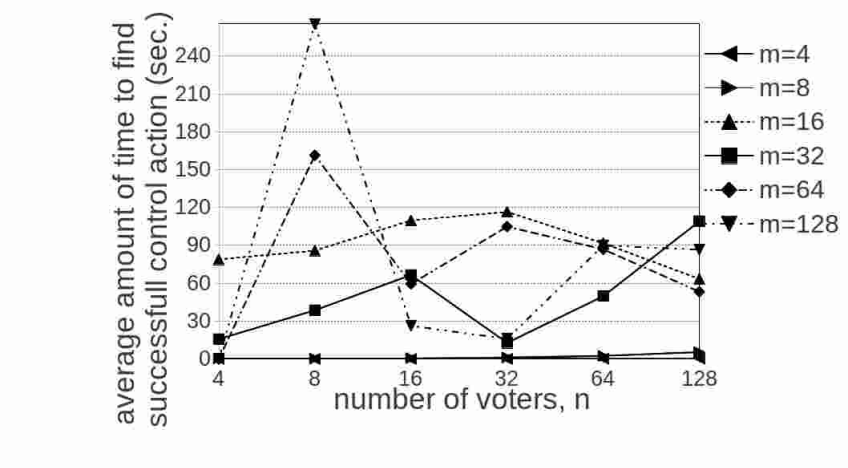


Figure 452: Average time the algorithm needs to find a successful control action for constructive control by runoff-partition of candidates in model TE in plurality elections in the TM model. The maximum is 265,22 seconds.

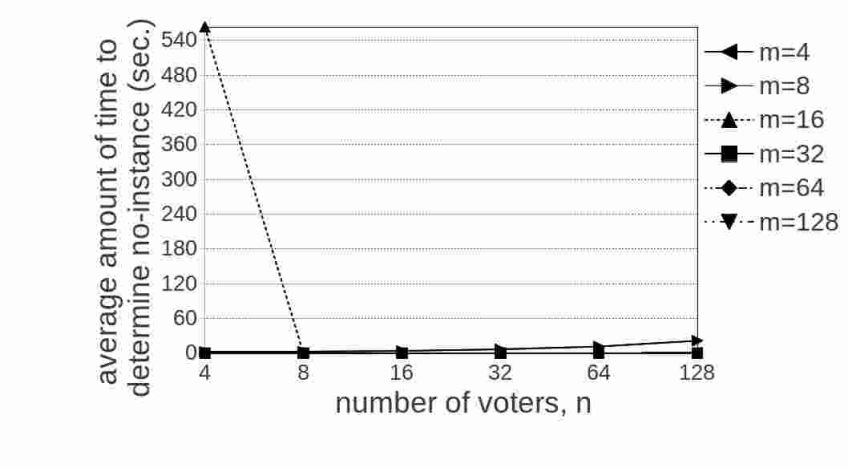


Figure 453: Average time the algorithm needs to determine no-instance of constructive control by runoff-partition of candidates in model TE in plurality elections in the TM model. The maximum is $562,86$ seconds.

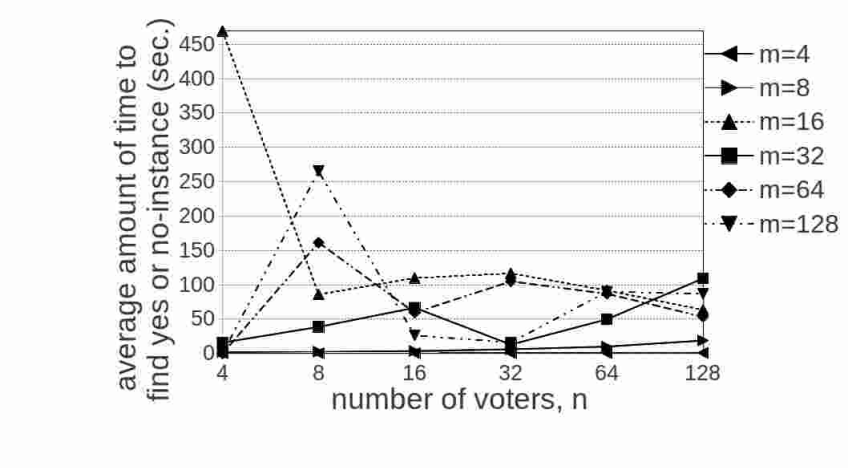


Figure 454: Average time the algorithm needs to give a definite output for constructive control by runoff-partition of candidates in model TE in plurality elections in the TM model. The maximum is $469,62$ seconds.

C.10. Destructive Control by Runoff Partition of Candidates in Model TE

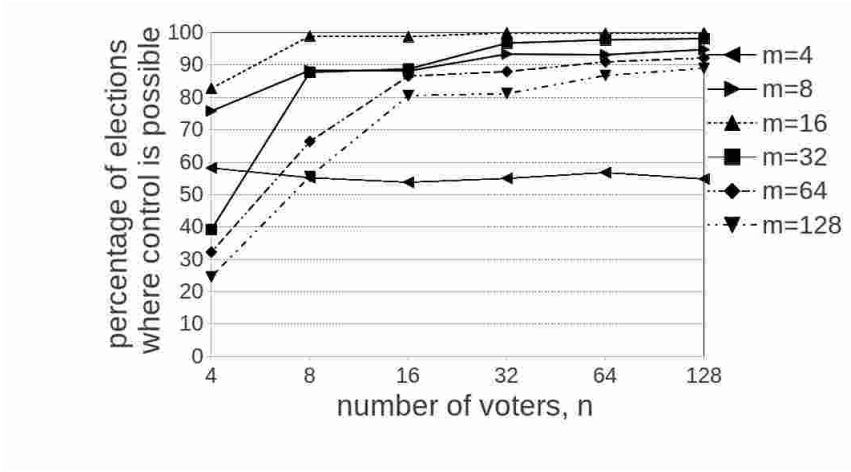


Figure 455: Results for plurality voting in the IC model for destructive control by runoff-partition of candidates in model TE. Number of candidates is fixed.

	$m=4$						$m=8$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	291	276	269	275	284	274	379	442	441	467	466	474
# ci	209	224	231	225	216	226	121	58	59	33	34	26
# to	0	0	0	0	0	0	0	0	0	0	0	0
	$m=16$						$m=32$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	414	495	494	500	499	500	196	439	444	484	489	491
# ci	86	2	0	0	0	0	11	0	0	0	0	0
# to	0	3	6	0	1	0	293	61	56	16	11	9
	$m=64$						$m=128$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	161	332	433	440	455	461	123	278	403	406	434	445
# ci	5	0	0	0	0	0	3	0	0	0	0	0
# to	334	168	67	60	45	39	374	222	97	94	66	55

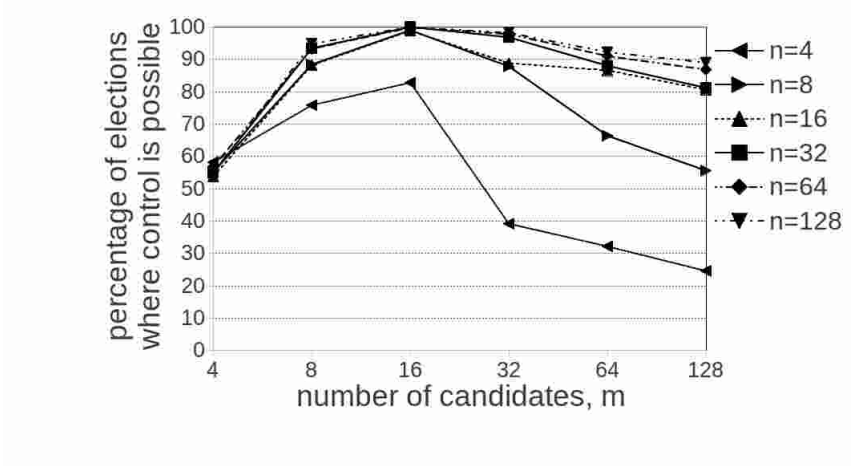


Figure 456: Results for plurality voting in the IC model for destructive control by runoff-partition of candidates in model TE. Number of voters is fixed.

	$n=4$						$n=8$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	291	379	414	196	161	123	276	442	495	439	332	278
# ci	209	121	86	11	5	3	224	58	2	0	0	0
# to	0	0	0	293	334	374	0	0	3	61	168	222
	$n=16$						$n=32$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	269	441	494	444	433	403	275	467	500	484	440	406
# ci	231	59	0	0	0	0	225	33	0	0	0	0
# to	0	0	6	56	67	97	0	0	0	16	60	94
	$n=64$						$n=128$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	284	466	499	489	455	434	274	474	500	491	461	445
# ci	216	34	0	0	0	0	226	26	0	0	0	0
# to	0	0	1	11	45	66	0	0	0	9	39	55

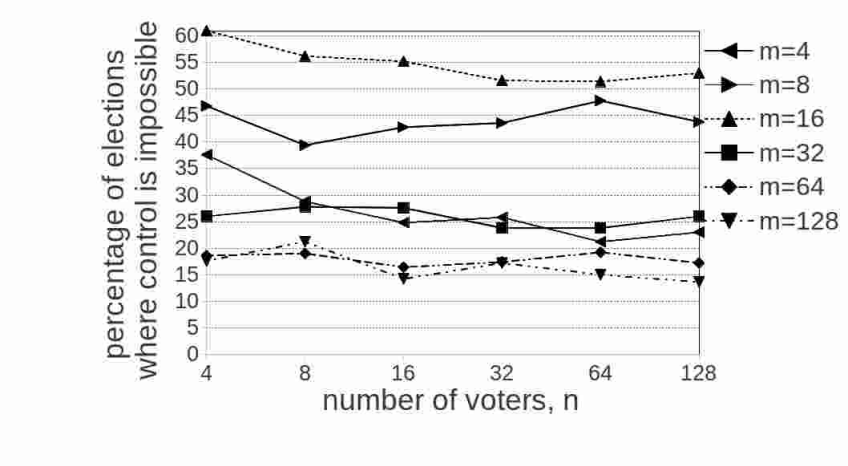


Figure 457: Results for plurality voting in the TM model for destructive control by runoff-partition of candidates in model TE. Number of candidates is fixed.

	$m=4$						$m=8$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	188	144	124	129	106	115	234	197	214	218	239	219
# ci	312	356	376	371	394	385	266	303	286	282	261	281
# to	0	0	0	0	0	0	0	0	0	0	0	0
	$m=16$						$m=32$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	305	281	276	258	257	265	130	139	138	119	119	130
# ci	195	154	105	70	39	36	192	141	66	41	19	17
# to	0	65	119	172	204	199	178	220	296	340	362	353
	$m=64$						$m=128$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	93	95	82	87	96	86	88	106	71	86	75	68
# ci	169	122	77	28	10	4	177	106	43	25	5	3
# to	238	283	341	385	394	410	235	286	386	389	420	429

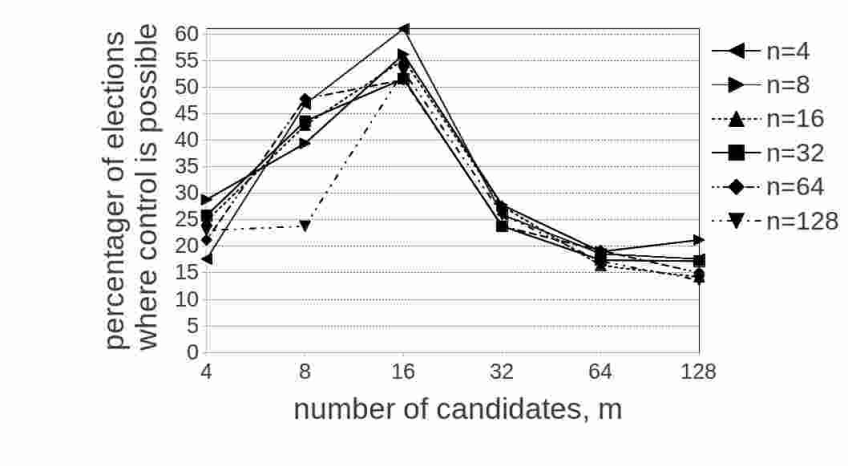


Figure 458: Results for plurality voting in the TM model for destructive control by runoff-partition of candidates in model TE. Number of voters is fixed.

	$n=4$						$n=8$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	188	234	305	130	93	88	144	197	281	139	95	106
# ci	312	266	195	192	169	177	356	303	154	141	122	106
# to	0	0	0	178	238	235	0	0	65	220	283	288
	$n=16$						$n=32$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	124	214	276	138	82	71	129	218	258	119	87	86
# ci	376	286	105	66	77	43	371	282	70	41	28	25
# to	0	0	119	296	341	386	0	0	172	340	385	389
	$n=64$						$n=128$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	106	239	257	119	96	75	115	219	265	130	86	68
# ci	394	261	39	19	10	5	385	281	36	17	4	3
# to	0	0	204	362	394	420	0	0	199	353	410	429

C.10.1. Computational Costs

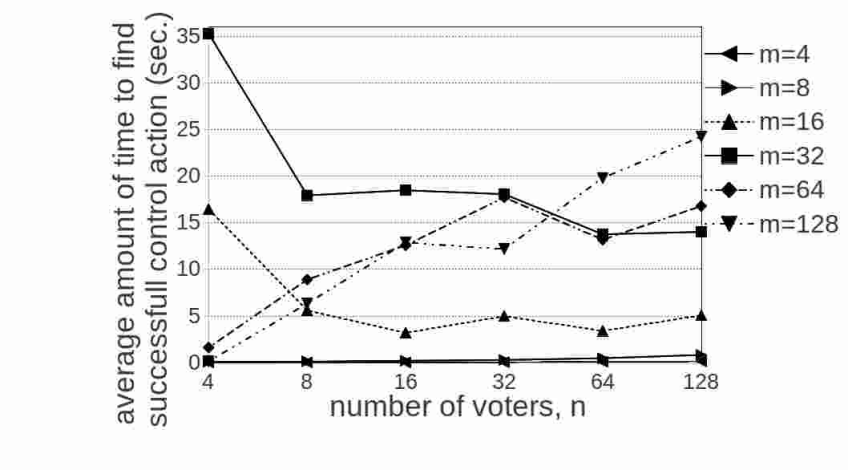


Figure 459: Average time the algorithm needs to find a successful control action for destructive control by runoff-partition of candidates in model TE in plurality elections in the IC model. The maximum is $35,3$ seconds.

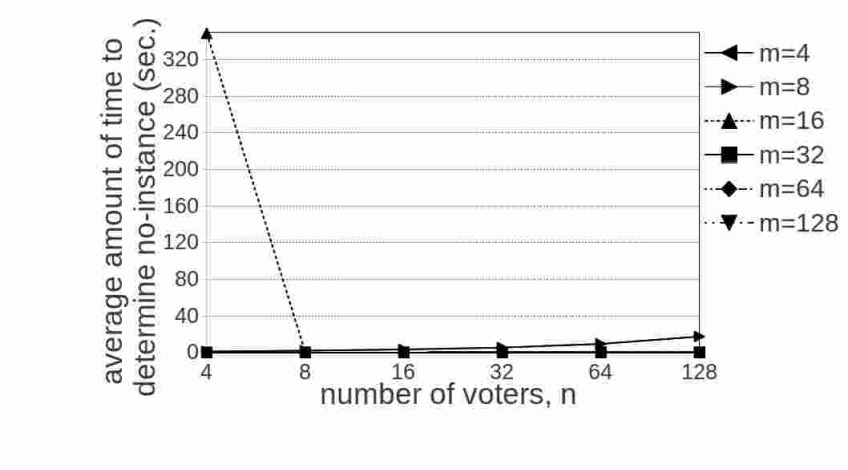


Figure 460: Average time the algorithm needs to determine no-instance of destructive control by runoff-partition of candidates in model TE in plurality elections in the IC model. The maximum is $348,65$ seconds.

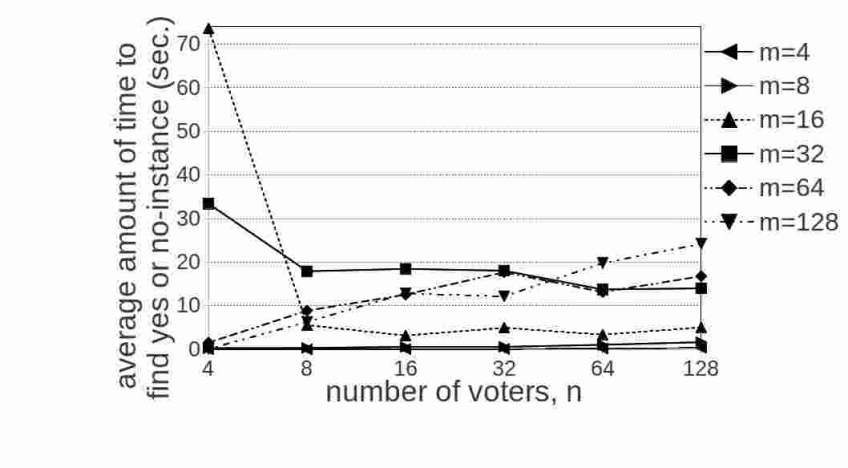


Figure 461: Average time the algorithm needs to give a definite output for destructive control by runoff-partition of candidates in model TE in plurality elections in the IC model. The maximum is 73,6 seconds.

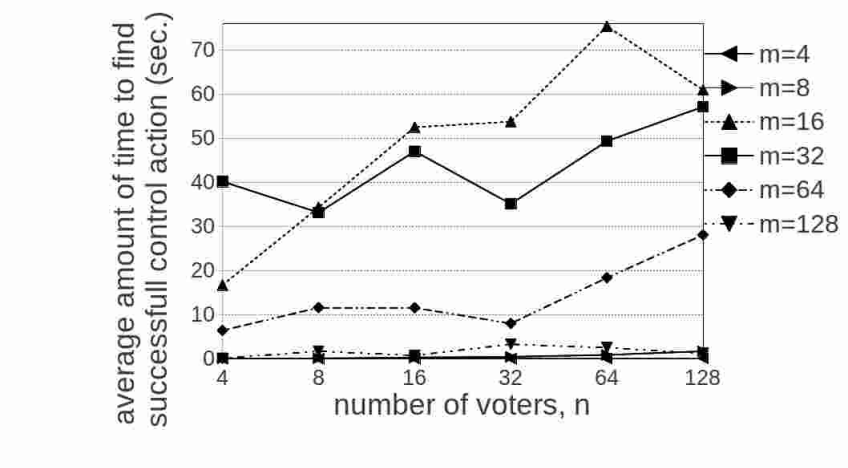


Figure 462: Average time the algorithm needs to find a successful control action for destructive control by runoff-partition of candidates in model TE in plurality elections in the TM model. The maximum is 75,31 seconds.

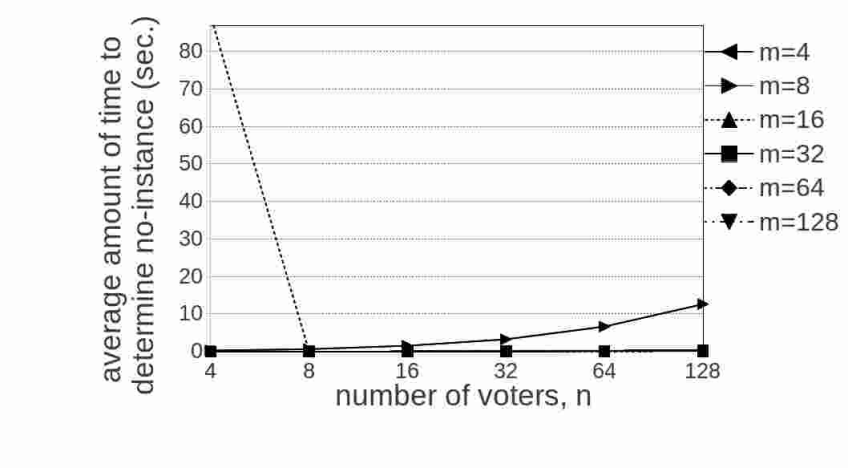


Figure 463: Average time the algorithm needs to determine no-instance of destructive control by runoff-partition of candidates in model TE in plurality elections in the TM model. The maximum is 89,69 seconds.

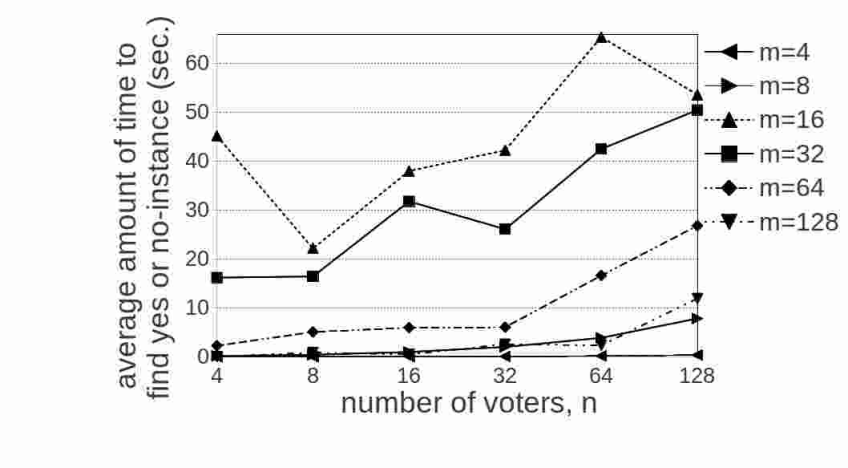


Figure 464: Average time the algorithm needs to give a definite output for destructive control by runoff-partition of candidates in model TE in plurality elections in the TM model. The maximum is 65,39 seconds.

C.11. Constructive Control by Runoff Partition of Candidates in Model TP

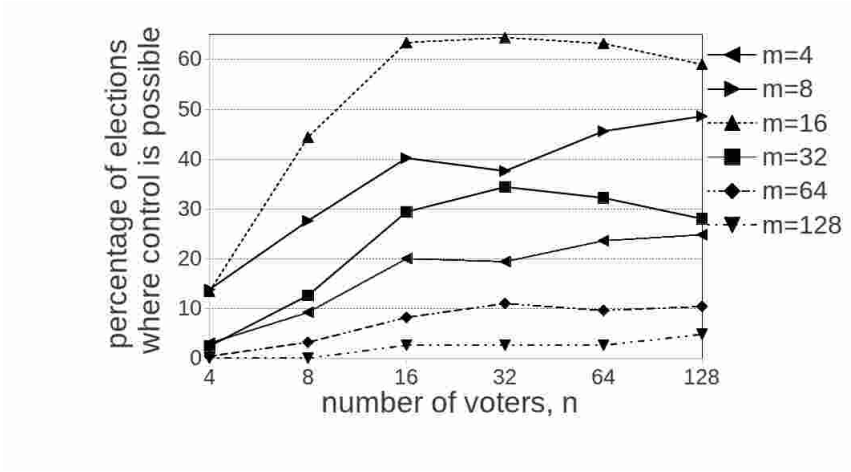


Figure 465: Results for plurality voting in the IC model for constructive control by runoff-partition of candidates in model TP. Number of candidates is fixed.

	$m=4$						$m=8$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	15	46	100	97	118	124	69	138	201	188	228	243
# ci	485	454	400	403	382	376	431	362	299	312	272	257
# to	0	0	0	0	0	0	0	0	0	0	0	0
	$m=16$						$m=32$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	67	222	317	322	316	295	12	63	147	172	161	140
# ci	433	0	0	0	0	0	0	0	0	0	0	0
# to	0	278	183	178	184	205	488	437	353	328	339	360
	$m=64$						$m=128$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	2	16	41	55	48	52	0	0	13	13	13	24
# ci	0	0	0	0	0	0	0	0	0	0	0	0
# to	498	484	459	445	452	448	500	500	487	487	487	476

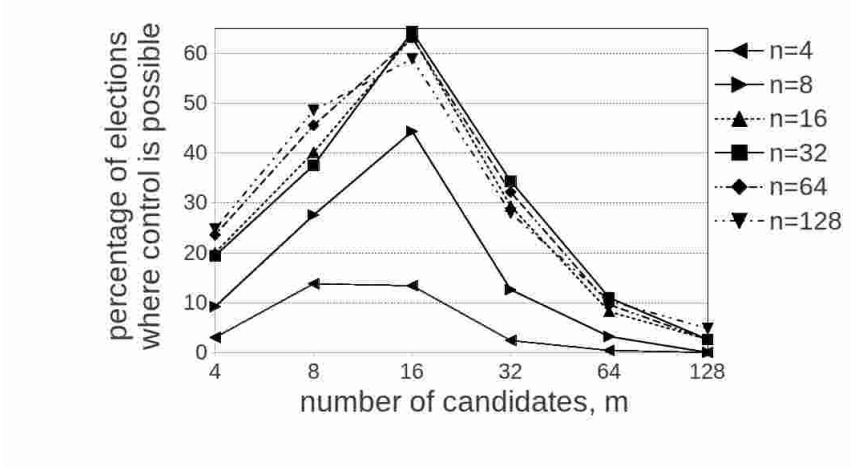


Figure 466: Results for plurality voting in the IC model for constructive control by runoff-partition of candidates in model TP. Number of voters is fixed.

	$n=4$						$n=8$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	15	69	67	12	2	0	46	138	222	63	16	0
# ci	485	431	433	0	0	0	454	362	0	0	0	0
# to	0	0	0	488	498	500	0	0	278	437	484	500
	$n=16$						$n=32$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	100	201	317	147	41	13	97	188	322	172	55	13
# ci	400	299	0	0	0	0	403	312	0	0	0	0
# to	0	0	183	353	459	487	0	0	178	328	445	487
	$n=64$						$n=128$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	118	228	316	161	48	13	124	243	295	140	52	24
# ci	382	272	0	0	0	0	376	257	0	0	0	0
# to	0	0	184	339	452	487	0	0	205	360	448	476

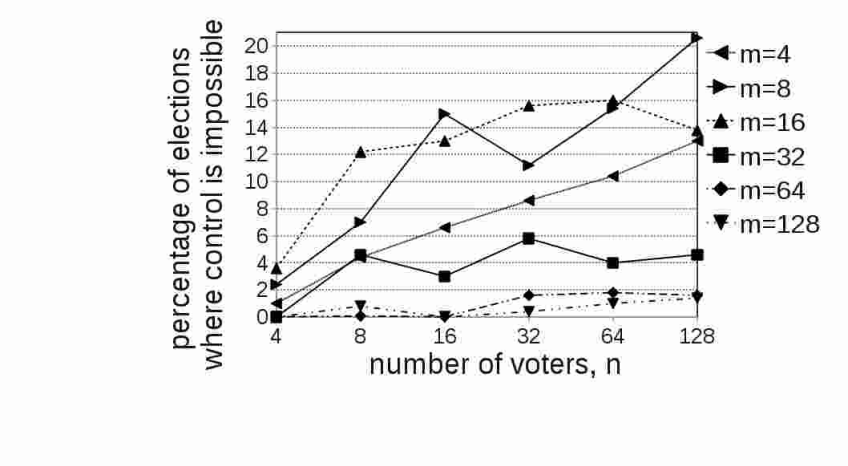


Figure 467: Results for plurality voting in the TM model for constructive control by runoff-partition of candidates in model TP. Number of candidates is fixed.

	$m=4$						$m=8$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	5	22	33	43	52	65	12	35	35	75	76	103
# ci	495	478	467	457	448	435	488	465	465	425	424	397
# to	0	0	0	0	0	0	0	0	0	0	0	0
	$m=16$						$m=32$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	18	61	65	78	80	69	0	23	15	29	20	23
# ci	482	0	0	0	0	0	0	0	0	0	0	0
# to	0	439	435	422	420	431	500	477	485	471	480	477
	$m=64$						$m=128$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	1	4	1	8	9	8	0	4	0	2	5	7
# ci	0	0	0	0	0	0	0	0	0	0	0	0
# to	499	496	499	492	491	492	500	496	500	498	495	493

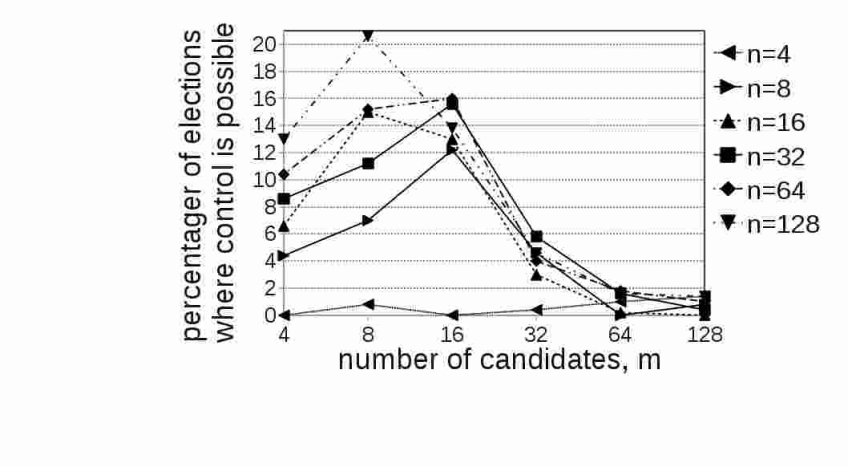


Figure 468: Results for plurality voting in the TM model for constructive control by runoff-partition of candidates in model TP. Number of voters is fixed.

	$n=4$						$n=8$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	5	12	0	2	5	7	22	35	61	23	4	4
# ci	495	488	0	0	0	0	478	465	0	0	0	0
# to	0	496	500	498	495	493	0	0	439	477	496	496
	$n=16$						$n=32$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	33	75	65	15	1	0	43	56	78	29	8	2
# ci	467	425	0	0	0	0	457	444	0	0	0	0
# to	0	0	435	485	499	500	0	0	422	471	492	498
	$n=64$						$n=128$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	52	76	80	20	9	5	65	103	69	23	8	7
# ci	448	424	0	0	0	0	435	397	0	0	0	0
# to	0	0	420	480	491	495	0	0	431	477	492	493

C.11.1. Computational Costs

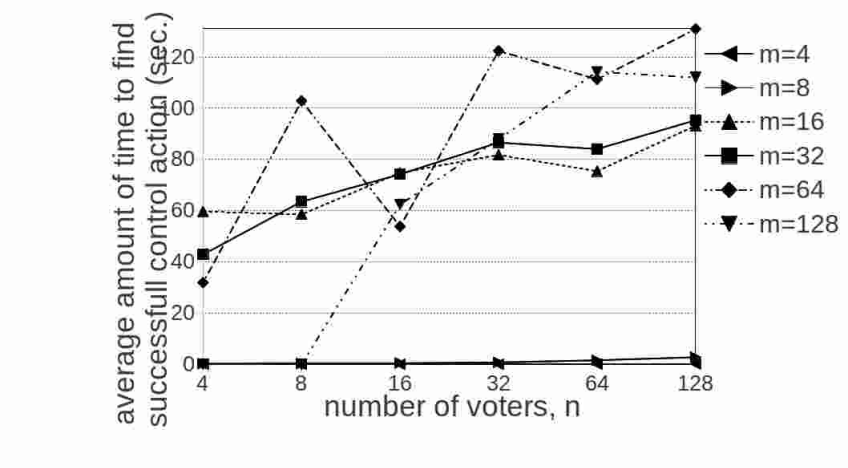


Figure 469: Average time the algorithm needs to find a successful control action for constructive control by runoff-partition of candidates in model TP in plurality elections in the IC model. The maximum is 130,91 seconds.

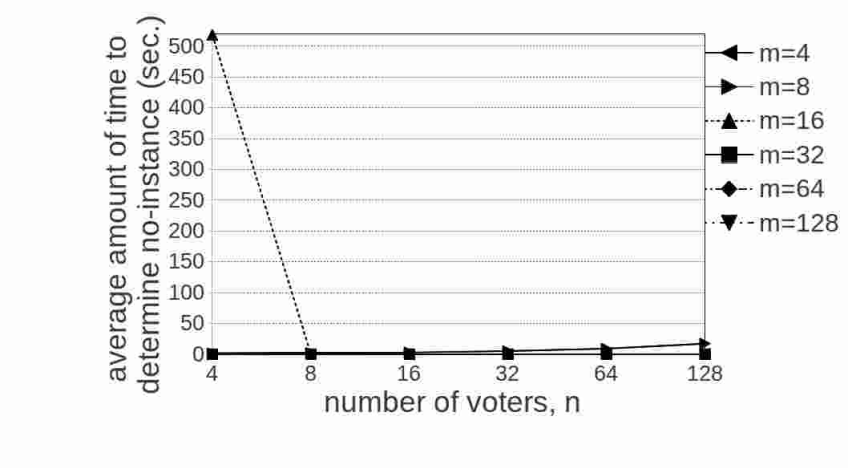


Figure 470: Average time the algorithm needs to determine no-instance of constructive control by runoff-partition of candidates in model TP in plurality elections in the IC model. The maximum is 518,67 seconds.

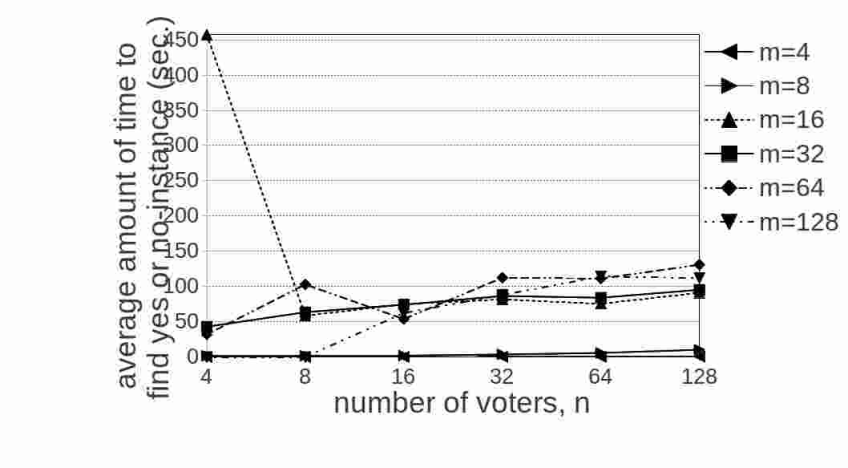


Figure 471: Average time the algorithm needs to give a definite output for constructive control by runoff-partition of candidates in model TP in plurality elections in the IC model. The maximum is 130,91 seconds.

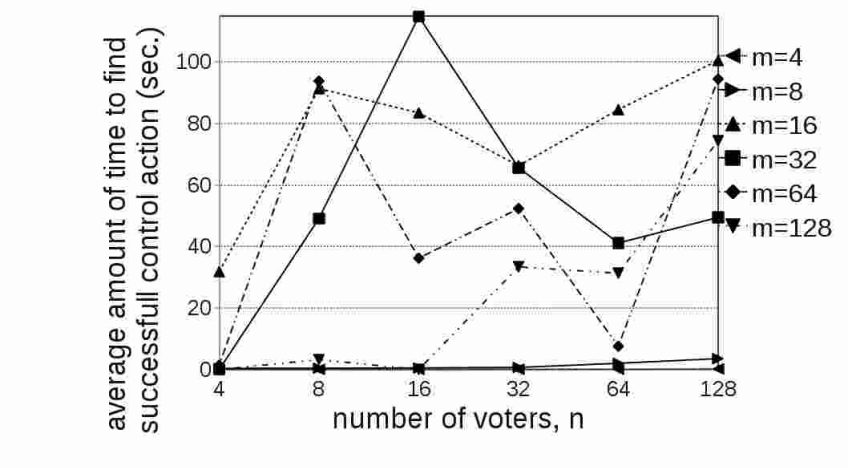


Figure 472: Average time the algorithm needs to find a successful control action for constructive control by runoff-partition of candidates in model TP in plurality elections in the TM model. The maximum is 114,84 seconds.

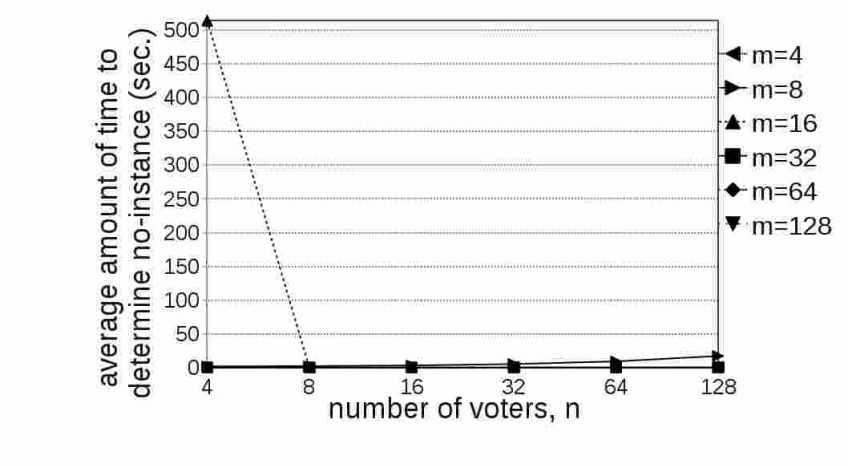


Figure 473: Average time the algorithm needs to determine no-instance of constructive control by runoff-partition of candidates in model TP in plurality elections in the TM model. The maximum is $514,44$ seconds.

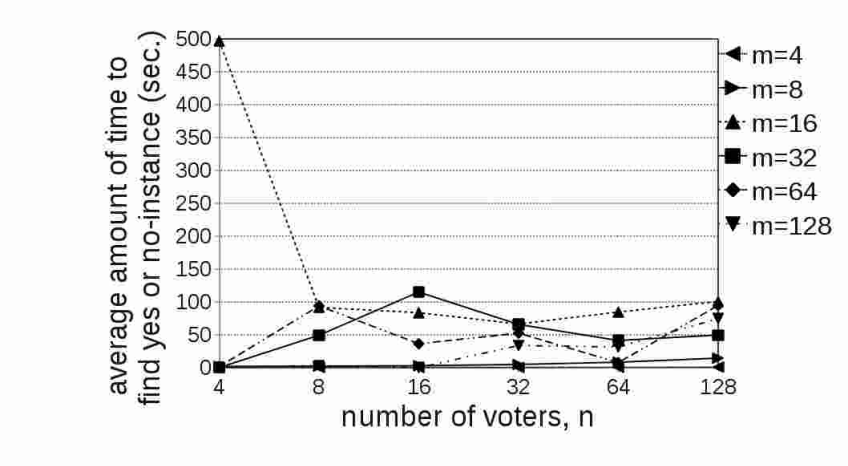


Figure 474: Average time the algorithm needs to give a definite output for constructive control by runoff-partition of candidates in model TP in plurality elections in the TM model. The maximum is $497,07$ seconds.

C.12. Destructive Control by Runoff Partition of Candidates in Model TP

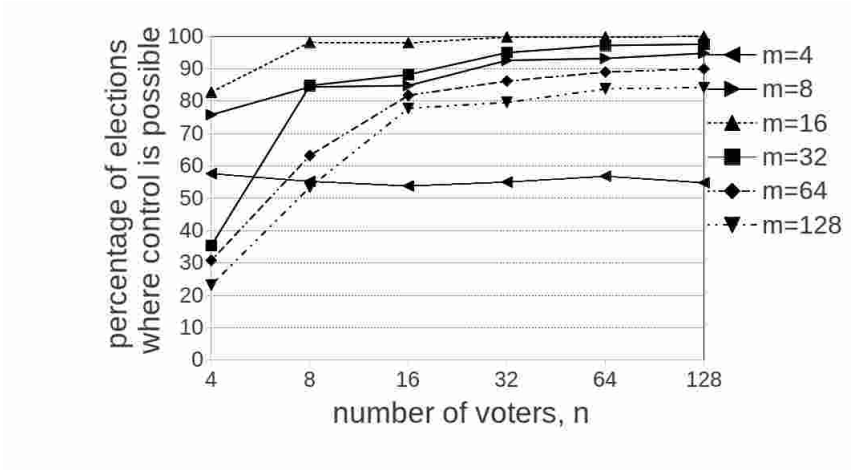


Figure 475: Results for plurality voting in the IC model for destructive control by runoff-partition of candidates in model TP. Number of candidates is fixed.

	$m=4$						$m=8$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	288	276	269	275	284	274	379	422	424	463	466	474
# ci	212	224	231	225	216	226	121	78	76	37	34	26
# to	0	0	0	0	0	0	0	0	0	0	0	0
	$m=16$						$m=32$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	414	491	490	499	499	500	177	424	441	475	486	488
# ci	86	2	0	0	0	0	11	0	0	0	0	0
# to	0	7	10	1	1	0	312	76	59	25	14	12
	$m=64$						$m=128$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	154	316	409	431	445	450	116	267	389	398	419	421
# ci	5	0	0	0	0	0	3	0	0	0	0	0
# to	341	184	91	69	55	50	381	233	111	102	81	79

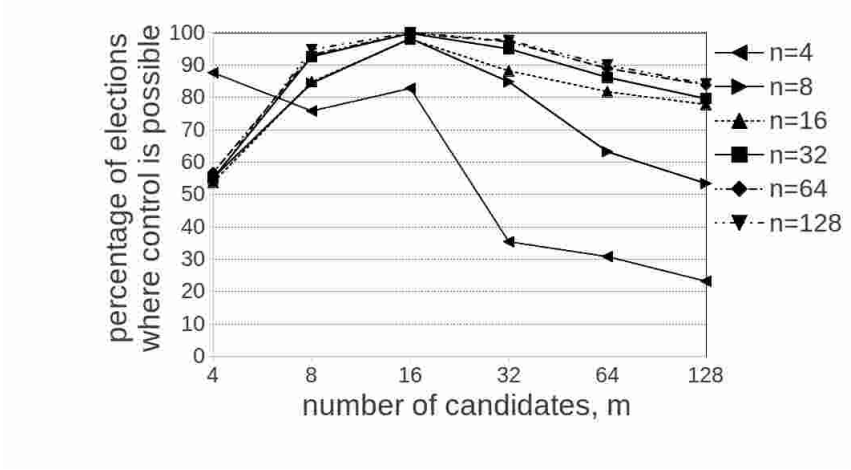


Figure 476: Results for plurality voting in the IC model for destructive control by runoff-partition of candidates in model TP. Number of voters is fixed.

	$n=4$						$n=8$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	288	379	414	177	154	116	276	422	491	424	316	267
# ci	212	121	86	11	5	3	224	78	2	0	0	0
# to	0	0	0	312	341	381	0	0	7	76	184	233
	$n=16$						$n=32$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	269	424	490	441	409	389	275	463	499	475	431	398
# ci	231	76	0	0	0	0	225	37	0	0	0	0
# to	0	0	10	59	91	111	0	0	1	25	69	102
	$n=64$						$n=128$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	284	466	499	486	445	419	274	474	500	488	450	421
# ci	216	34	0	0	0	0	226	26	0	0	0	0
# to	0	0	1	14	55	81	0	0	0	12	50	79

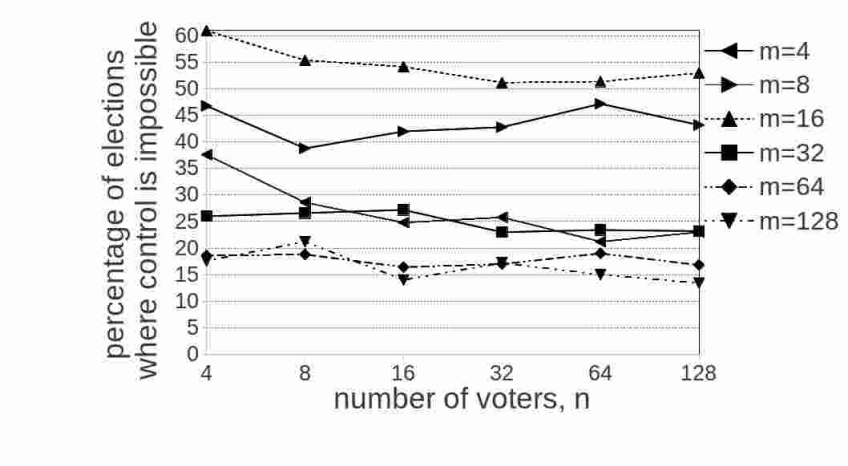


Figure 477: Results for plurality voting in the TM model for destructive control by runoff-partition of candidates in model TP. Number of candidates is fixed.

	$m=4$						$m=8$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	188	143	124	129	106	115	234	194	210	214	236	216
# ci	312	357	376	371	394	385	266	306	290	286	264	284
# to	0	0	0	0	0	0	0	0	0	0	0	0
	$m=16$						$m=32$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	305	277	271	256	257	265	130	133	136	115	117	126
# ci	195	154	105	70	39	36	192	141	66	41	19	17
# to	0	69	124	174	204	199	178	226	298	344	364	357
	$m=64$						$m=128$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	93	94	82	85	95	84	88	106	70	86	75	67
# ci	169	122	77	28	10	4	177	106	43	25	5	3
# to	238	284	341	387	395	412	235	288	387	389	420	430

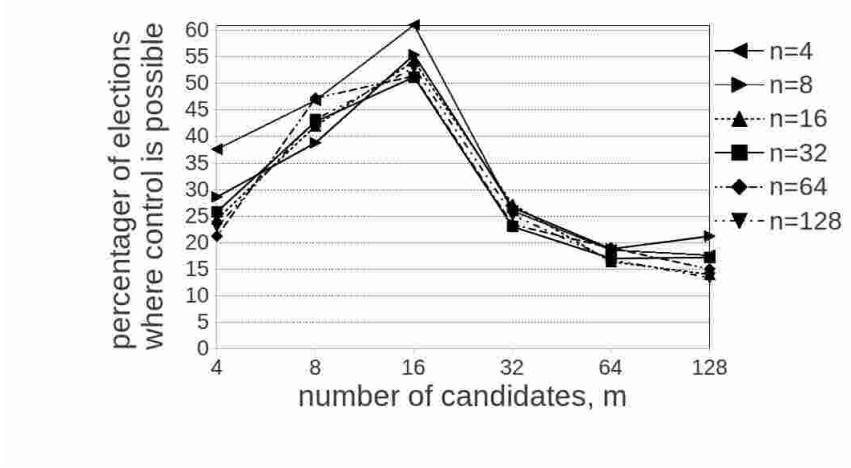


Figure 478: Results for plurality voting in the TM model for destructive control by runoff-partition of candidates in model TP. Number of voters is fixed.

	$n=4$						$n=8$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	188	234	305	130	93	88	143	194	277	133	94	106
# ci	312	266	195	192	169	177	357	306	154	141	122	106
# to	0	0	0	178	238	235	0	0	69	226	284	288
	$n=16$						$n=32$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	124	210	271	136	82	70	129	214	256	115	85	86
# ci	376	290	105	66	77	43	371	286	7	41	28	25
# to	0	0	124	298	341	387	0	0	174	344	387	389
	$n=64$						$n=128$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	106	236	257	117	95	75	115	216	265	126	84	67
# ci	394	264	39	19	10	5	385	284	36	17	4	3
# to	0	0	204	364	395	420	0	0	199	357	412	430

C.12.1. Computational Costs

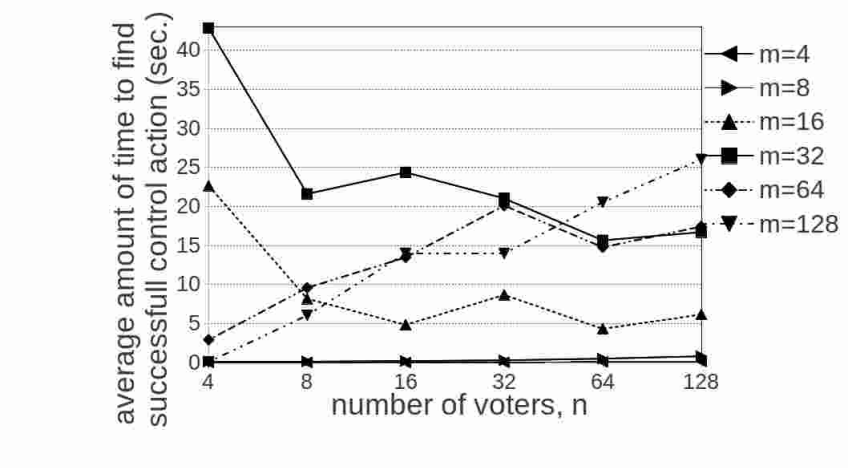


Figure 479: Average time the algorithm needs to find a successful control action for destructive control by runoff-partition of candidates in model TP in plurality elections in the IC model. The maximum is 42,85 seconds.

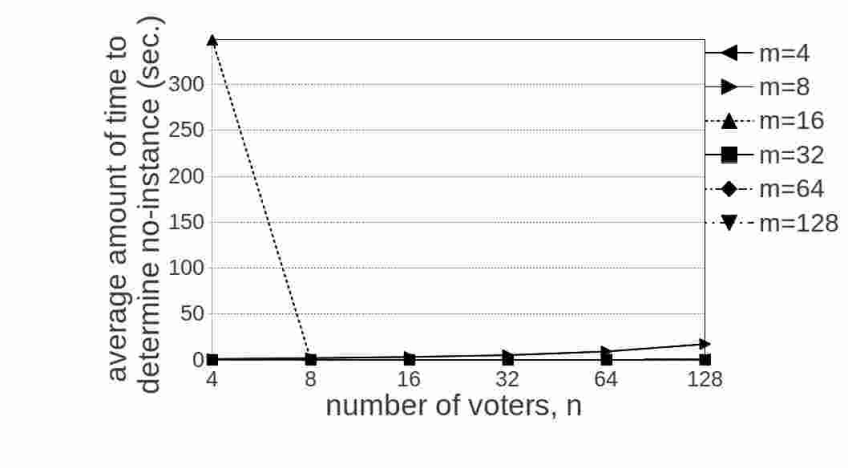


Figure 480: Average time the algorithm needs to determine no-instance of destructive control by runoff-partition of candidates in model TP in plurality elections in the IC model. The maximum is 348,43 seconds.

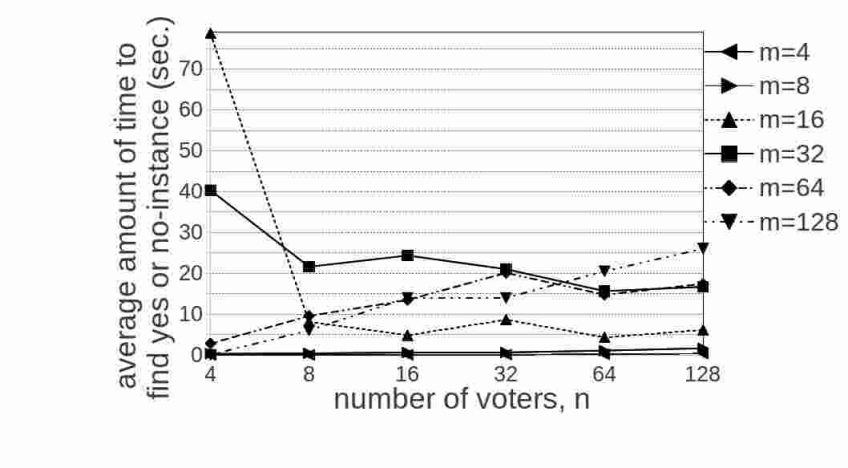


Figure 481: Average time the algorithm needs to give a definite output for destructive control by runoff-partition of candidates in model TP in plurality elections in the IC model. The maximum is $78,7$ seconds.

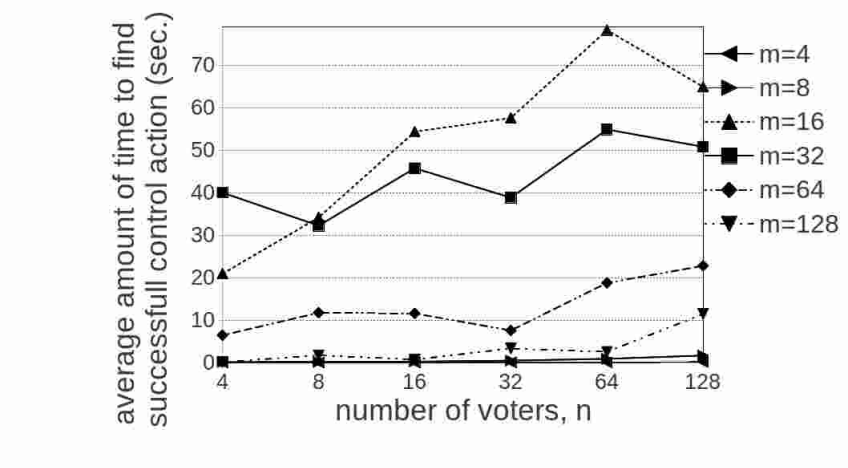


Figure 482: Average time the algorithm needs to find a successful control action for destructive control by runoff-partition of candidates in model TP in plurality elections in the TM model. The maximum is $78,26$ seconds.

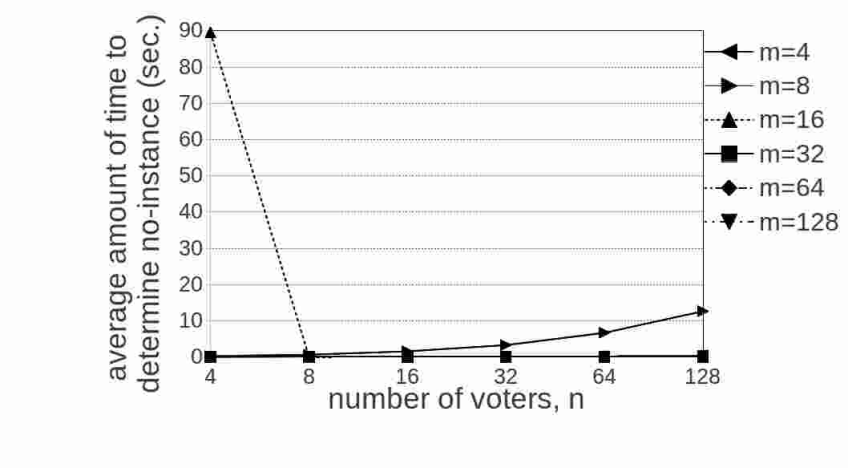


Figure 483: Average time the algorithm needs to determine no-instance of destructive control by runoff-partition of candidates in model TP in plurality elections in the TM model. The maximum is 89,53 seconds.

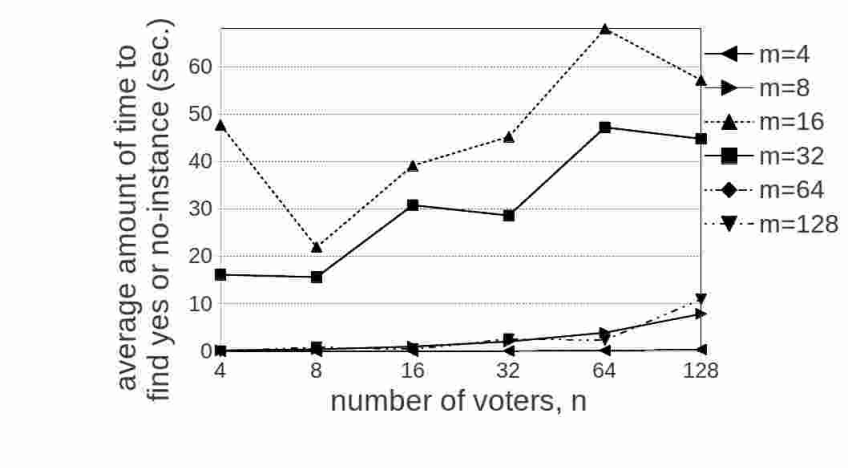


Figure 484: Average time the algorithm needs to give a definite output for destructive control by runoff-partition of candidates in model TP in plurality elections in the TM model. The maximum is 67,95 seconds.

C.13. Constructive Control by Partition of Voters in Model TP

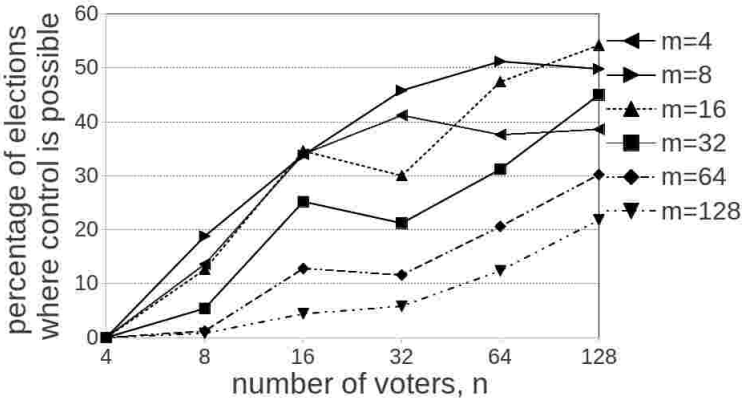


Figure 485: Results for plurality voting in the IC model for constructive control by partition of voters in model TP. Number of candidates is fixed.

	$m=4$						$m=8$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	0	68	170	206	188	193	0	94	169	229	256	248
# ci	500	432	330	0	0	0	500	406	331	5	0	0
# to	0	0	0	294	312	307	0	0	0	266	244	252
	$m=16$						$m=32$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	0	63	173	150	237	271	0	29	126	106	156	225
# ci	500	437	327	73	8	0	500	471	302	195	64	9
# to	0	0	0	277	277	229	0	0	72	199	280	266
	$m=64$						$m=128$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	0	6	64	58	103	151	0	4	22	29	62	109
# ci	500	494	401	323	179	77	500	496	429	387	306	188
# to	0	0	35	119	218	272	0	0	44	84	133	204

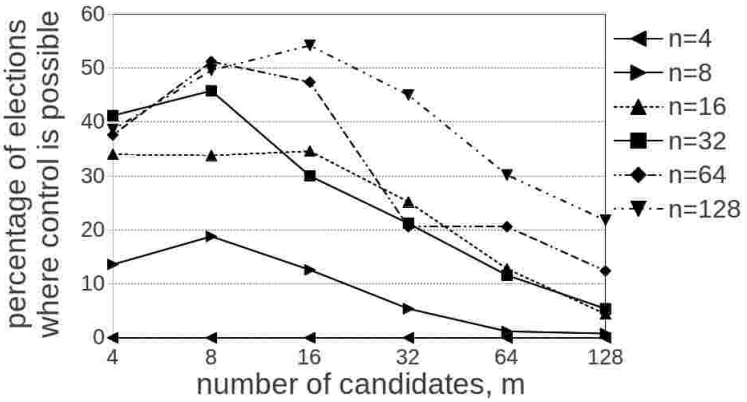


Figure 486: Results for plurality voting in the IC model for constructive control by partition of voters in model TP. Number of voters is fixed.

	$n=4$						$n=8$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	0	0	0	0	0	0	68	94	63	29	6	4
# ci	500	500	500	500	500	500	432	406	437	471	494	496
# to	0	0	0	0	0	0	0	0	0	0	0	0
	$n=16$						$n=32$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	170	169	173	126	64	22	206	229	150	106	58	29
# ci	330	331	327	302	401	429	0	5	73	195	323	387
# to	0	0	0	72	35	44	294	266	277	199	119	84
	$n=64$						$n=128$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	188	256	237	156	103	62	193	248	271	225	151	109
# ci	0	0	8	64	179	306	0	0	0	9	77	188
# to	312	244	255	280	218	133	307	252	229	266	272	204

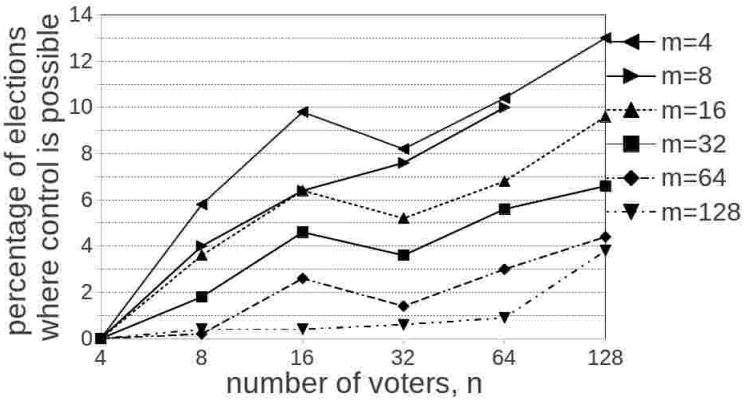


Figure 487: Results for plurality voting in the TM model for constructive control by partition of voters in model TP. Number of candidates is fixed.

	$m=4$						$m=8$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	0	29	49	41	52	65	0	20	32	38	50	51
# ci	500	471	451	198	158	131	500	480	468	191	89	68
# to	0	0	0	261	290	304	0	0	0	271	361	381
	$m=16$						$m=32$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	0	18	32	26	34	48	0	9	23	18	28	33
# ci	500	482	468	266	144	59	500	491	416	335	254	140
# to	0	0	0	208	322	393	0	0	61	147	218	327
	$m=64$						$m=128$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	0	1	13	7	15	22	0	2	2	3	9	19
# ci	500	499	457	423	344	250	500	498	479	455	433	350
# to	0	0	3	7	141	280	0	0	19	42	58	131

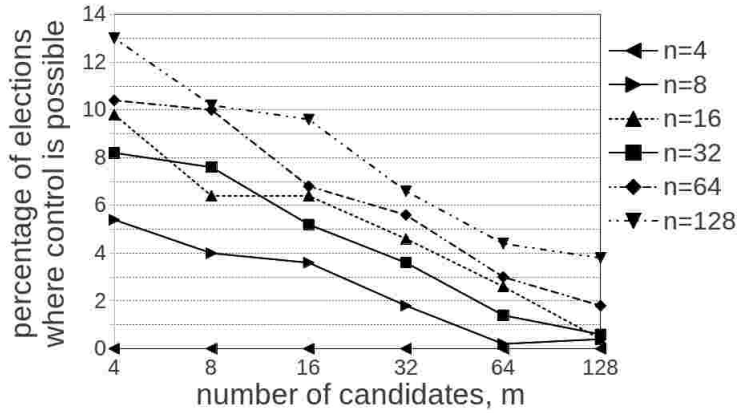


Figure 488: Results for plurality voting in the TM model for constructive control by partition of voters in model TP. Number of voters is fixed.

	$n=4$						$n=8$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	0	0	0	0	0	0	29	20	18	9	1	2
# ci	500	0	500	500	500	500	471	480	482	491	499	498
# to	0	0	0	0	0	0	0	0	0	0	0	0
	$n=16$						$n=32$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	49	32	32	23	13	2	41	38	26	18	7	3
# ci	451	468	468	416	457	479	198	191	266	335	423	455
# to	0	0	0	61	3	19	261	271	208	147	7	42
	$n=64$						$n=128$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	52	50	34	28	15	9	65	51	48	33	22	19
# ci	158	89	144	254	344	433	131	68	59	140	250	350
# to	290	361	322	218	141	58	304	381	393	327	228	131

C.13.1. Computational Costs

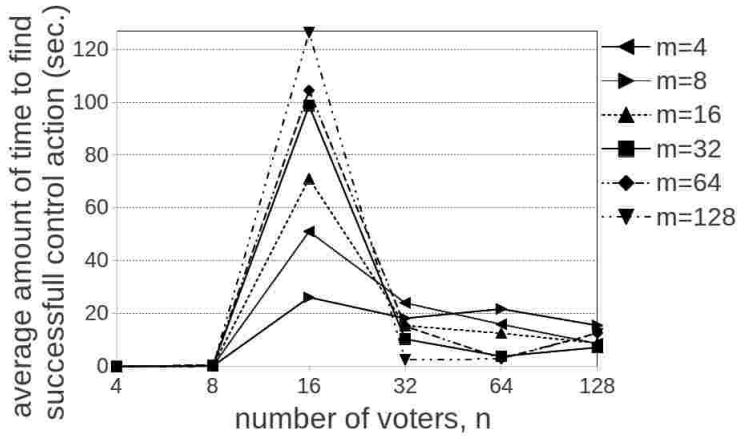


Figure 489: Average time the algorithm needs to find a successful control action for constructive control by partition of voters in model TP in plurality elections in the IC model. The maximum is 126,26 seconds.

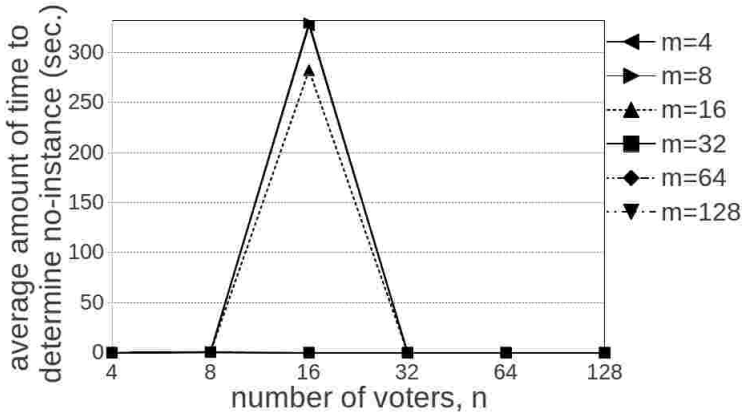


Figure 490: Average time the algorithm needs to determine no-instance of constructive control by partition of voters in model TP in plurality elections in the IC model. The maximum is 329,07 seconds.

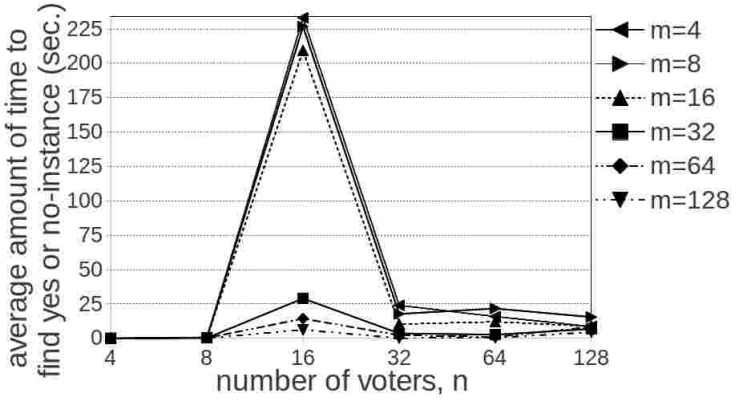


Figure 491: Average time the algorithm needs to give a definite output for constructive control by partition of voters in model TP in plurality elections in the IC model. The maximum is 226,68 seconds.

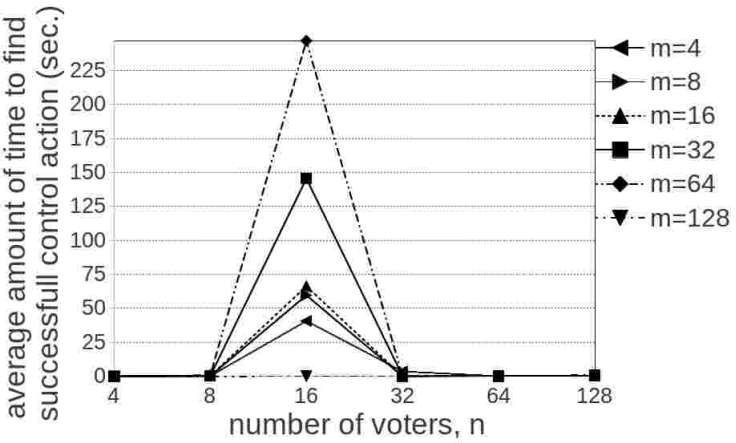


Figure 492: Average time the algorithm needs to find a successful control action for constructive control by partition of voters in model TP in plurality elections in the TM model. The maximum is 246,85 seconds.

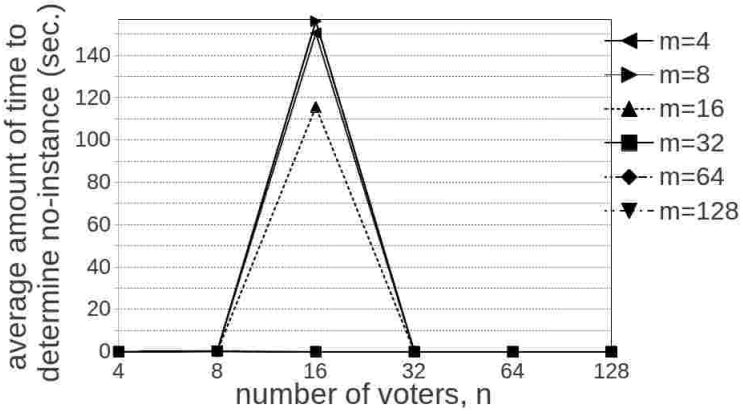


Figure 493: Average time the algorithm needs to determine no-instance of constructive control by partition of voters in model TP in plurality elections in the TM model. The maximum is $156,07$ seconds.

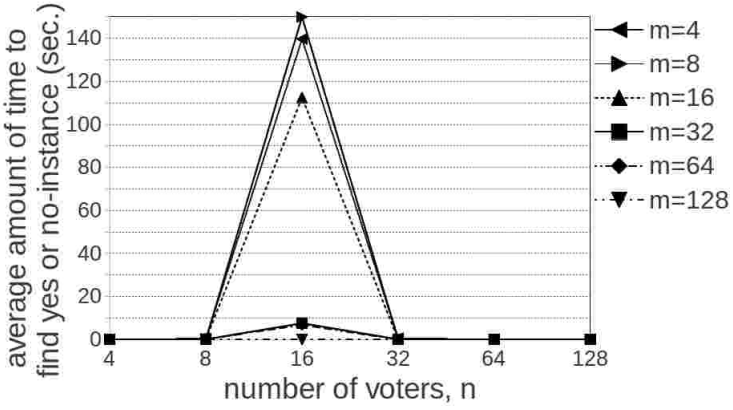


Figure 494: Average time the algorithm needs to give a definite output for constructive control by partition of voters in model TP in plurality elections in the TM model. The maximum is $149,9$ seconds.

C.14. Destructive Control by Partition of Voters in Model TP

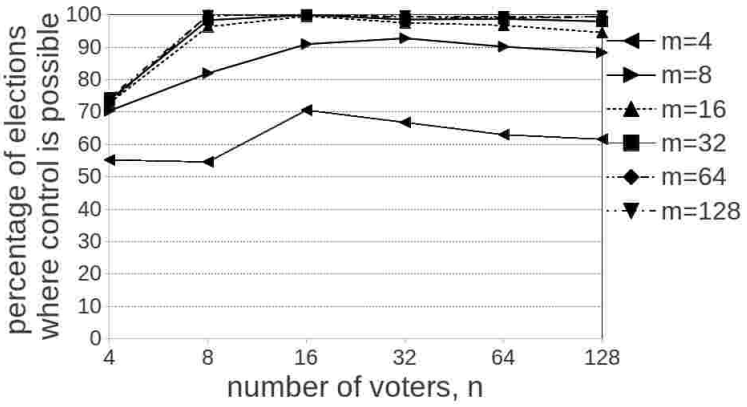


Figure 495: Results for plurality voting in the IC model for destructive control by partition of voters in model TP. Number of candidates is fixed.

	$m=4$						$m=8$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	276	273	353	334	315	308	352	410	455	464	451	442
# ci	224	227	147	0	0	0	148	90	45	0	0	0
# to	0	0	0	166	185	192	0	0	0	36	49	58
	$m=16$						$m=32$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	364	482	498	488	484	473	369	492	500	493	494	490
# ci	136	18	2	0	0	0	131	8	0	0	0	0
# to	0	0	0	12	16	27	0	0	0	7	6	10
	$m=64$						$m=128$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	365	500	500	497	496	497	372	499	500	498	497	498
# ci	135	0	0	0	0	0	128	1	0	0	0	0
# to	0	0	0	3	4	3	0	0	0	2	3	2

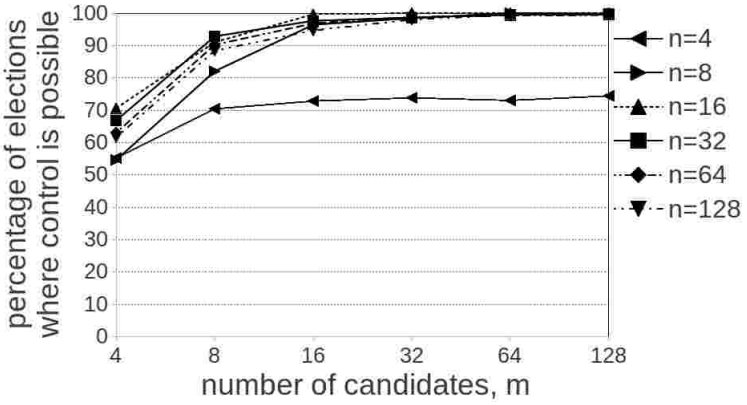


Figure 496: Results for plurality voting in the IC model for destructive control by partition of voters in model TP. Number of voters is fixed.

	$n=4$						$n=8$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	276	352	364	369	365	372	273	410	482	492	500	499
# ci	224	148	136	131	135	128	227	90	18	8	0	1
# to	0	0	0	0	0	0	0	0	0	0	0	0
	$n=16$						$n=32$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	353	455	498	500	500	500	334	464	488	493	497	498
# ci	147	45	2	0	0	0	0	0	0	0	0	0
# to	0	0	0	0	0	0	166	36	12	7	3	2
	$n=64$						$n=128$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	315	451	484	494	496	497	308	442	473	490	497	498
# ci	0	0	0	0	0	0	0	0	0	0	0	0
# to	185	49	16	6	4	3	192	58	27	10	3	2

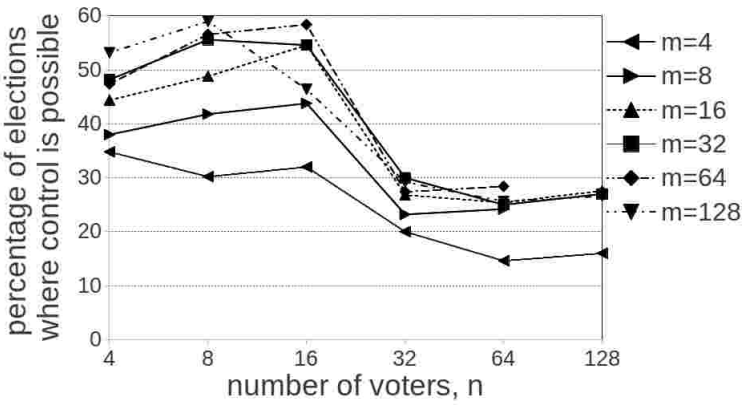


Figure 497: Results for plurality voting in the TM model for destructive control by partition of voters in model TP. Number of candidates is fixed.

	$m=4$						$m=8$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	174	151	160	100	73	80	190	209	219	116	121	97
# ci	326	349	340	208	168	118	310	291	281	119	81	60
# to	0	0	0	192	259	302	0	0	0	265	298	343
	$m=16$						$m=32$					
n	4	8	16	32	64	128	4	8	16	32	64	128
# cp	222	244	273	134	127	138	241	278	273	150	125	135
# ci	278	256	227	64	41	26	259	222	92	46	20	14
# to	0	0	0	302	332	336	0	0	135	304	355	351
	$m=64$						$m=128$					
n	2	8	16	32	64	128	4	8	16	32	64	128
# cp	237	283	292	137	142	121	266	295	232	146	128	133
# ci	263	217	71	28	7	9	234	205	66	22	10	4
# to	0	0	137	335	351	370	0	0	202	332	362	363

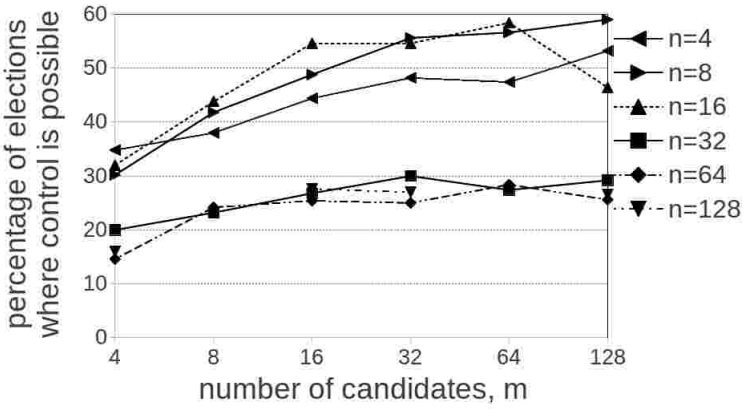


Figure 498: Results for plurality voting in the TM model for destructive control by partition of voters in model TP. Number of voters is fixed.

	$n=4$						$n=8$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	174	190	222	241	237	266	151	209	244	278	283	295
# ci	326	310	278	259	263	234	349	291	256	222	217	205
# to	0	0	0	0	0	0	0	0	0	0	0	0
	$n=16$						$n=32$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	160	219	273	273	292	232	100	116	134	150	137	146
# ci	340	281	227	92	71	66	208	119	64	46	28	22
# to	0	0	0	135	137	202	192	265	302	304	335	332
	$n=64$						$n=128$					
m	4	8	16	32	64	128	4	8	16	32	64	128
# cp	73	121	127	125	142	128	80	97	138	135	121	133
# ci	168	81	41	20	7	0	118	60	26	14	9	0
# to	259	298	332	355	351	362	302	343	336	351	370	363

C.14.1. Computational Costs

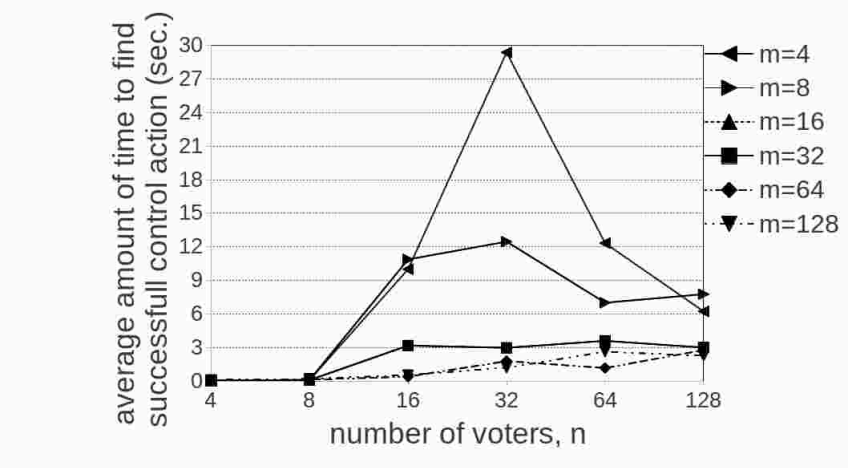


Figure 499: Average time the algorithm needs to find a successful control action for destructive control by partition of voters in model TP in plurality elections in the IC model. The maximum is 29,37 seconds.

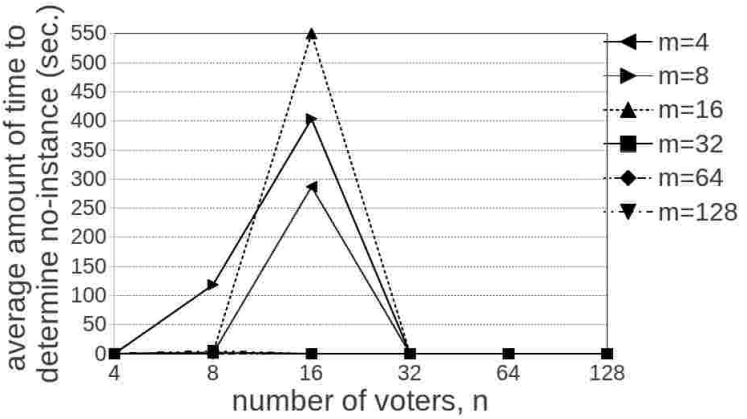


Figure 500: Average time the algorithm needs to determine no-instance of destructive control by partition of voters in model TP in plurality elections in the IC model. The maximum is 550,39 seconds.

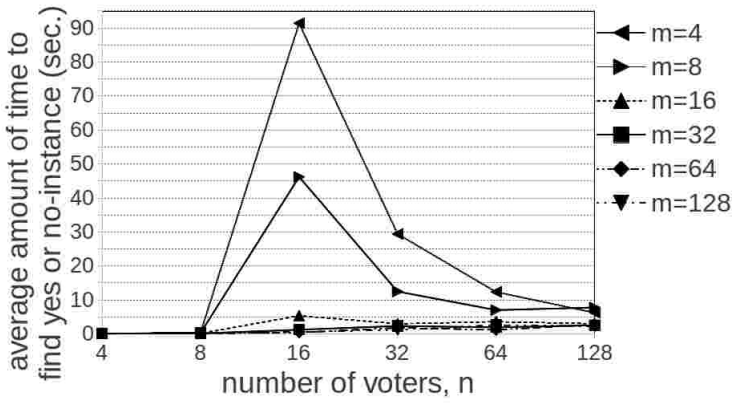


Figure 501: Average time the algorithm needs to give a definite output for destructive control by partition of voters in model TP in plurality elections in the IC model. The maximum is 91,41 seconds.

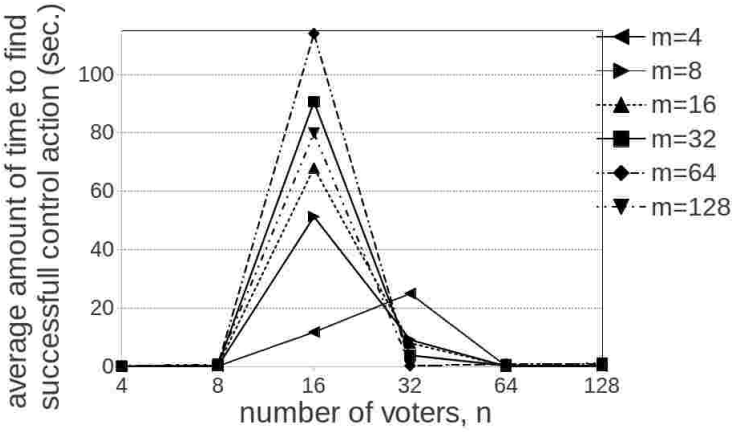


Figure 502: Average time the algorithm needs to find a successful control action for destructive control by partition of voters in model TP in plurality elections in the TM model. The maximum is 114 seconds.

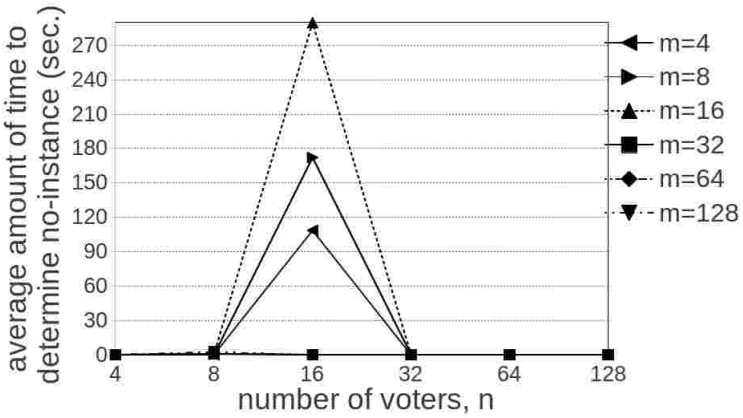


Figure 503: Average time the algorithm needs to determine no-instance of destructive control by partition of voters in model TP in plurality elections in the TM model. The maximum is 289,7 seconds.

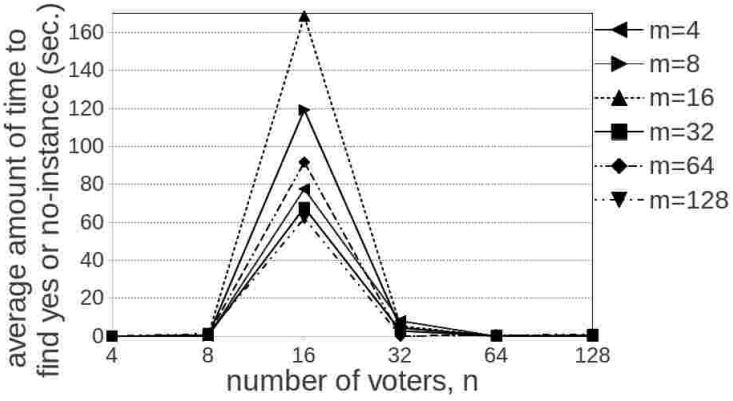


Figure 504: Average time the algorithm needs to give a definite output for destructive control by partition of voters in model TP in plurality elections in the TM model. The maximum is 168,63 seconds.